
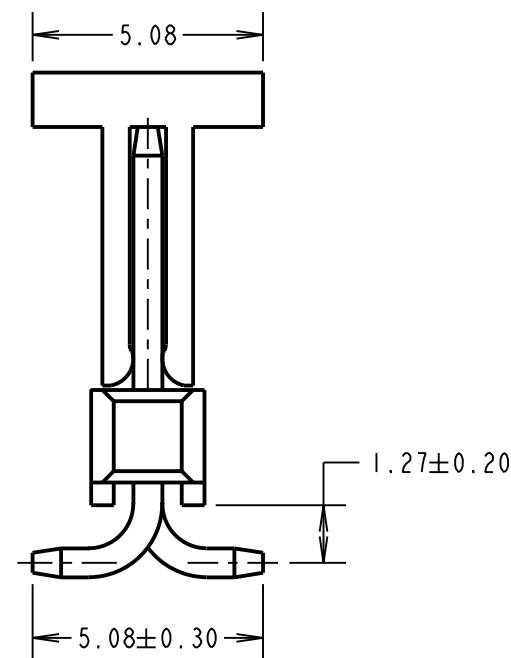
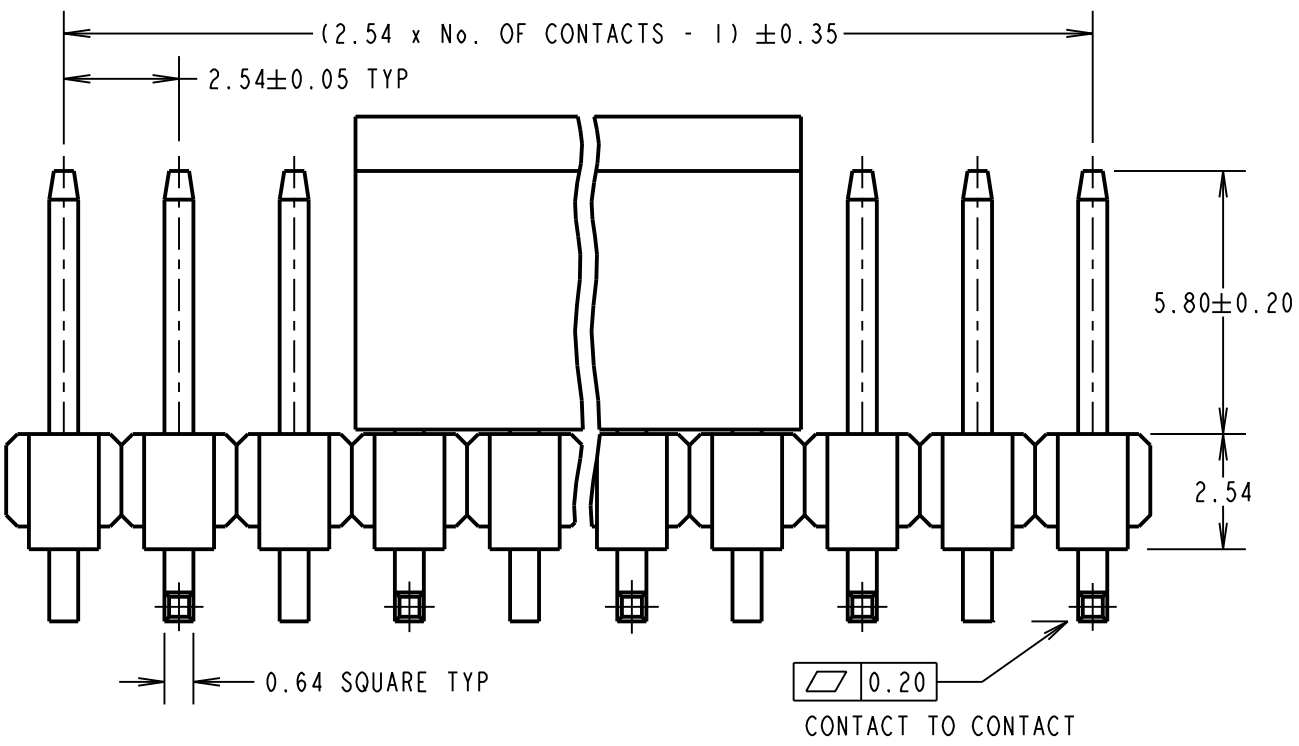
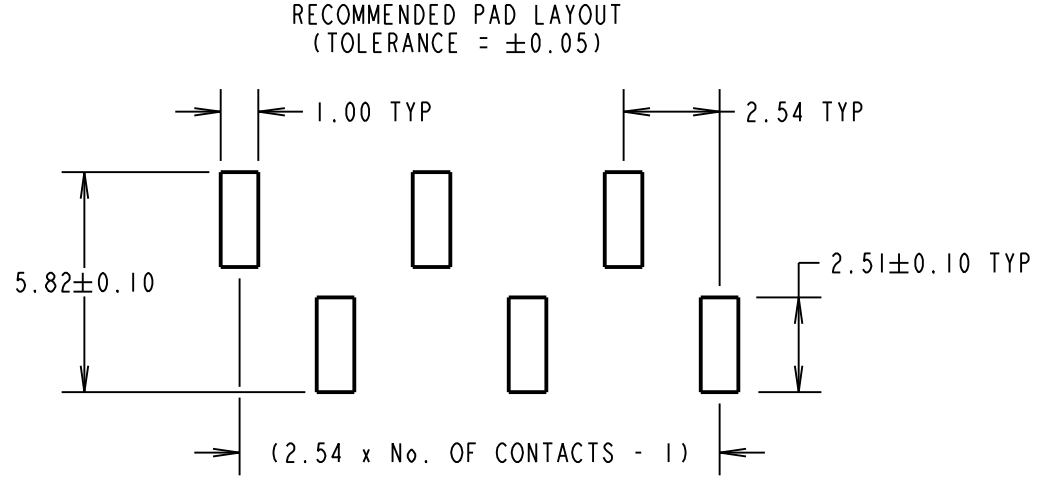


Customer Information Sheet

DRAWING No.: M20-877XXXXP SHEET 2 OF 2 IF IN DOUBT - ASK (C) NOT TO SCALE THIRD ANGLE PROJECTION ALL DIMENSIONS IN mm

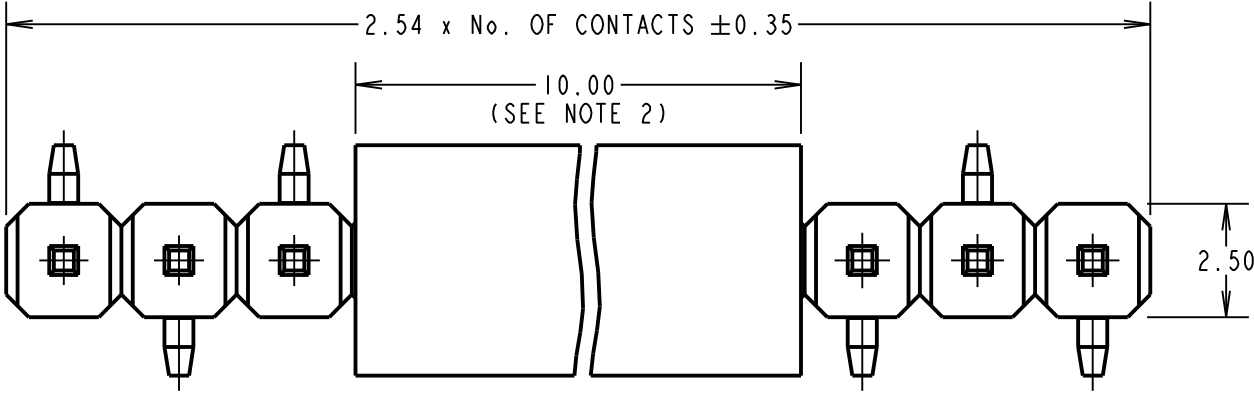

SPECIFICATION:
MATERIAL:
MOULDING = NYLON 6T UL94V-0, BLACK
CONTACT = BRASS
FINISH:
42 = SELECTIVE GOLD ON CONTACT AREA,
100% TIN ON TAILS
46 = 100% TIN
ELECTRICAL:
CURRENT RATING = 3A MAX
CONTACT RESISTANCE = 20mΩ MAX
INSULATION RESISTANCE = 1,000MΩ MIN
VOLTAGE RATING = 750V AC/DC
WITHSTANDING VOLTAGE = 500V AC FOR ONE MIN
MECHANICAL:
DURABILITY = 50 OPERATIONS (TIN), 300 OPERATIONS (GOLD)
ENVIRONMENTAL:
TEMPERATURE RANGE = -40°C TO +105°C
PACKING:
BAG
FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION
C001XX (LATEST ISSUE)

ORDER CODE:
M20-877XXXXP
No. OF CONTACTS: _____
02 TO 36
FINISH: _____
42 = SELECTIVE GOLD + 100% TIN
46 = 100% TIN

SB	7	05.03.15	12764
NAME	ISS.	DATE	C/NOTE
APPROVED:		S.BENNETT	
CHECKED:		M.PLESTED	
DRAWN:		J. KEIR	
CUSTOMER REF.:			
ASSEMBLY DRG:			

NOTES:
1. SEE DRAWING M20-877XXXXR FOR TAPE AND REELED VERSION, M20-877XXXX FOR STANDARD PRODUCT.
2. FOR 4 CONTACTS AND LESS, CAP LENGTH = 6.00mm.
3. ALL TOLERANCES ARE ±0.15mm UNLESS OTHERWISE STATED.

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
X = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED

MATERIAL:	SEE ABOVE
FINISH:	SEE ABOVE
S/AREA:	mm²

TITLE:	2.54mm PITCH SIL SMT PIN HEADER ASSEMBLY WITH PICK & PLACE CAP
DRAWING NUMBER:	M20-877XXXXP
SHT	2 OF 2