

Customer Information Sheet

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------



DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

DRAWING No.: M22-254XXXX	SHEET 2 OF 2	IF IN DOUBT - ASK	(C)	NOT TO SCALE	THIRD ANGLE PROJECTION	ALL DIMENSIONS IN mm
--------------------------	--------------	-------------------	-----	--------------	------------------------	----------------------

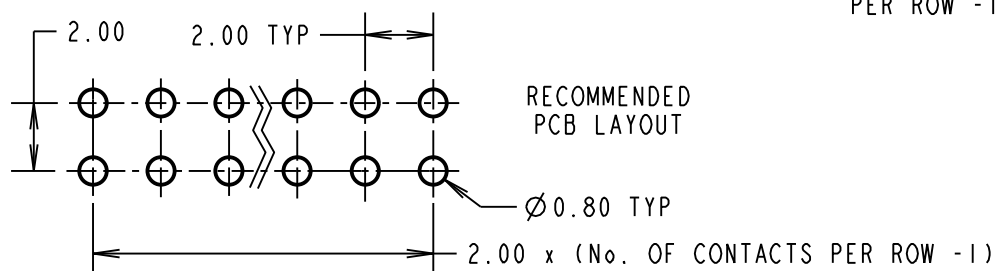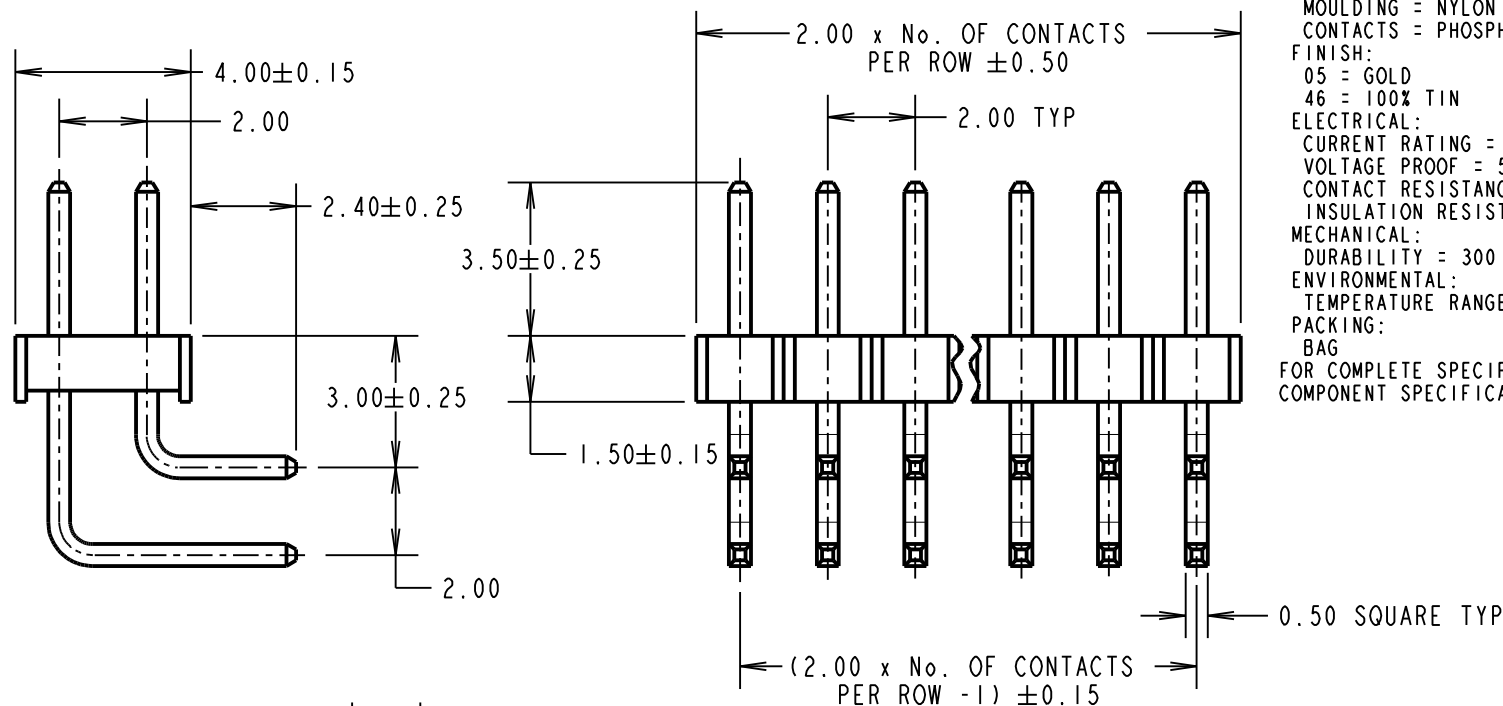

NOTES:
1. ALL TOLERANCES ARE ± 0.20 UNLESS OTHERWISE STATED.

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 6T, UL94V-0, BLACK

CONTACTS = PHOSPHOR BRONZE

FINISH:

05 = GOLD

46 = 100% TIN

ELECTRICAL:

CURRENT RATING = 2A

VOLTAGE PROOF = 500V AC

CONTACT RESISTANCE = 20mΩ MAX

INSULATION RESISTANCE = 1,000M Ω MIN

MECHANICAL:
DURABILITY = 300 OPERATIONS (GOLD), 50 OPERATIONS (TIN)

ENVIRONMENTAL:

TEMPERATURE RANGE = -55°C TO +105°C

PACKING:

BAG

FOR COMPLETE SPECIFICATION, SEE
COMPONENT SPECIFICATION C018XX (LATEST ISSUE)

ORDER CODE:

M22-254XXXX

No. OF CONTACTS PER ROW:-
02 TO 20

FINISH: _____
05 - GOLD OVER NICKEL
46 = 100% TIN OVER NICKEL

MSP	6	15.06.15	12803
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		A. G. LIOTTA	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

~~X. = ±1mm
X.X = ±0.50mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED~~

MATERIAL:

SEE ABOVE

FINISH: SEE ABOVE

S/AREA:

mm²

TITLE:

TITLE: 2.00mm PITCH DIL
HORIZONTAL PC TAIL PIN HDR

DRAWING NUMBER:

M22-254XXXX

SHT
2
OF 2