


M24308/4-1Z

D-Sub Connector

DSUB 9 M CRIMP G50 ZINC

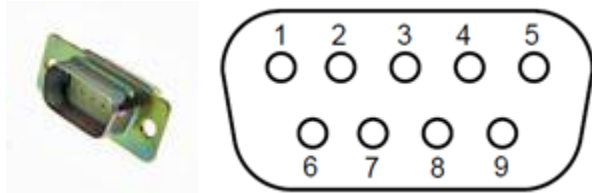

PRODUCT INFORMATION

Specification:	MIL-DTL-24308
Shielding:	Yes
Connector Type:	Rectangular
Connector Style:	Plug
Mounting Type:	Cable or Box - Front Mount - Thru Holes
Contacts, # of:	9
Contact Style:	Pin
Termination Method:	Crimp
Crimp Wire Gauge:	24,22,20
Insert Arrangement:	9
Contact Size:	#20
Contacts Supplied:	Yes
Contact Material:	Copper Alloy
Contact Plating:	50 microinches Gold Plate
Shell Material:	Steel
Shell Plating:	Yellow Chromate over Zinc
Shell Color:	Yellow
Insert Material:	Thermoplastic UL94VO
Grommet & Seals Material:	Silicone
Amperage Rating:	7.5A
Operating Voltage AC V RMS Max:	300
Operating Temperature °F (°C):	-67 to +257 (-55 to +125)
Contact Mating Life:	500
RoHS:	No
Weight (lbs):	0.01162
Weight (g):	5.27260