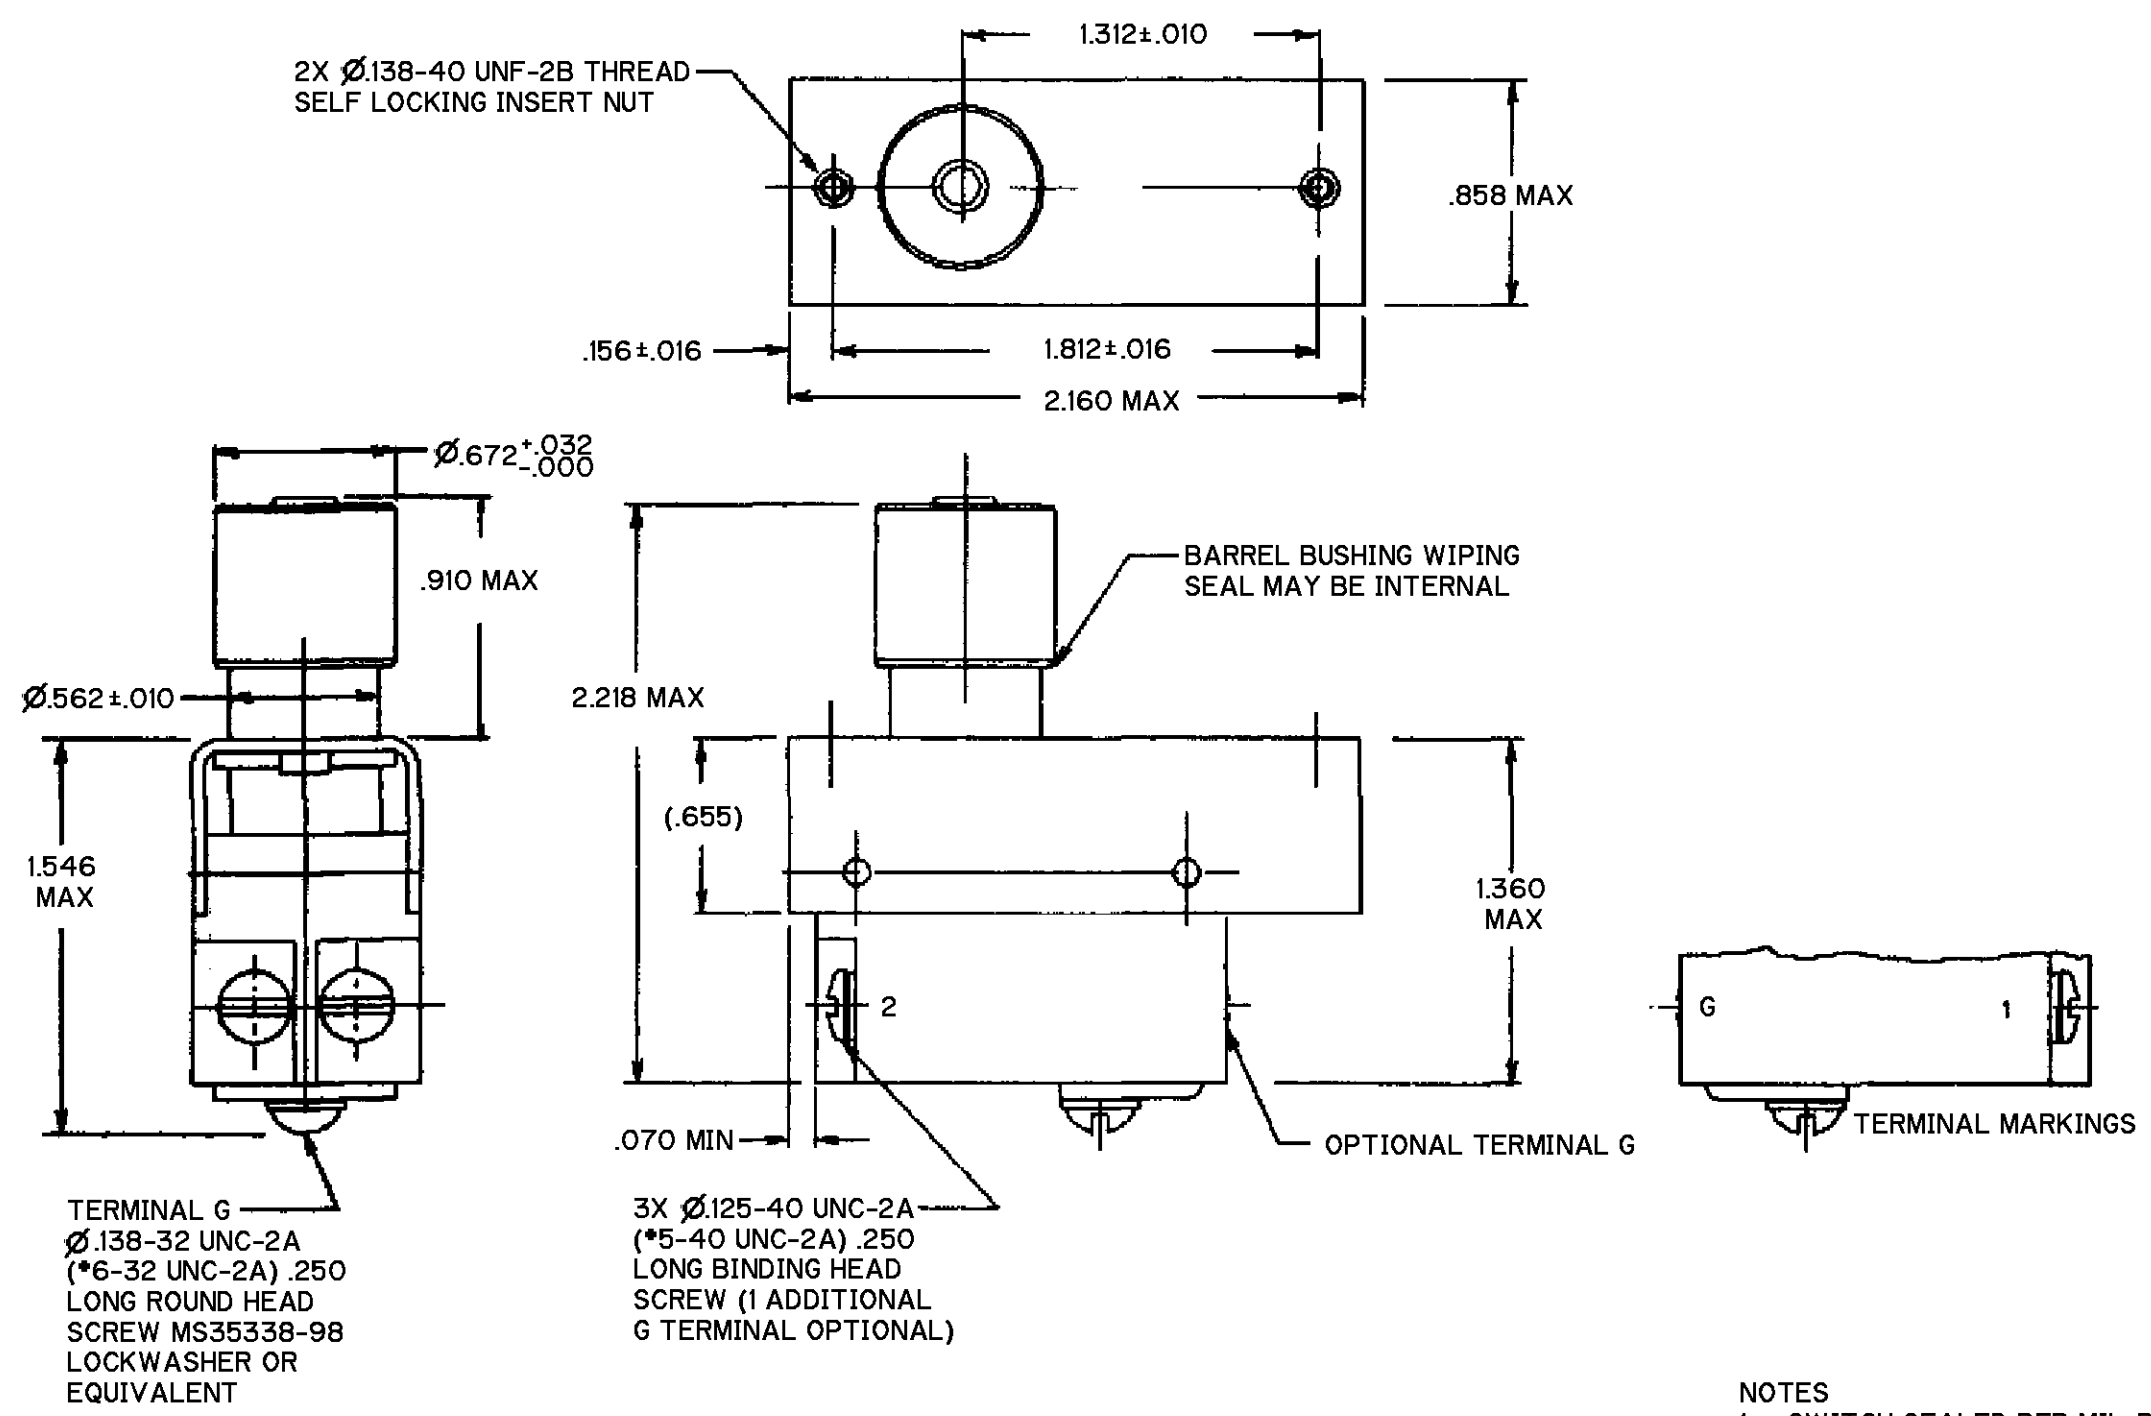




MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH - ENCLOSED

CATALOG LISTING
JS-551
M8805/55-001



- NOTES
- 1 - SWITCH SEALED PER MIL-PRF-8805, SYMBOL 1
 - 2 - TERMINAL HARDWARE PACKET FURNISHED UNASSEMBLED:
15PA308-JS INCLUDES BUSS BRACKET AND TERMINAL SCREWS
 - 3 - MICRO SWITCH, MANUFACTURER'S CAGE CODE, CATALOG LISTING,
MILITARY PART NUMBER AND DATE CODE IDENTIFIED ON SIDE OF SWITCH
 - 4 - OPERATING TEMPERATURE RANGE: -40°C TO +85°C

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH				THIRD ANGLE PROJECTION 	
CHARACTERISTICS		ELECTRICAL DATA		SCALE NONE	
ACTUATING FORCE ----- 7 - 11 LBS		CONTACT ARRANGEMENT D P S T - N O		DO NOT SCALE PRINT	
FULL OVERTRAVEL FORCE----- 20 LBS MAX				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE	
RELEASE FORCE----- .5 LB MIN		28 VDC		ONE PLACE (.0) ±.030	
PRETRAVEL----- .090 MIN				TWO PLACE (.00) ±.015	
DIFFERENTIAL TRAVEL----- .050 MIN		RATED LOAD OVERLOAD		THREE PLACE (.000) ±.005	
OVERTRAVEL ----- .050 MIN		INDUCTIVE .75 1.75		ANGLES ±	
TOTAL TRAVEL ----- .165 MIN				WEIGHT .25 LB MAX	
				CIRCUIT DIAGRAM 	

ANSI Y14.5M-1982 APPLIES