

METAL BRAID

- EMI, RFI, ESD Protection
- Grounding Straps
- Engine Dress-Up
- Complies With CID A-A-59569
- Extreme Blowout Protection
- Expands For Easy Installation
- Cut And Abrasion Resistant



Cut Cleanly
 Scissors

Material
 Tinned Copper


Grade
 MBN

Wire Thickness
 .005" - .010"

Put-Ups

Nominal Size	Part #	Wall Thickness	Wire Thickness	Bulk Spool	Shop Spool	Available Colors	Lbs/100'
1/16"	MBN0.06SV	0.013"	0.005"	250'	100'	Silver	0.40
1/8"	MBN0.13SV	0.013"	0.005"	250'	100'	Silver	1.30
5/32"	MBN0.16SV	0.013"	0.005"	250'	100'	Silver	2.10
1/4"	MBN0.25SV	0.013"	0.005"	250'	100'	Silver	2.20
3/8"	MBN0.38SV	0.013"	0.005"	250'	100'	Silver	3.30
1/2"	MBN0.50SV	0.013"	0.005"	100'	50'	Silver	3.50
5/8"	MBN0.63SV	0.016"	0.006"	100'	50'	Silver	3.60
25/32"	MBN0.78SV	0.013"	0.005"	100'	50'	Silver	7.35
7/8"	MBN0.88SV	0.025"	0.010"	100'	50'	Silver	10.30
1"	MBN1.00SV	0.025"	0.010"	100'	50'	Silver	13.15
1 1/8"	MBN1.13SV	0.025"	0.010"	100'	50'	Silver	13.80
1 3/8"	MBN1.38SV	0.025"	0.010"	100'	50'	Silver	16.90
1 1/2"	MBN1.50SV	0.025"	0.010"	100'	50'	Silver	18.40
2 1/4"	MBN2.25SV	0.025"	0.010"	100'	50'	Silver	23.60
HEAVY DUTY CONSTRUCTION							
1/2"	MBH0.50SV	0.025"	0.010"	100'	50'	Silver	12.00
FLAT CONSTRUCTION							
1/8"	MFN0.13SV	0.013"	0.005"	250'	100'	Silver	0.70
3/16"	MFN0.19SV	0.013"	0.005"	250'	100'	Silver	1.10
1/4"	MFN0.25SV	0.013"	0.005"	250'	100'	Silver	2.00
3/8"	MFN0.38SV	0.013"	0.005"	250'	100'	Silver	2.40
5/8"	MFN0.63SV	0.013"	0.005"	100'	50'	Silver	3.60
3/4"	MFN0.75SV	0.013"	0.005"	100'	50'	Silver	7.70

Colors Available:
 Silver (SV)

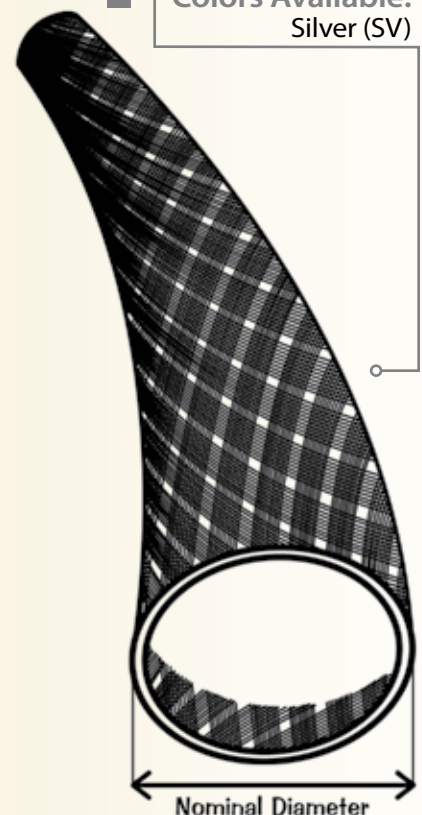

Tinned Copper Sleeve For Shielding, Grounding And Decoration

Our skill with braided sleeving extends to many materials including metal braid for a variety of applications. Our tinned copper braid is perfect for shielding on harnesses and cables. Wire conforms to ASTM-B 33.

The material is also great for hose covering on hot rods and motorcycles.



www.techflex.com

800.323.5140 • 973.300.9242 • fax: 973.300.9409
 29 Brookfield Dr • Sparta, NJ 07871



METAL BRAID



Rating ____ Non Flammable




Chemical Resistance

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

- Aromatic Solvents _____ 1
- Aliphatic Solvents _____ 1
- Chlorinated Solvents _____ 1
- Weak Bases _____ 1
- Salts _____ 1
- Strong Bases _____ 2
- Salt Water 0-S-1926 _____ 1
- Hydraulic Fluid MIL-H-5606 _____ 1
- Lube Oil MIL-L-7808 _____ 1
- De-Icing Fluid MIL-A-8243 _____ 1
- Strong Acids _____ 5
- Strong Oxidants _____ 5
- Esters/Keytones _____ 1
- UV Light _____ 2
- Petroleum _____ 2
- Fungus ASTM G-21 _____ 2
- Halogen Free _____ Yes
- RoHS _____ Yes

Melt Point
ASTM D-2117
449°F (232°C)

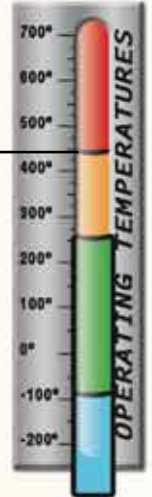

PHYSICAL PROPERTIES

- Monofilament Diameter _____ .005-.010
ASTM D-204
- Flammability Rating ____ Non Flammable
- Recommended Cutting _____ Shears
- Colors _____ 1
- Wall Thickness _____ .013-.025
- Specific Gravity ASTM D-792 _____ NA
- Moisture Absorption _____ NA
% ASTM D-570

Nominal Size	Part #	AWG of Ends	Carriers	Wires/Carrier	Current Capacity Amps
1/16"	MBN0.06SV	36	24	2	11
1/8"	MBN0.13SV	36	24	5	25
5/32"	MBN0.16SV	36	24	10	40
1/4"	MBN0.25SV	36	24	16	53
3/8"	MBN0.38SV	36	48	8	53
1/2"	MBN0.50SV	36	48	11	62
5/8"	MBN0.63SV	34	48	8	64
25/32"	MBN0.78SV	36	48	18	88
7/8"	MBN0.88SV	30	48	7	100
1"	MBN1.00SV	30	48	8	120
1 1/8"	MBN1.13SV	30	48	9	130
1 3/8"	MBN1.38SV	30	48	11	150
1 1/2"	MBN1.50SV	30	48	12	165
2 1/4"	MBN2.25SV	30	48	16	190
HEAVY DUTY CONSTRUCTION					
1/2"	MBH0.50SV	30	24	15	120
FLAT CONSTRUCTION					
1/8"	MFN0.13SV	36	24	3	16
3/16"	MFN0.19SV	36	24	5	25
1/4"	MFN0.25SV	36	24	10	40
3/8"	MFN0.38SV	36	48	6	40
5/8"	MFN0.63SV	36	48	8	53
3/4"	MFN0.75SV	36	48	18	85

www.techflex.com