

Glass Passivated Bridge Rectifiers

FEATURES

- UL Recognized File # E-326854
- Ideal for automated placement
- Reliable low cost construction utilizing molded plastic technique
- High surge current capability
- Moisture sensitivity level : level 1, per J-STD-020
- Compliant to RoHS Directive 2011/65/EU and in accordance to WEEE 2002/96/EC
- Halogen-free according to IEC 61249-2-21 definition



MBS



MECHANICAL DATA


Case : Molded plastic body

Molding compound, UL flammability classification rating 94V-0
Base P/N with suffix "G" on packing code - halogen-free, RoHS compliant

Terminal : Matte tin plated leads, solderable per JESD22-B102
Meet JESD 201 class 1A whisker test

Polarity : Polarity as marked on the body

Weight : 0.12 gram (approximately)

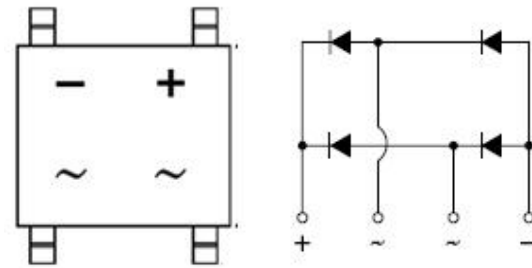

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)							
PARAMETER	SYMBOL	MBS2	MBS4	MBS6	MBS8	MBS10	Unit
Maximum repetitive peak reverse voltage	V _{RRM}	200	400	600	800	1000	V
Maximum RMS voltage	V _{RMS}	140	280	420	560	700	V
Maximum DC blocking voltage	V _{DC}	200	400	600	800	1000	V
Maximum average forward rectified current On glass-epoxy P.C.B. On aluminum substrate	I _{F(AV)}	0.5 0.8					A
Peak forward surge current, 8.3 ms single half sine-wave superimposed on rated load	I _{FSM}	35					A
Maximum instantaneous forward voltage (Note 1) I _F = 0.4 A	V _F	1.0					V
Maximum DC reverse current at rated DC blocking voltage	I _R	5 100					uA
Rating for fusing (t<8.3mS)	I ² T	5.08					A ² sec
Typical junction capacitance Per Leg (Note 2)	C _j	13					pF
Typical thermal resistance (Note 3) (Note 4) (Note 3)	R _{θjL} R _{θjA} R _{θjA}	20 70 85					°C/W
Operating junction temperature range	T _J	- 55 to + 150					°C
Storage temperature range	T _{STG}	- 55 to + 150					°C

Note 1: Pulse Test with PW=300 usec,1% Duty Cycle

Note 2: Measure at 1.0MHz and Applied Reverse Voltage of 4.0 Volts D.C.

Note 3: On glass epoxy P.C.B. mounted on 0.05" x 0.05" (1.3mm x 1.3mm) pads

Note 4: On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20mm x 20mm) mounted on 0.05" x 0.05" (1.3mm x 1.3mm) solder pads

ORDERING INFORMATION				
PART NO.	PACKING CODE	GREEN COMPOUND CODE	PACKAGE	PACKING
MBSx (Note 1)	RC	Suffix "G"	MBS	3000 / 13" Paper reel

Note 1: "x" defines voltage from 200V (MBS2) to 1000V (MBS10)

Note 2: For MBS: Packing code (Whole series with green compound)

EXAMPLE				
PREFERRED P/N	PART NO.	PACKING CODE	GREEN COMPOUND CODE	DESCRIPTION
MBS10 RCG	MBS10	RC	G	Green compound

RATINGS AND CHARACTERISTICS CURVES

(TA=25°C unless otherwise noted)

FIG.1 MAXIMUM FORWARD CURRENT DERATING CURVE

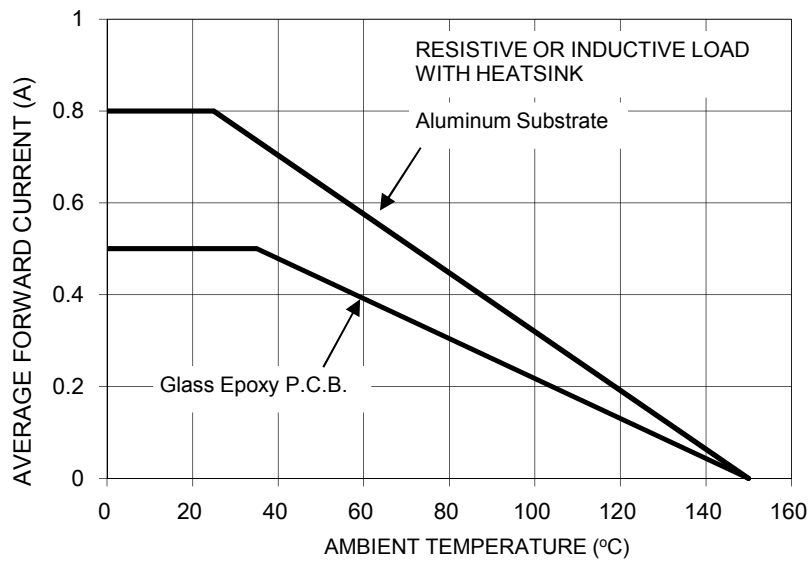


FIG. 2 TYPICAL REVERSE CHARACTERISTICS PER LEG

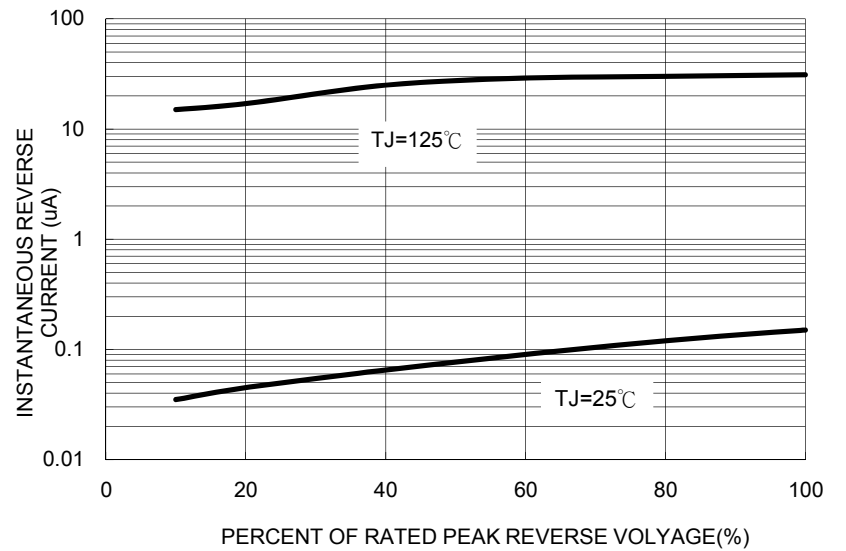


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT PER LEG

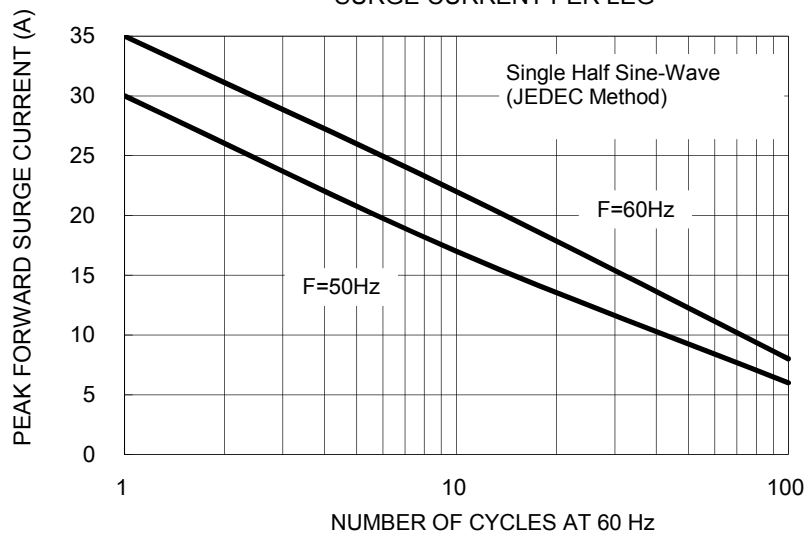


FIG. 4 TYPICAL FORWARD CHARACTERISTICS PER LEG



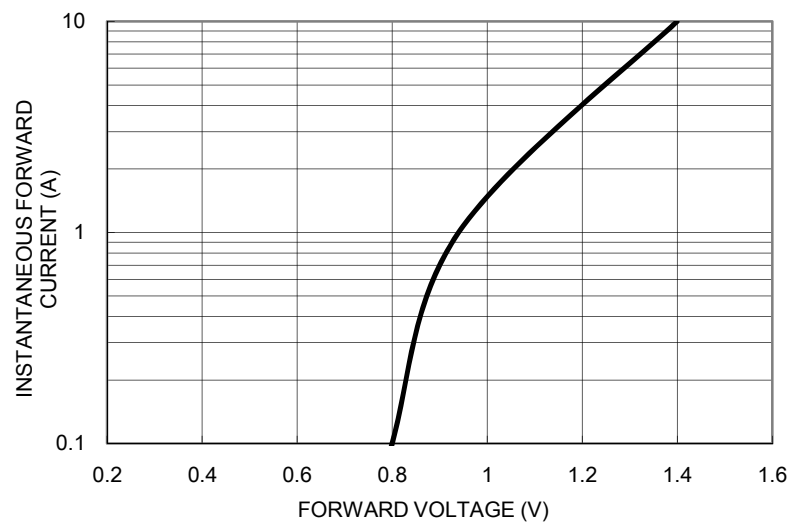


FIG. 5 TYPICAL JUNCTION CAPACITANCE PER LEG

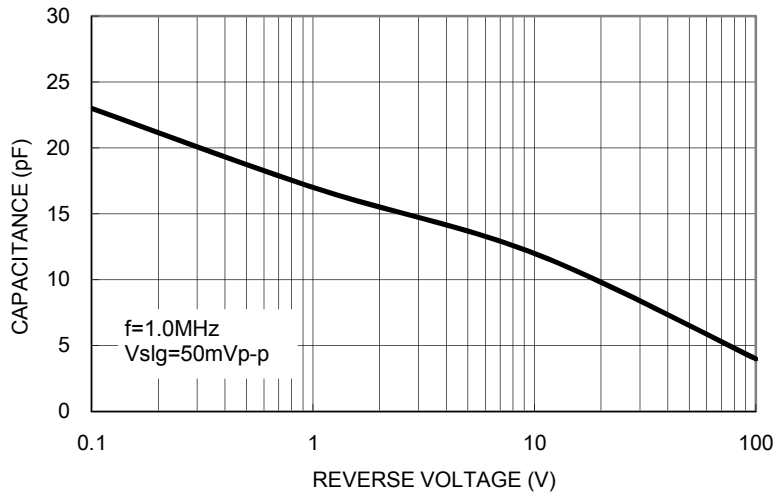


PACKAGE OUTLINE DIMENSIONS

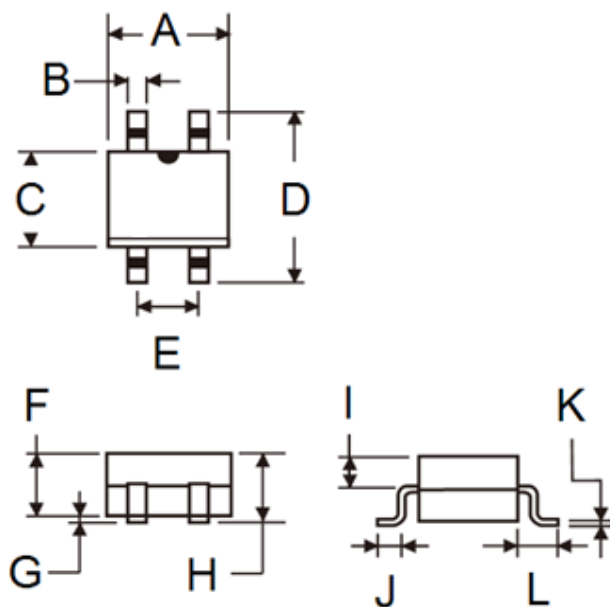

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	4.50	4.90	0.177	0.193
B	0.56	0.84	0.022	0.033
C	3.60	5.00	0.142	0.197
D	-	6.90	-	0.272
E	2.20	2.60	0.087	0.102
F	2.30	2.70	0.091	0.106
G	-	0.20	-	0.008
H	-	2.90	-	0.114
I	0.95	1.53	0.037	0.060
J	0.70	1.10	0.028	0.043
K	0.15	0.35	0.006	0.014
L	1.10	2.12	0.043	0.083

SUGGESTED PAD LAYOUT

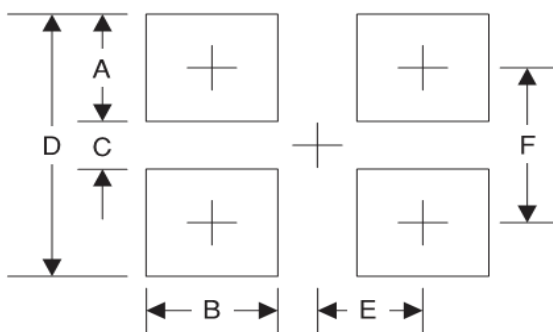

Symbol	Unit(mm)
A	1.7
B	0.9
C	4.4
D	8.1
E	1.3
F	6.3

MARKING DIAGRAM



P/N = Specific Device Code
 YW = Date Code
 F = Factory Code