



KEMET Part Number: MDC10475K100A54P3TUBE
(F153AA475K100T, MDC100DA7470KA54P3L3)



MDC, Film, Metallized Polyester, Dual-In-Line, 4.7 uF, 10%, 100 V, 63 V, 85C, 10mm

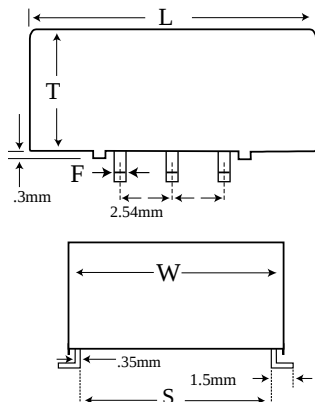

Dimensions

L	13.5mm +/-0.2mm
W	12.2mm +/-0.2mm
T	6.05mm +/-0.2mm
S	10mm +/-0.2mm
F	0.5mm +/-0.05mm

Packaging Specifications

Packaging:	Bulk, Tube
Packaging Quantity:	35

General Information

Supplier:	KEMET
Series:	MDC
Dielectric:	Metallized Polyester
Style:	Dual-In-Line
RoHS:	Yes
Lead:	L Leads

Specifications

Capacitance:	4.7 uF
Capacitance Tolerance:	10%
Voltage DC:	100 VDC
Voltage AC:	63 VAC
Temperature Range:	-55/+125C
Rated Temperature:	85C
Dissipation Factor:	0.8% 1kHz, 1.5% 10kHz
Insulation Resistance:	1.0638 GOhms
Inductance:	4 nH

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.



© 2006 - 2018 IntelliData.net