
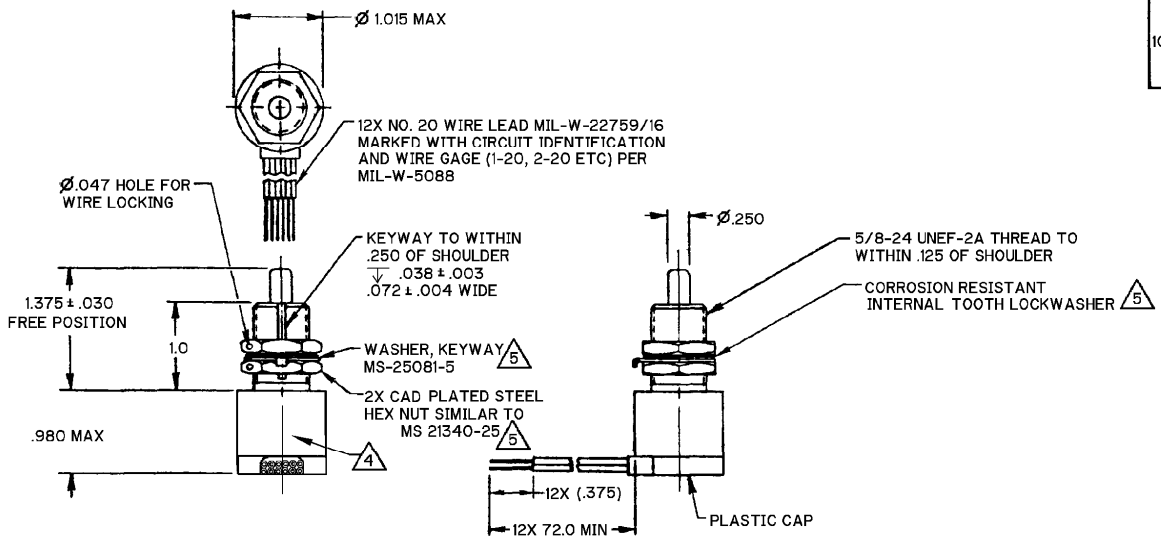


**MICRO SWITCH**  
a Honeywell Division

**SWITCH-ENCLOSED**

CATALOG LISTING  
**ML-1008**

FED. MFG. CODE 81929



ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

THIRD ANGLE PROJECTION

CHARACTERISTICS	ELECTRICAL DATA		SCALE
OPERATING FORCE - - - - - 6-12 LBS	CONTACT ARRANGEMENT		FULL
FULL OVERTRAVEL FORCE - - - - - 30 LBS MAX	4X 3PDT		
RELEASE FORCE - - - - - 4 LBS MIN	DO NOT SCALE PRINT		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
PRETRAVEL - - - - - .070 MAX	28 VDC		
DIFFERENTIAL TRAVEL - - - - - .020 MAX	LOAD	ONE PLACE 1.01 ± .030	
OVERTRAVEL - - - - - .250 MIN	SEA LEVEL	TWO PLACE 1.001 ± .015	
	50,000 FT	THREE PLACE 1.0001 ± .005	
	RES	7	ANGLES ±
	IND	4	WEIGHT
	MOTOR	4	

**NOTES**

- 1 - COINCIDENCE OF OPERATING AND RELEASING POINTS: .010 OF PLUNGER TRAVEL
- 2 - CORROSION RESISTANT STEEL ENCLOSURE
- 3 - SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3
- △ CIRCUIT DIAGRAM, CATALOG LISTING, DATE CODE AND FED. MFG. CODE ARE SHOWN ON NAMEPLATE
- △ HARDWARE MAY BE PACKAGED UNASSEMBLED PER MIL-PRF-8805

CATALOG LISTING  
**ML-1008**  
 ISSUE 1  
 M  
 PAGE 1 OF 1  
 REVISIONS  
 CHECK  
 19 AUG 99  
 CHECK  
 19 AUG 99  
 CHECK  
 J A F  
 DRAWN  
 G J W  
 19 AUG 99  
 FORMTEK