



# P-DUKE POWER


## MPU01 Series

DC-DC Converter  
Up to 1 Watts

**5**  
YEARS  
WARRANTY

ROHS  
COMPLIANT

REACH  
COMPLIANT

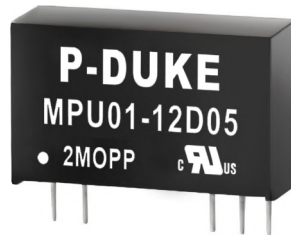

Medical



PV



Automation



Datacom



IPC



Industry



Measurement



Telecom



Automobile



Boat



Charger



Railway



<b>2</b> x MOPP	<b>LOW</b> Leakage Current	<b>5000</b> VAC Reinforced Insulation	Operating Altitude <b>5000</b> meter	<b>HIGH</b> Efficiency	<b>SCP</b>
-----------------------	----------------------------------	--	---	---------------------------	------------

### PART NUMBER STRUCTURE

MPU01 -	05	S	05
Series Name	Input Voltage (VDC)	Output Quantity	Output Voltage (VDC)
	05: 4.5~5.5 12: 9.6~14.4 15: 12.0~18.0 24: 19.2~28.8	S: Single  D: Dual	3P3: 3.3 05: 5 12: 12 15: 15  05: ± 5 12: ±12 15: ±15

**TECHNICAL SPECIFICATION** All specifications are typical at nominal input, full load and 25°C unless otherwise noted

Model Number	Input Range	Output Voltage	Output Current @Full Load	Input Current @ No Load	Efficiency	Maximum Capacitor Load
	VDC	VDC	mA	mA	%	μF
MPU01-05S3P3	4.5 ~ 5.5	3.3	303	30	80	2000
MPU01-05S05	4.5 ~ 5.5	5	200	30	82	820
MPU01-05S12	4.5 ~ 5.5	12	83	30	85	470
MPU01-05S15	4.5 ~ 5.5	15	67	30	84	470
MPU01-05D05	4.5 ~ 5.5	±5	±100	30	85	±470
MPU01-05D12	4.5 ~ 5.5	±12	±42	30	85	±220
MPU01-05D15	4.5 ~ 5.5	±15	±34	30	84	±220
MPU01-12S3P3	9.6 ~ 14.4	3.3	303	30	80	2000
MPU01-12S05	9.6 ~ 14.4	5	200	30	82	820
MPU01-12S12	9.6 ~ 14.4	12	83	30	84	470
MPU01-12S15	9.6 ~ 14.4	15	67	30	83	470
MPU01-12D05	9.6 ~ 14.4	±5	±100	30	82	±470
MPU01-12D12	9.6 ~ 14.4	±12	±42	30	83	±220
MPU01-12D15	9.6 ~ 14.4	±15	±34	30	83	±220
MPU01-15S3P3	12 ~ 18	3.3	303	15	79	2000
MPU01-15S05	12 ~ 18	5	200	15	83	820
MPU01-15S12	12 ~ 18	12	83	15	84	470
MPU01-15S15	12 ~ 18	15	67	15	84	470
MPU01-15D05	12 ~ 18	±5	±100	15	82	±470
MPU01-15D12	12 ~ 18	±12	±42	15	83	±220
MPU01-15D15	12 ~ 18	±15	±34	15	83	±220
MPU01-24S3P3	19.2 ~ 28.8	3.3	303	10	78	2000
MPU01-24S05	19.2 ~ 28.8	5	200	10	82	820
MPU01-24S12	19.2 ~ 28.8	12	83	10	83	470
MPU01-24S15	19.2 ~ 28.8	15	67	10	83	470
MPU01-24D05	19.2 ~ 28.8	±5	±100	10	80	±470
MPU01-24D12	19.2 ~ 28.8	±12	±42	10	81	±220
MPU01-24D15	19.2 ~ 28.8	±15	±34	10	81	±220

**INPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating input voltage range	5Vin(nom)	4.5	5	5.5	VDC
	12Vin(nom)	9.6	12	14.4	
	15Vin(nom)	12	15	18	
	24Vin(nom)	19.2	24	28.8	
Input surge voltage	5Vin(nom)			6	VDC
	12Vin(nom)			25	
	15Vin(nom)			25	
	24Vin(nom)			40	
*Only for 5Vin items If the input will be switched electromechanically, the input should install an external 100μF/10V E/C. to avoid voltage transient.					

**OUTPUT SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Voltage accuracy	Measured by nominal input & 60% FL Measured by nominal input & 90% FL	3.3Vout,5Vout,±5Vout Others	-3.5		+3.5 %
Line regulation	Measured by each 1% of Vin			0.2	%
Load regulation	10% Load to 100% Load	3.3Vout,5Vout,±5Vout Others		10 7	%
Minimum Load	Reference Characteristic Curve	0			%
Cross regulation	Asymmetrical load 25%/100% FL	Dual	±4		%
Ripple and noise	Measured by 20MHz bandwidth		75	100	mVp-p
Temperature coefficient		-0.03		+0.03	%/°C
Short circuit protection		Continuous, automatics recovery			

**GENERAL SPECIFICATIONS**

Parameter	Conditions	Min.	Typ.	Max.	Unit
Isolation voltage	1 minute Input to Output	5000			VAC
Isolation resistance	500VDC	10			GΩ
Isolation capacitance			15	20	pF
Leakage current	240VAC,60Hz			2	μA
Switching frequency		220		380	kHz
Clearance/Creepage		8.0			mm
Safety approvals	IEC/ EN/ ANSI/AAMI ES 60601-1 IEC/ EN/ UL 62368-1			UL:E360199 UL:E193009 CB:UL(Demko)	
Case material				Non-conductive black plastic	
Base material				None	
Potting material				Silicone (UL94 V-0)	
Weight				4.8g (0.17oz)	
MTBF	MIL-HDBK-217F, Full load			1.936 x 10 <sup>7</sup> hrs	

**ENVIRONMENTAL SPECIFICATIONS**


Parameter	Conditions	Min.	Typ.	Max.	Unit
Operating ambient temperature	Without derating	-40		+95	°C
Maximum case temperature				105	°C
Storage temperature range		-55		+125	°C
Operating altitude				5000	m
Thermal shock				MIL-STD-810F	
Shock				MIL-STD-810F	
Vibration				MIL-STD-810F	
Relative humidity				5% to 95% RH	

## EMC SPECIFICATIONS


Parameter	Conditions	Level
EMI	EN55011, EN55032, EN60601-1-2 With external components	Class A, Class B
EMS	EN55024 and EN60601-1-2	Perf. Criteria A
ESD	EN61000-4-2 Air $\pm 15\text{kV}$ and Contact $\pm 8\text{kV}$	Perf. Criteria A
Radiated immunity	EN61000-4-3 10 V/m	Perf. Criteria A
Fast transient	EN61000-4-4 $\pm 2\text{kV}$ External input filter circuit is required, for further information, please contact P-DUKE.	Perf. Criteria A
Surge	EN61000-4-5 $\pm 2\text{kV}$ External input filter circuit is required, for further information, please contact P-DUKE.	Perf. Criteria A
Conducted immunity	EN61000-4-6 10 Vr.m.s	Perf. Criteria A
Power frequency magnetic field	EN61000-4-8 100A/m continuous; 1000A/m 1 second	Perf. Criteria A

**CAUTION:** This power module is not internally fused. An input line fuse must always be used.


## CHARACTERISTIC CURVE

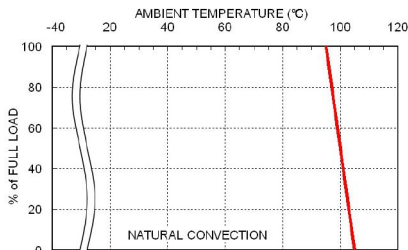


MPU01-24S05 Derating Curve

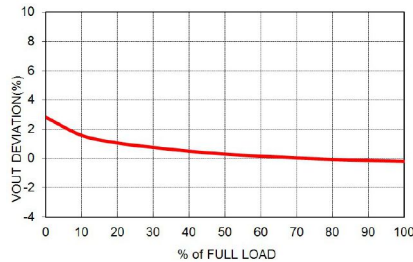

MPU01-24S05 Vout Deviation vs. Output Load

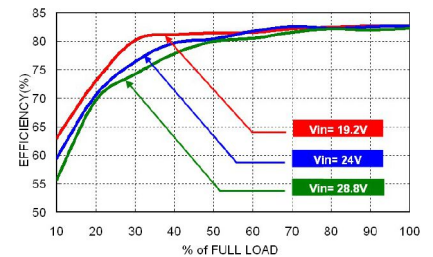

MPU01-24S05 Efficiency vs. Output Load

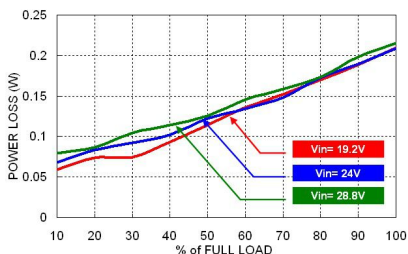

MPU01-24S05 Power Dissipation vs. Output Load

## FUSE CONSIDERATION

This power module is not internally fused. An input line fuse must always be used.

This encapsulated power module can be used in a wide variety of applications, ranging from simple stand-alone operation to an integrated part of sophisticated power architecture.


To maximum flexibility, internal fusing is not included; however, to achieve maximum safety and system protection, always use an input line fuse.

The input line fuse suggest as below :

Modules	Fuse Rating (A)	Fuse Type
MPU01-05S□□、MPU01-05D□□	0.5	Slow-Blow
MPU01-12S□□、MPU01-12D□□	0.315	Slow-Blow
MPU01-15S□□、MPU01-15D□□	0.315	Slow-Blow
MPU01-24S□□、MPU01-24D□□	0.16	Slow-Blow

The table based on the information provided in this data sheet on inrush energy and maximum DC input current at low Vin..

## MECHANICAL DRAWING

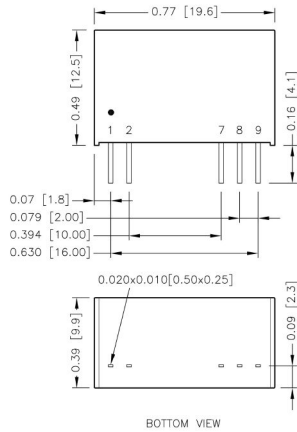


### PIN CONNECTION

PIN	SINGLE	DUAL
1	+Vin	+Vin
2	-Vin	-Vin
7	-Vout	-Vout
8	No pin	Common
9	+Vout	+Vout

- All dimensions in inch [mm]
- Tolerance :x.xx±0.02 [x.xx±0.5]  
x.xxx±0.01 [x.xx±0.25]
- Pin dimension tolerance ±0.004[0.10]

## RECOMMENDED PAD LAYOUT

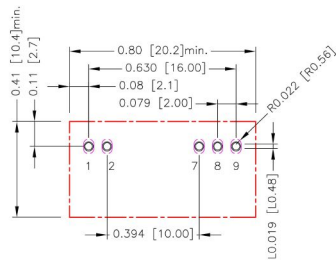


All dimensions in inch[mm]  
 Pad size(lead free recommended)  
 Through hole 1.2.7.8.9:  $\varnothing 0.031[0.80]$   
 Top view pad 1.2.7.8.9:  $\varnothing 0.039[1.00]$   
 Bottom view pad 1.2.7.8.9:  
 Groove R0.022[0.56] L0.019[0.48]

- \* There should be at least 8mm distance between primary and secondary circuit.
- \*\* For further information, please contact P-DUKE.

## THERMAL CONSIDERATIONS

The power module operates in a variety of thermal environments. However, sufficient cooling should be provided to help ensure reliable operation of the unit. Heat is removed by conduction, convection, and radiation to the surrounding environment. Proper cooling can be verified by measuring the point as the figure below. The temperature at this location should not exceed "Maximum case temperature". When operating, adequate cooling must be provided to maintain the test point temperature at or below "Maximum case temperature". You can limit this temperature to a lower value for extremely high reliability.

- Thermal test condition with vertical direction by natural convection (20LFM).



TOP VIEW