

All of our backlighted knobs can be manufactured for night vision use.
Our knobs meet NVIS "Green A" requirements.

Fig. 2


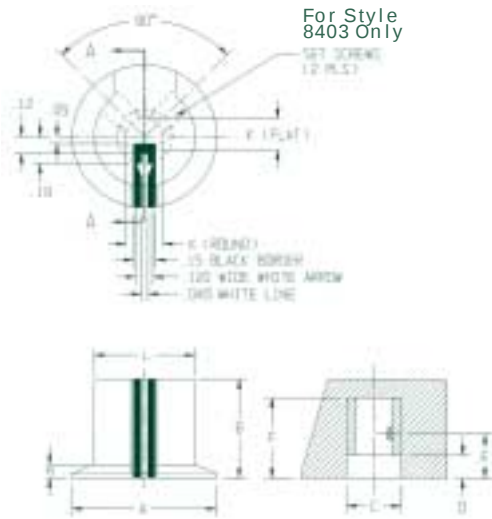


Fig. 5



1502

Fig.1

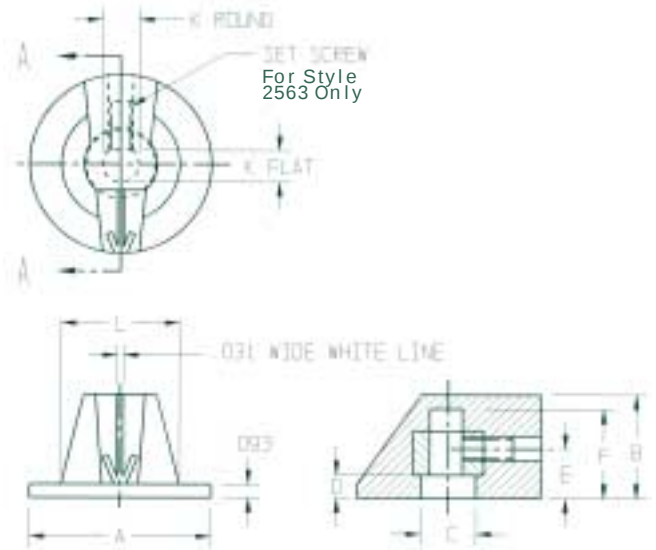

8403
MS21383
Fig.2



2562
MS25165
Fig.3



2485
Fig. 4



2563
MS25166
Fig.5

FPB Series

Style Number	A Base Diameter	B Height	C Nut Clearance Diameter		D Nut Clearance Depth		E Screw Height	F Shaft Hole Depth	L	Set Screws	
			1/8	1/4	1/8	1/4				1/8	1/4
1502	—	0.73	0.62	0.62	0.09	0.09	0.34	0.60	0.82	MS51021-102	MS51021-132
8403	1.00	0.69	0.38	0.38	0.16	0.16	0.31	0.56	0.70	MS51021-102	MS51021-132
2562	1.25	0.72	0.38	0.38	0.16	0.16	0.31	0.62	—	MS51021-102	MS51021-132
2485	1.25	0.72	0.38	0.38	0.16	0.16	0.31	0.62	—	MS51021-102	MS51021-132
2563	1.50	0.84	0.72	0.72	0.25	0.25	0.37	0.59	—	MS51021-102	MS51021-132

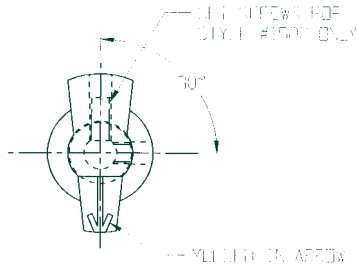


Fig.1

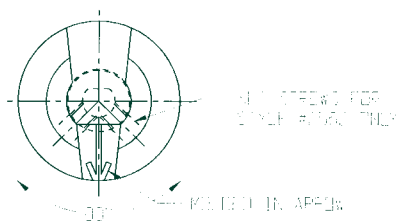


Fig. 3



Fig. 4

Design Variations

- Set screw locations can vary
- Markings and color can vary (see page 4)
- Nut clearance depth and diameter can vary
- See part number system for shaft hole designation

Detailed drawings are available for each style

