

MT-LWA-1/32-X-SP ✓ ACTIVE

RAYCHEM | RAYCHEM MT-LWA

TE Internal #: CP5066-000

Clear, 2:1, Single Wall Tubing, Medical Grade Crosslinked Polyolefin, Non-Flame-Retardant, Cut Piece / Stick / Spool, -40 – 110 °C, RAYCHEM MT-LWA

[View on TE.com >](#)



Heat Shrink Tubing



Primary Product Color: **Clear**

Wall Type: **Single Wall**

Shrink Ratio: **2:1**

Primary Product Material: **Medical Grade Crosslinked Polyolefin**

Tubing Flammability Type: **Non-Flame-Retardant**

Features

Product Type Features

Wall Type	Single Wall
-----------	-------------

Electrical Characteristics

Operating Voltage (Max)	1 kV
-------------------------	------

Body Features

Fluid Type	Medical Fluids, Water
Primary Product Color	Clear
Shrink Ratio	2:1
Primary Product Material	Medical Grade Crosslinked Polyolefin
Flexibility	Flexible

Dimensions

Recovered Wall Thickness (Nominal)	.25 mm[.01 in]
------------------------------------	----------------

Usage Conditions

Shrink Temperature (Min)	110 °C
Tubing Flammability Type	Non-Flame-Retardant
Operating Temperature Range	-40 – 110 °C
Recovery Temperature	110 °C

Operation/Application



Mechanical Resistance	Fluids, Impact, Radiation Sterilization, Strain Relief
-----------------------	--

Product Availability

Applicable Region	Global
-------------------	--------

Packaging Features

Packaging Method	Cut Piece, Spool, Stick
------------------	-------------------------

Other

Product Source	US
----------------	----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
------------------------------	-----------

EU ELV Directive 2000/53/EC	Compliant
-----------------------------	-----------

China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
---	---

EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JAN 2024 (240) Does not contain REACH SVHC
--	--

Halogen Content	Low Halogen - Br, Cl, F, I < 900 ppm per homogenous material. Also BFR/CFR/PVC Free
-----------------	---

Solder Process Capability	Not applicable for solder process capability
---------------------------	--


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>


Compatible Parts



Also in the Series | RAYCHEM MT-LWA

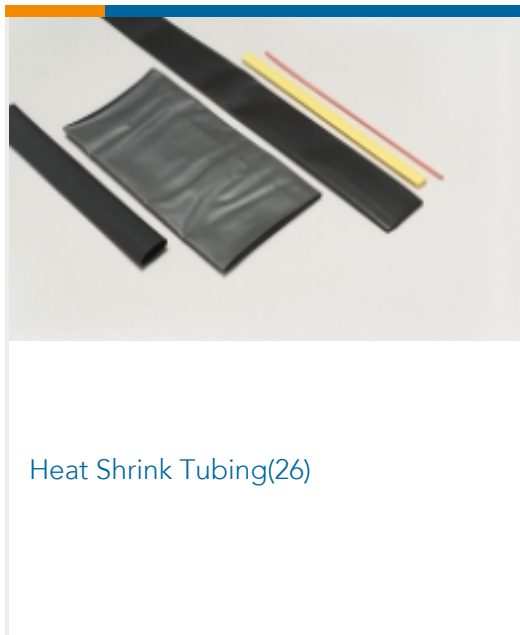

Customers Also Bought

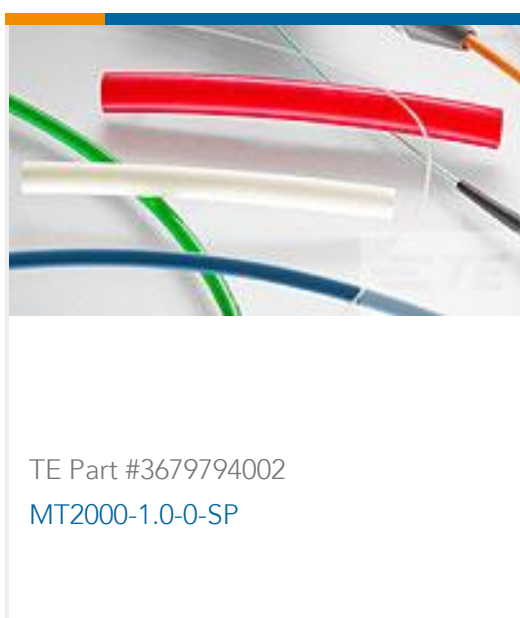

MT-LWA-1/32-X-SP

Clear, 2:1, Single Wall Tubing, Medical Grade Crosslinked Polyolefin, Non-Flame-Retardant, Cut Piece / Stick / Spool, -40 – 110 °C, RAYCHEM MT-LWA

