

MTCA-085-02-S-DV-SMT-K-TR

MTCA SERIES

(0.75 mm) .030"

MICRO TCA CONNECTOR

SPECIFICATIONS

For complete specifications see www.samtec.com?MTCA

Insulator Material:

LCP

Terminal Material:

Brass Alloy

Plating:

Au or Sn over

50 μ" (1.27 μm) Ni

Operating Temp Range:


-55 °C to +125 °C

RECOGNITIONS

For complete scope of recognitions see www.samtec.com/quality




Mates with:
(1.60 mm) .062" thick cards

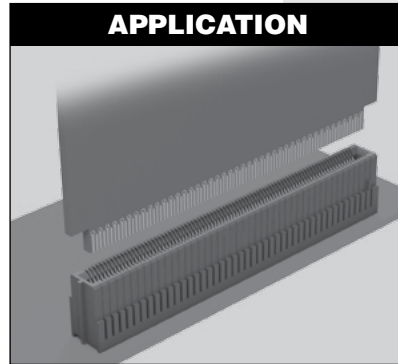

APPLICATION

Contacts on
(0.75 mm)
.030" pitch



Supports hot plugging
and high-speed
serial connections

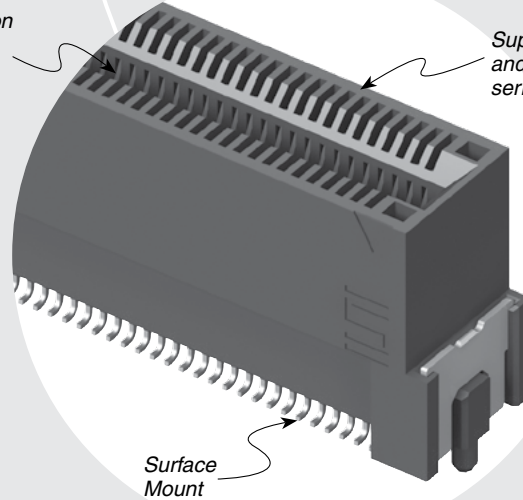

Surface
Mount

ALSO AVAILABLE (MOQ Required)

- Additional positions
Contact Samtec.

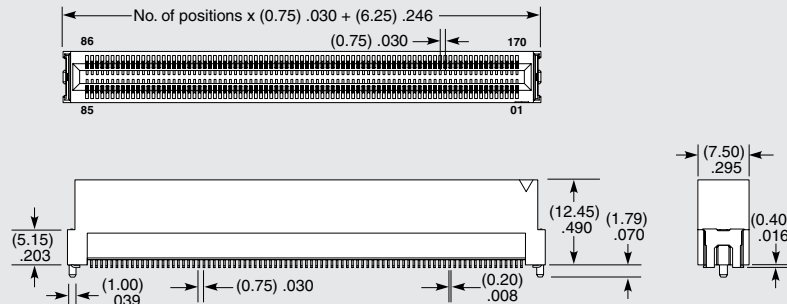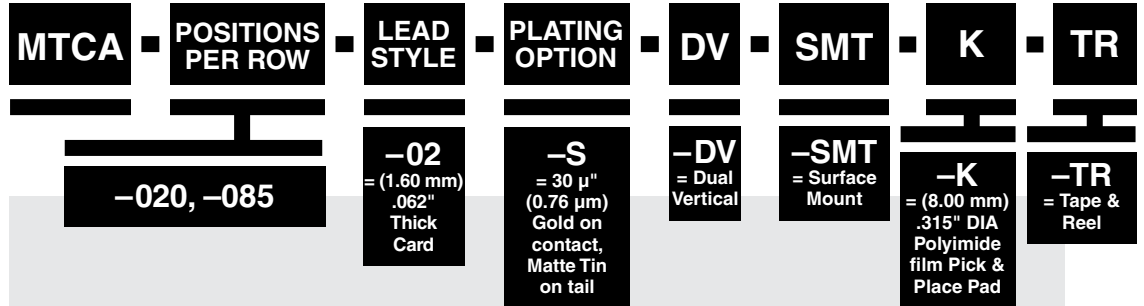

Note:
Some lengths, styles and options are non-standard, non-returnable.

Due to technical progress, all designs, specifications and components are subject to change without notice.

WWW.SAMTEC.COM

All parts within this catalog are built to Samtec's specifications.
Customer specific requirements must be approved by Samtec and identified in a Samtec customer-specific drawing to apply.