



Heat Shrink Tubing > RT-375 Heat Shrink Tubing



Primary Product Color: **Clear**

Wall Type: **Single Wall**

Expanded Inside Diameter (Min): **2.36 mm [.093 in]**

Recovered Inside Diameter (Max): **1.17 mm [.046 in]**

Shrink Ratio: **2:1**

[All RT-375 Heat Shrink Tubing \(31\)](#)

## Features

### Product Type Features

Wall Type	Single Wall
-----------	-------------

### Electrical Characteristics

Operating Voltage (Max)	.6 kV
-------------------------	-------

### Body Features

Fluid Type	Aviation Fuel, Hydraulic Fluid, Lubricating Oil, Water
Primary Product Color	Clear
Shrink Ratio	2:1
Primary Product Material	Crosslinked Fluoropolymer
Flexibility	Flexible

### Dimensions

Recovered Wall Thickness (Tolerance)	.1 mm[.004 in]
Recovered Wall Thickness (Nominal)	.25 mm[.01 in]
Product Length	1220 mm[48.031 in]
Expanded Inside Diameter (Min)	2.36 mm[.093 in]
Recovered Inside Diameter (Max)	1.17 mm[.046 in]



Tubing Size Range	1.17 – 2.36 mm [.046 – .093 in]
-------------------	---------------------------------

### Usage Conditions

Shrink Temperature (Min)	125 °C
Tubing Flammability Type	Highly Flame-Retardant
Operating Temperature Range	-55 – 150 °C
Recovery Temperature	150 °C

### Operation/Application

Mechanical Resistance	Abrasion, Fluids, Mechanical Damage, Strain Relief
-----------------------	--

### Product Availability

Applicable Region	Global
-------------------	--------

### Packaging Features

Packaging Method	Stick
------------------	-------

### Other

Meets Low Outgassing Requirements	No
Product Source	Czech Republic

### Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

#### Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these



limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

## Compatible Parts




TE Part # CAT-HST-RT375  
RT-375 Heat Shrink Tubing




TE Part # NB17584001  
RT-375-3/4-X-SP

## Also in the Series | RAYCHEM RT-375

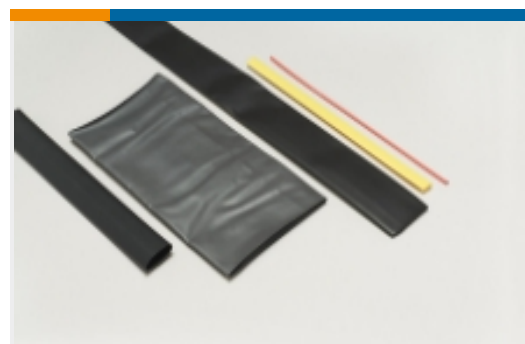

Heat Shrink Tubing(32)

## Customers Also Bought

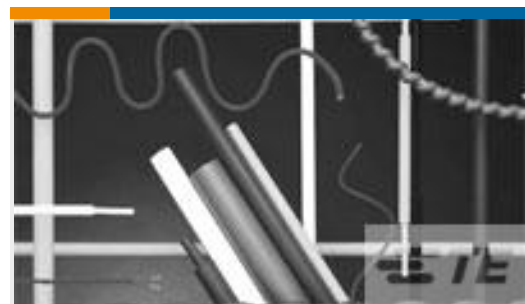

TE Part #5038114002  
DCPT-12/6-45-SP



TE Part #CU7128-000  
WCSM-34/8-1000/S(S10)



TE Part #NB15932001  
RT-375 Heat Shrink Tubing

## Documents

### Product Drawings

[RT-375-3/32-X-STK](#)

English

### Datasheets & Catalog Pages

[RT-375 Tubing](#)

NB16072001

Clear, 2:1, Single Wall Tubing, Shrinks To 1.17 mm [.046 in], Crosslinked Fluoropolymer, 2.36 mm [.093 in] Inner Diameter, RAYCHEM RT-375



English

---

[Product Specifications](#)

[Application Specification](#)

English