

16

NEK/J 210

Power supply connectors




Power supply cable socket, straight version, with solder eyes and bend protection

State: Active

16

NEK/J 210

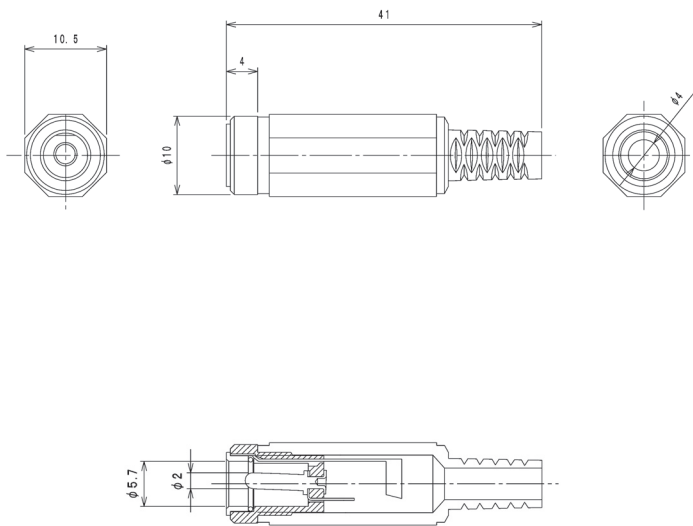

Environmental conditions

Temperature range -20 °C/+70 °C

Materials

Insulating body	PA, V-2 according to UL94
Contact	CuZn, nickel-plated
Housing	PE

Mechanical data

Diameter opening	5,7 mm
Diameter center pin	2,0 mm
Mating cycles	≥ 5000 ¹
Insertion force	4–20 N (initial value)
Withdrawal force	2–15 N (initial value)

¹ measured with a gauge plug

Connectable conductors for solder area

Cable diameter 4 mm

Electrical data (at T_{amb} 20 °C)

Contact resistance	≤ 30 mΩ
Rated current	2 A
Rated voltage	24 V DC
Rated impulse voltage	500 V/60 s
Insulation resistance	≥ 100 MΩ

Associated products

Counterparts		
☞ 1633 02	☞ 1633 03	☞ NES/J 21
☞ NES/J 21 W	☞ NES/J 210	☞ XNES/J 210

16

NEK/J 210

Designation	Pole Number	PU (Pieces)	MDQ (Pieces)
NEK/J 210	2	100	500

Packaging:

in bulk, in a cardboard box or a plastic bag