

PRODUCTS

Chilisin provides inductor turnkey solutions for Power, EMI and RF and global technical team to support its customers. Chilisin has become one of the few inductor suppliers capable of providing a complete "one-stop shopping" experience.




▶ ACTR_2010

Home > Products > Resistor & Current Sensor > ACTR_2010

Note: Please be sure to request approval specifications that provide further details of the products. Kindly note that the content of these specifications are subject to change or may be discontinued without prior notice. This product may not be designed/used in medical or high risk applications without Chilisin approval. Please contact our sales department before ordering.





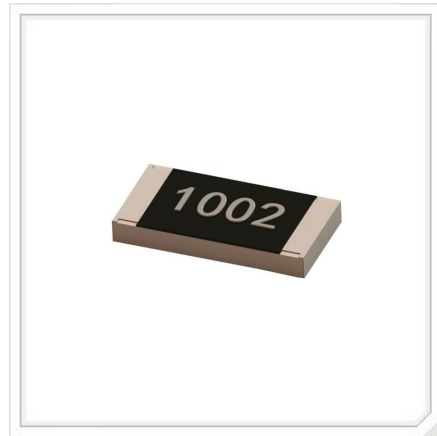




- Power Inductor
- EMI Suppression Filters
- Chip Inductor
- Resistor & Current Sensor

Product Search



Part Number : NL201614T-1R8□-N

Status	MP ?
Structure	Wire Wound
Size Code(JIS/EIA)	2016/0805
Inductance	1.8
Unit	uH
Tolerance(±%)	10,5
Test Frequency(L)	7.96MHz
Q Min	15
Test Frequency(Q)	7.96MHz
SRF(MHz)Min	80
RDC(Ω)Max	1.2
IDC(mA)	270
Operating Temperature	-25°C~105°C(Including self - temperature rise)
L(mm)	2.4Max.
W(mm)	1.72Max.
T(mm)	1.52Max.

P/N	NL201614T-1R8J-N
Part Numbering	
Dimensions	
Reflow Profile	
Packing	  
Recommended Pattern	
Electrical Characteristics Curve	 

About Chilisin

- > Media Center
- > Corporate Overview
- > Corporate Milestones
- > Core Technology
- > Certificates & Awards
- > Quality and Social Responsibility
- > Announcement
- > Video
- > Site Map

Investor Relations

- > News
- > Financial Information
- > Corporate Shareholders Area
- > Corporate Governance

Careers

- > Join Chilisin
- > Work life in Chilisin
- > Learning Career Development
- > Welfare System



Tel: +886-3-5992646

Fax: +886-3-5999176

Address: No.29, Lane 301,
Tehhsin Rd., Hosin, Hukou,
Hsinchu 303, Taiwan (R.O.C.)

✉ sales@chilisin.com