




.079" [2.00 mm] Contact Centers, Male Headers, Straight/Right Angle/SMT

SPECIFICATIONS

- 2 Amps current rating
- UL Flammability Rating: 94V-0
- Insulator Material: Nylon
- Contact Material: Brass
- Stacker Options available - Consult Factory



JUMPERS

PART NUMBER:
 SPN02SYBN-RC (GOLD FLASH)
 STN02SYBN-RC (TIN PLATE)

READOUT

SINGLE (1) **DUAL (2)** **QUAD (4)**

TERMINATION TYPE

STRAIGHT **RIGHT ANGLE** **SMT**

P/N CODE	ROWS	TERM	HEAD	TAIL	P/N CODE	ROWS	TERM	HEAD	TAIL	P/N CODE	ROWS	TERM	HEAD	TAIL
PAE	1	STRAIGHT	.142" [3.60]	.110" [2.80]	PAR	1	RIGHT ANGLE	.142" [3.60]	.110" [2.80]					
PAE	2	STRAIGHT	.142" [3.60]	.110" [2.80]	PAR	2	RIGHT ANGLE	.142" [3.60]	.110" [2.80]	MAM	2	SMT	.142" [3.60]	.256" [6.50]
RCC	4	STRAIGHT	.173" [4.40]	.094" [2.40]										

MOUNTING STYLE

Straight or Right Angle (N) **Dual Row SMT, Without Guide Posts (S)** **Dual Row SMT, With Guide Posts (P)**

Sullins Headers



.079" [2.00 mm] Contact Centers, Male Headers, Straight/Right Angle/SMT

PART NUMBER OPTIONS

INSULATOR MATERIAL
N = Nylon

CONTACTS
R = Brass

CONTACT FINISH - RoHS Compliant
P = Gold Flash Overall

CONTACT CENTERS
N = .079" [2.00 mm]

NUMBER OF POSITIONS
Positions Available Termination
2 Thru 40 = MAM, PAE, PAR
3 Thru 30 = RCC

RoHS COMPLIANT
Consult Factory For Modifications

MOUNTING STYLE
N = No Mounting
P = Surface Mount with Guide Posts (Dual Row)
S = Surface Mount without Guide Posts (Dual Row)





TERMINATION TYPE
MAM, PAE, PAR, RCC

NUMBER OF ROWS
1 = One row
2 = Two rows
4 = Four rows

Part Number Example: N R P N 40 1 PAE N -RC

DIMENSIONS

Dimensions in [] are in millimeters, all others are in inches.

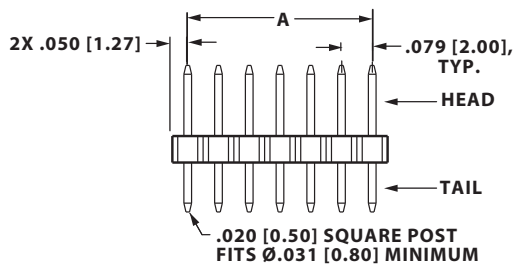

PART NUMBER	NUMBER OF CONTACTS SINGLE/DUAL/QUAD	DIMENSION A		DIMENSION B	
		in	mm	in	mm
NRPN02	-RC 02/04	0.079	2.00	0.157	4.00
NRPN03	-RC 03/06/12	0.157	4.00	0.236	6.00
NRPN04	-RC 04/08/16	0.236	6.00	0.315	8.00
NRPN05	-RC 05/10/20	0.315	8.00	0.394	10.00
NRPN06	-RC 06/12/24	0.394	10.00	0.472	12.00
NRPN07	-RC 07/14/28	0.472	12.00	0.551	14.00
NRPN08	-RC 08/16/32	0.551	14.00	0.630	16.00
NRPN09	-RC 09/18/36	0.630	16.00	0.709	18.00
NRPN10	-RC 10/20/40	0.709	18.00	0.787	20.00
NRPN11	-RC 11/22/44	0.787	20.00	0.866	22.00
NRPN12	-RC 12/24/48	0.866	22.00	0.945	24.00
NRPN13	-RC 13/26/52	0.945	24.00	1.024	26.00
NRPN14	-RC 14/28/56	1.024	26.00	1.102	28.00
NRPN15	-RC 15/30/60	1.102	28.00	1.181	30.00
NRPN16	-RC 16/32/64	1.181	30.00	1.260	32.00
NRPN17	-RC 17/34/68	1.260	32.00	1.339	34.00
NRPN18	-RC 18/36/72	1.339	34.00	1.417	36.00
NRPN19	-RC 19/38/76	1.417	36.00	1.496	38.00
NRPN20	-RC 20/40/80	1.496	38.00	1.575	40.00
NRPN21	-RC 21/42/84	1.575	40.00	1.654	42.00
NRPN22	-RC 22/44/88	1.654	42.00	1.732	44.00
NRPN23	-RC 23/46/92	1.732	44.00	1.811	46.00
NRPN24	-RC 24/48/96	1.811	46.00	1.890	48.00
NRPN25	-RC 25/50/100	1.890	48.00	1.969	50.00
NRPN26	-RC 26/52/104	1.969	50.00	2.047	52.00
NRPN27	-RC 27/54/108	2.047	52.00	2.126	54.00
NRPN28	-RC 28/56/112	2.126	54.00	2.205	56.00
NRPN29	-RC 29/58/116	2.205	56.00	2.283	58.00
NRPN30	-RC 30/60/120	2.283	58.00	2.362	60.00
NRPN31	-RC 31/62	2.362	60.00	2.441	62.00
NRPN32	-RC 32/64	2.441	62.00	2.520	64.00
NRPN33	-RC 33/66	2.520	64.00	2.598	66.00
NRPN34	-RC 34/68	2.598	66.00	2.677	68.00
NRPN35	-RC 35/70	2.677	68.00	2.756	70.00
NRPN36	-RC 36/72	2.756	70.00	2.835	72.00
NRPN37	-RC 37/74	2.835	72.00	2.913	74.00
NRPN38	-RC 38/76	2.913	74.00	2.992	76.00
NRPN39	-RC 39/78	2.992	76.00	3.071	78.00
NRPN40	-RC 40/80	3.071	78.00	3.150	80.00

Sullins Headers