


OD9225 IP68 Series



DC Fan - 12, 24, 48V
92x25mm (3.62"x 1.0")

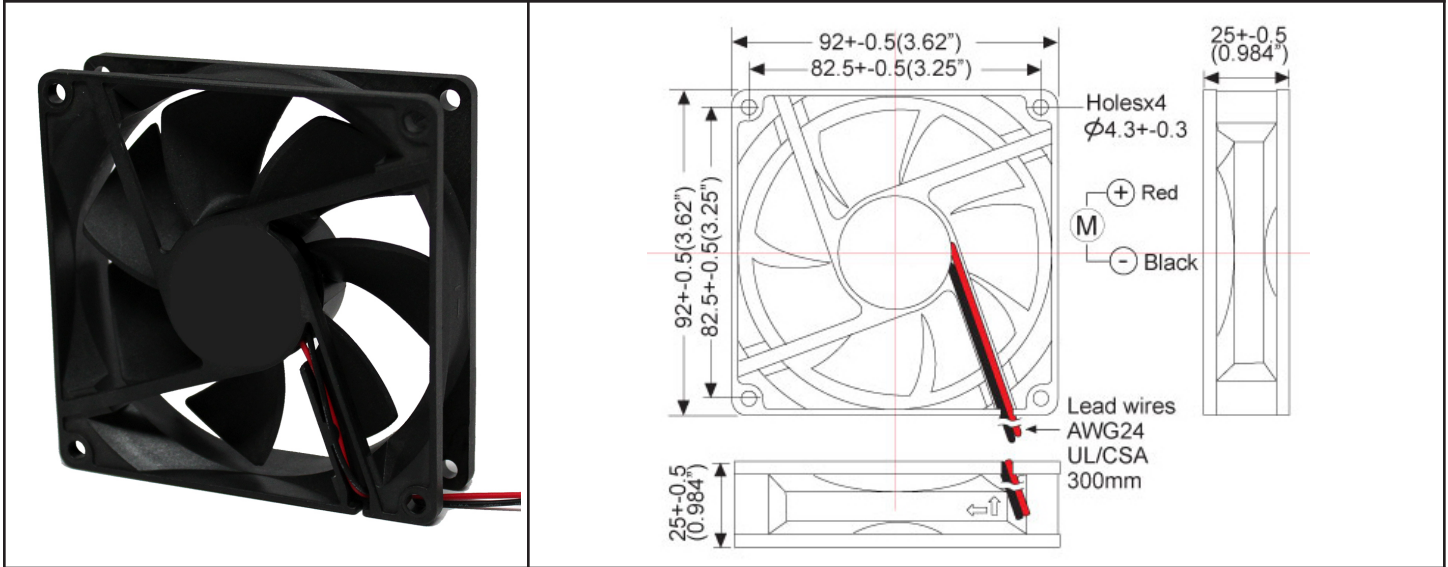

Frame & Impeller	PBT, UL94V-0 plastic	Available Options: Tachometer Alarm PWM 5V Available Life Expectancy (L10) Ball - 70,000 hrs (40C) Operating Temperature Ball: -15C ~ 65C Weight: ~ 0.21 lbs m0	
Connection	2x Lead wires 24AWG		
Motor	Brushless DC, auto restart, polarity protected, IP68		
Bearing System	Ball bearing		
Insulation Resistance	10M ohm between leadwire and frame (500 VDC)		
Dielectric Strength	1 minute at 500 VAC, max leakage < 500 μA		
Storage Temperature	-25C ~ +70C		

Model Number	Speed (RPM)	Airflow (CFM)	Noise (dB)	Volts DC	Input Power (Watts)	Amps	Max. Static Pressure ("H ₂ O)
OD9225-12HHBIP68	3300	60	38	12	3.0	0.29	0.25
OD9225-12HBIP68	2900	50	35	12	3.0	0.29	0.24
OD9225-12MBIP68	2500	35	30	12	2.1	0.20	0.18
OD9225-12LBIP68	1800	25	23	12	1.4	0.12	0.12
OD9225-24HHBIP68	3300	60	38	24	3.5	0.18	0.25
OD9225-24HBIP68	2900	50	33	24	3.5	0.18	0.24
OD9225-24MBIP68	2500	35	30	24	2.8	0.12	0.18
OD9225-24LBIP68	1800	25	23	24	2.4	0.10	0.12
OD9225-48HHBIP68	3300	60	38	48	4.3	0.09	0.25
OD9225-48HBIP68	2900	50	32	48	4.3	0.09	0.24
OD9225-48MBIP68	2500	35	30	48	2.4	0.05	0.18
OD9225-48LBIP68	2100	32	27	48	1.9	0.04	0.15