


PANR104450

Datasheet

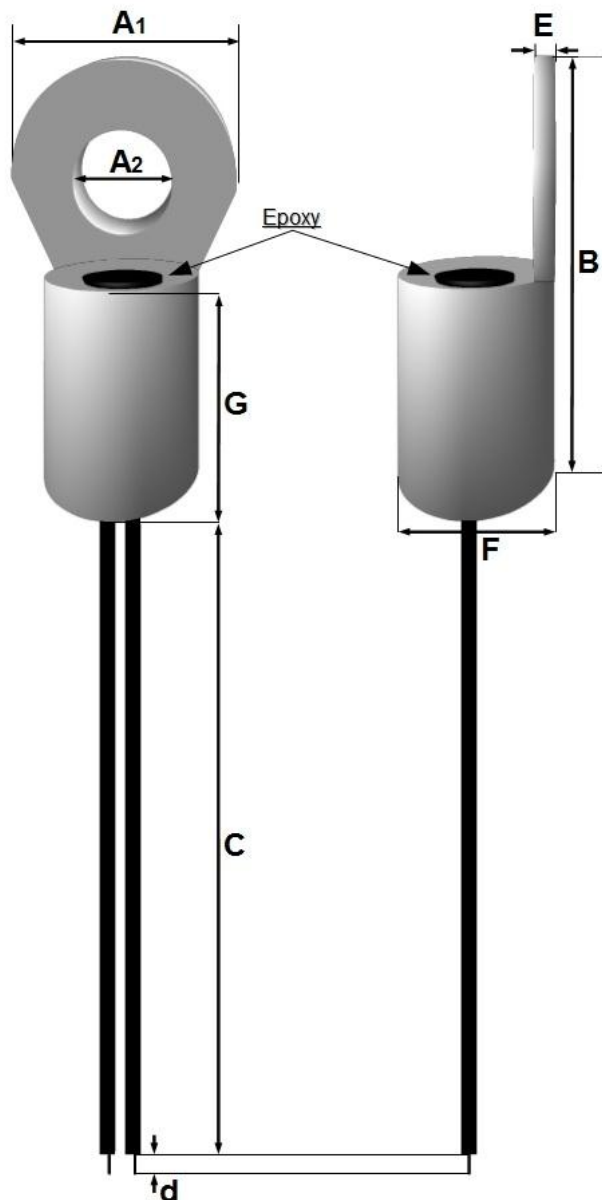

MECHANICAL SPECIFICATIONS			
Letter	Description	Dimensions (metric)	Dimensions (US)
A ₁	Outer Diameter of ring	9.5mm $\pm$ 0.1mm	0.375" $\pm$ 0.005"
A ₂	Inner Diameter of ring	3.7mm $\pm$ 0.1mm	0.145" $\pm$ 0.005"
B	Length of the part	18.2mm $\pm$ 0.2mm	0.720" $\pm$ 0.010"
C	Length of the leads	152.4mm $\pm$ 1.0mm	6.000" $\pm$ 0.050"
D	Stripped lead length	2.0mm $\pm$ 0.1mm	0.080" $\pm$ 0.005"
E	Thickness of ring	1.0mm $\pm$ 0.1mm	0.050" $\pm$ 0.005"
F	Thickness of barrel	5.5mm $\pm$ 0.1mm	0.216" $\pm$ 0.005"
G	Length of barrel	6.4mm $\pm$ 0.2mm	0.255" $\pm$ 0.005"
24AWG Teflon Wire			

ELECTRICAL SPECIFICATIONS	
Resistance at 25°C	100000 Ω $\pm$ 10%
Beta	4500K $\pm$ 2%
Temperature Coefficient of Resistance @ 25°C	-4.75% / °C
Operating Temperature Range	-50 °C – 150 °C
Dissipation Constant	3 mW/ °C
Thermal Time Constant	40 Seconds
Maximum Power	125 mW

Ametherm, Inc

961 Fairview Dr. Carson City,
NV 89701 Telephone:

800-808-2434 Fax: 702

884-0670

www.Ametherm.com