


Aluminum Electrolytic, 85C, PEH200, 0.01 F, 20%, 63 V, -40/+85C

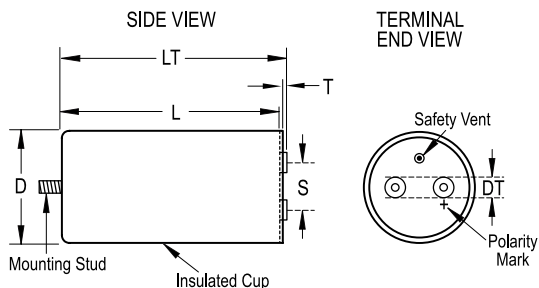

Dimensions	
D	36.6mm +/-1mm
L	94.5mm +/-1mm
T	4.4mm NOM
S	13mm +/-0.5mm
DT	8mm NOM
LT	101.9mm +/-1mm

Packaging Specifications	
Weight:	130 g
Sleeving:	Yes
Packaging:	Bulk
Packaging Quantity:	42

General Information	
Dielectric:	Aluminum Electrolytic
Series:	PEH200
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Notes:	Dimensions D And L Include Sleeving. MS = M8x12

Specifications	
Capacitance:	0.01 F
Capacitance Tolerance:	20%
Voltage DC:	63 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Life:	10000 Hrs (Rated Voltage And Ripple Current At 85C)
Resistance:	15 mOhms (100Hz 20C), 10 mOhms (100kHz 20C)
Current:	13.6 Amps (100Hz 85C), 36 Amps (10kHz 50C), 27 Amps (10kHz 40C)
Leakage:	5890 uAmps (5min 20C)
Inductance:	12 nH (ESL)