


Aluminum Electrolytic, 85C, PEH200, 0.015 F, 20%, 100 V, -40/+85C

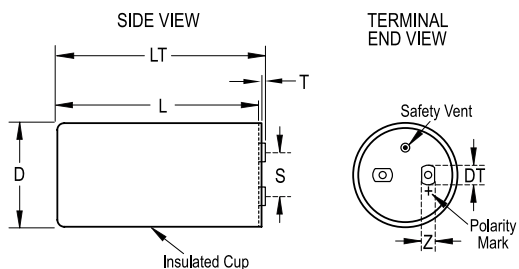

Dimensions	
D	51.6mm +/-1mm
L	103.5mm +/-1mm
T	4.9mm NOM
S	22mm
F	15mm +/-0.5mm
DT	15mm NOM
G	13mm NOM
LT	111.4mm +/-1mm
Z	13mm NOM

Packaging Specifications	
Weight:	265 g
Sleeving:	Yes
Packaging:	Bulk
Packaging Quantity:	20

General Information	
Dielectric:	Aluminum Electrolytic
Series:	PEH200
Description:	Screw Terminal, Aluminum Electrolytic
RoHS:	Yes
Notes:	Dimensions D And L Include Sleeving. M5

Specifications	
Capacitance:	0.015 F
Capacitance Tolerance:	20%
Voltage DC:	100 VDC
Temperature Range:	-40/+85C
Rated Temperature:	85C
Life:	12000 Hrs (Rated Voltage And Ripple Current At 85C)
Resistance:	17 mOhms (100Hz 20C), 14 mOhms (100kHz 20C)
Current:	17.3 Amps (100Hz 85C), 37.6 Amps (10kHz 50C), 27.9 Amps (10kHz 40C)
Leakage:	8500 uAmps (5min 20C)
Inductance:	16 nH (ESL)