FORM 4.04-001F

LTR	REVISION	DATE	APPD
A	050418-GP01: UPDATED DWG. & ADDED P/N (0AG)	05-07-18	GP

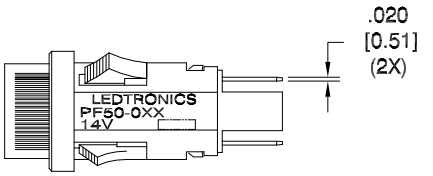

TOP VIEW

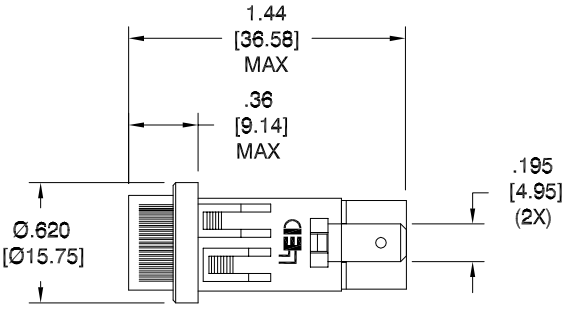

SIDE VIEW



REAR VIEW

RoHS
COMPLIANT
2002/95/EC

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø1/2" (12.7mm)
3. LENS MATERIAL: POLYCARBONATE (PC) (UL 94V-2)
4. SLEEVE MATERIAL / COLOR: NYLON 66 (UL94V-1 MIN / UL94V-0 PREF) / BLACK
5. HEADER MATERIAL / COLOR: NYLON 66 (UL94V-1 MIN / UL94V-0 PREF) / BLACK
6. TERMINAL MATERIAL: BRASS S.A.E. CA 360, FEDERAL QQ-B-626 ALLOY 360
   FINISH: TIN PLATE MIL-T-10727 TYPE I, DULL FINISH, .0001-.00025 THICK.

REVISION NOTIFICATION
☐ DLC
☐ UL/ETL
☐ MADE IN USA
☐ CUSTOMER _____
☐ OTHER

REDLINE CHECKLIST
☐ REDLINE(YES)
☐ DATE: _____
☐ INITIATED BY: _____
☐ ECR REQUIRED YES ☐ NO ☐
☐ WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)
PF50-0AG-014V-T	-	AQUA GREEN	12/14Vdc(@14Vdc)	0.010-0.015 A	-	520	180°
PF50-0UR-014V-T	-	ULTRA RED	12/14Vdc(@14Vdc)	0.015-0.020 A	0.900cd	652	180°
PF50-0UY-014V-T	-	SUPER YELLOW	12/14Vdc(@14Vdc)	0.015-0.020 A	-	595	180°
PF50CG5-14V-T	PF50CG5-14V/20-B/T1	HI-EFF GREEN	12/14Vdc(@14Vdc)	0.015-0.020 A	-	563	180°

LEDTRONICS, INC.
23105 KASHIWA COURT
TORRANCE, CA 90505

.XXX ± .010 TOLERANCE PER ANSI-Y14.5 (UNLESS OTHERWISE STATED)
.XX ± .025
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE: PF50-0XX-014V-T
PF50CXX-14V-T

DWG NO	SCALE	SHEET	DATE
PF50-14VDC-T	1:1	1 OF 1	07-03-12

CODE IDENT NO.	DWG BY	CHK BY	QA	MFG	R&D
8Z410	GP 07-03-12		EE 05-09-18	LD 05-09-18	LUV 05-09-18