




LTR	REVISION	DATE	APPD
-	RELEASED	05-27-15	

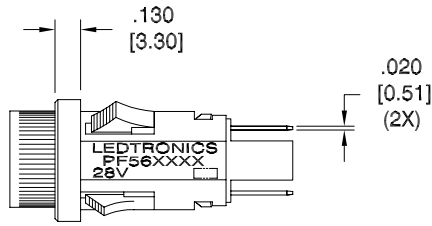

TOP VIEW

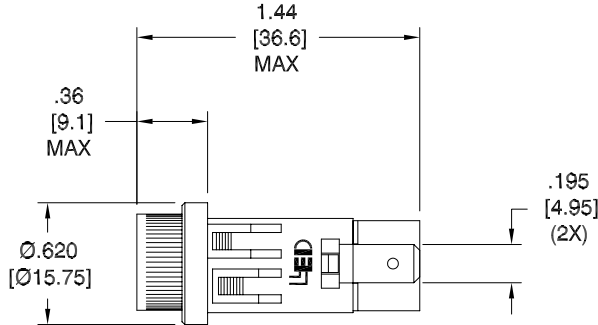

SIDE VIEW



REAR VIEW

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø1/2" (12.7mm)
3. LENS MATERIAL: POLYCARBONATE (PC) (UL 94V-2)
4. SLEEVE MATERIAL: BLACK, NYLON 66 (UL94V-1 MIN / UL94V-0 PREF)
5. HEADER MATERIAL: BLACK, NYLON 66 (UL94V-1 MIN / UL94V-0 PREF)
6. TERMINAL MATERIAL: BRASS S.A.E. CA 360, FEDERAL QQ-B-626 ALLOY 360
FINISH: TIN PLATE MIL-T-10727 TYPE I, DULL FINISH, .0001-.00025 THICK.



REVISION NOTIFICATION

<input type="checkbox"/> DLC
<input type="checkbox"/> UL/ETL
<input type="checkbox"/> MADE IN USA
<input type="checkbox"/> CUSTOMER _____
<input type="checkbox"/> OTHER

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta=25°C)

PF56CG6-0006	PF56CG6-28V/20-B/T1	HI-EFF GREEN	24/28Vdc	0.013-0.015 A	0.075cd	565	160°
PF56CR6-0008	PF56CR6-28V/20-B/T1	HI-EFF RED	24/28Vdc	0.013-0.015 A	0.045cd	633	160°
PF56CY6-0005	PF56CY6-28V/20-B/T1	YELLOW	24/28Vdc	0.013-0.015 A	0.030cd	585	160°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	INPUT VOLTAGE, V @28Vdc (typ)	CURRENT (A)	MAXIMUM CANDELA	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)



-PROPRIETARY-
This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
.XX ± .025 (UNLESS OTHERWISE STATED)
ANGLES ± 0°,30'
FRACT. ± 1/32

TITLE PF56CX6-000X (PF56CX6-28V/20-B/T1)					
DWG NO	SCALE	SHEET	DATE		
PF56-28VDC-T	1:1	1 OF 1	05-27-15		
CODE IDENT NO. 8Z410	DWG BY GP 05-27-15	CHK BY PL 05-27-15	QA	MFG	R&D