


## PHE426DJ5470JR05

Aliases (F426JJ473J100C, PHE426DJ5470JJ02R05)

Not for New Design

PHE426/F426, Film, Metallized Polypropylene, General Purpose, 0.047 uF, 5%, 100 VDC, 85°C, Lead Spacing = 5mm

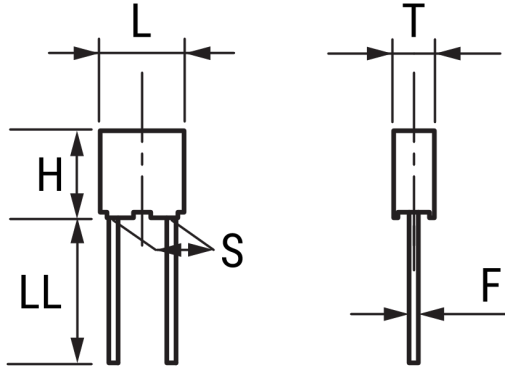

Click [here](#) for the 3D model.

### Dimensions

|    |              |
|----|--------------|
| L  | 7.2mm MAX    |
| H  | 8mm MAX      |
| T  | 3.5mm MAX    |
| S  | 5mm +/-0.4mm |
| LL | 5mm NOM      |
| F  | 0.5mm NOM    |

### Packaging Specifications

|                    |           |
|--------------------|-----------|
| Packaging          | Bulk, Bag |
| Packaging Quantity | 2000      |

### General Information

|                          |                          |
|--------------------------|--------------------------|
| Series                   | PHE426/F426              |
| Dielectric               | Metallized Polypropylene |
| Style                    | Radial                   |
| Features                 | Pulse                    |
| RoHS                     | Yes                      |
| Lead                     | Wire Leads               |
| AEC-Q200                 | No                       |
| Typical Component Weight | 0.298 g                  |
| Notes                    | Series Replaced by R75.  |

### Specifications

|                       |                          |
|-----------------------|--------------------------|
| Capacitance           | 0.047 uF                 |
| Capacitance Tolerance | 5%                       |
| Voltage AC            | 63 VAC                   |
| Voltage DC            | 100 VDC, 74 VDC (105C)   |
| Temperature Range     | -55/+105°C               |
| Rated Temperature     | 85°C                     |
| Dissipation Factor    | 0.05% 1kHz, 0.25% 100kHz |
| Insulation Resistance | 100 GOhms                |
| Max dV/dt             | 100 V/us                 |
| Inductance            | 6 nH                     |