




ISSUE	2
REPLACES	PL-100
CHECK	PAGE 1 OF 1
REVISIONS	RELEASE NO. PR-24202
A 20086	
J A	
29 MAR 00	

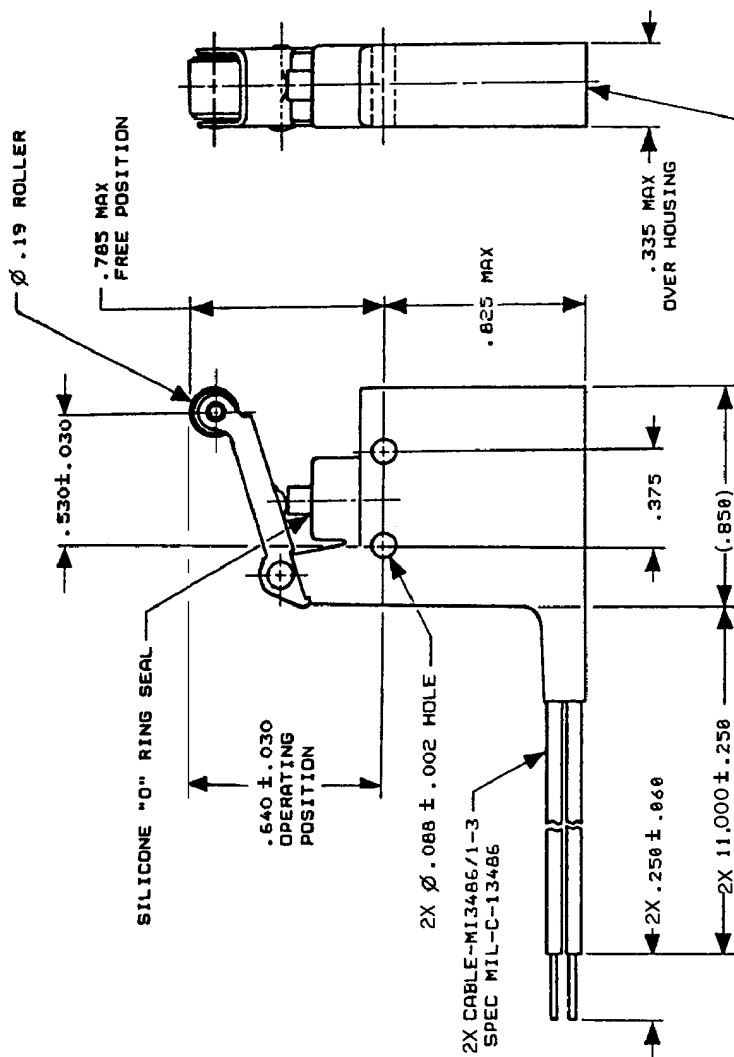

ANSI Y14.5M-1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS	ELECTRICAL DATA	THIRD ANGLE PROJECTION
OPERATING FORCE AT ROLLER - - - -16 OZ MAX	CONTACT ARRANGEMENT	SCALE 2:1
RELEASE FORCE AT PLUNGER - - - -5 OZ MIN	SPNO-DB	DO NOT SCALE PRINT
PRETRAVEL - - - - -115 MAX		UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
DIFFERENTIAL TRAVEL - - - - .058 MAX		ONE PLACE (.01) ± .030
OVERTRAVEL - - - - - .025 MIN		TWO PLACE (.00) ± .015
	10 AMP 125/250 VAC	THREE PLACE (.000) ± .005
	7.5 AMP 28 VDC IND	ANGLES ±
		WEIGHT ±

SEALED WITH EPOXY POTTING COMPOUND

- NOTES
1. SWITCH SEALED PER MIL-PRF-8805 SYMBOL 3, WATERTIGHT
 2. BASIC SWITCH MIL-PRF-8805/7 TYPE
 3. STAINLESS STEEL PLUNGER & ROLLER ENCLOSURE TO MEET REQ. OF U.S. ARMY TANK AUTOMOTIVE COMMAND NO. 7748750
 4. ROLLER ARM IS PHOS. BRONZE