

Distributed by:





JAMECO[®]
ELECTRONICS

www.Jameco.com ♦ 1-800-831-4242


The content and copyrights of the attached
material are the property of its owner.

Jameco Part Number 71263

P.L.C.C. Socket

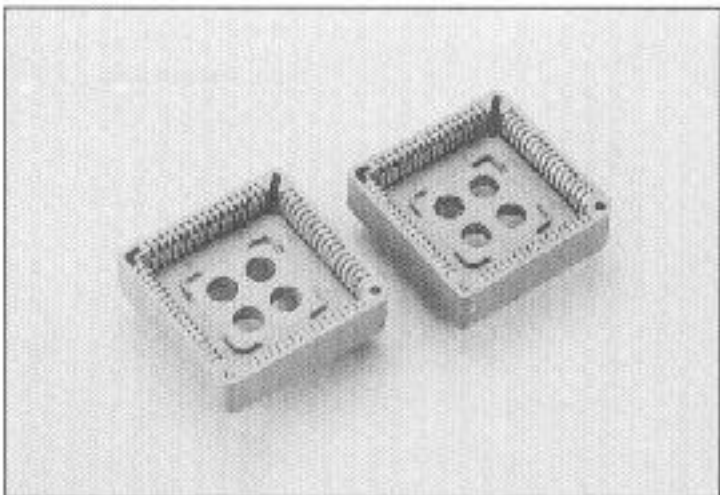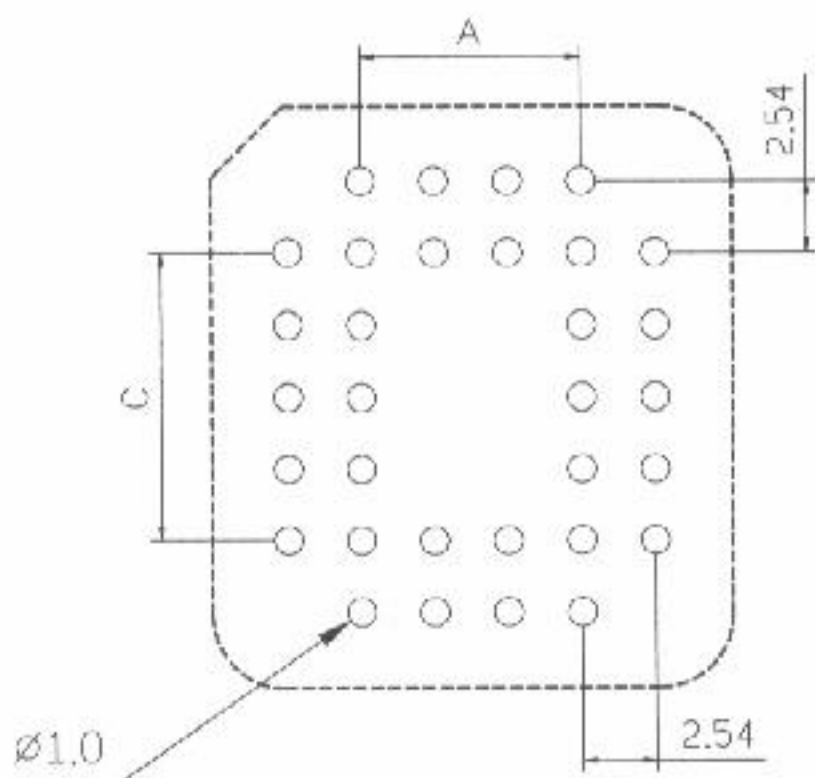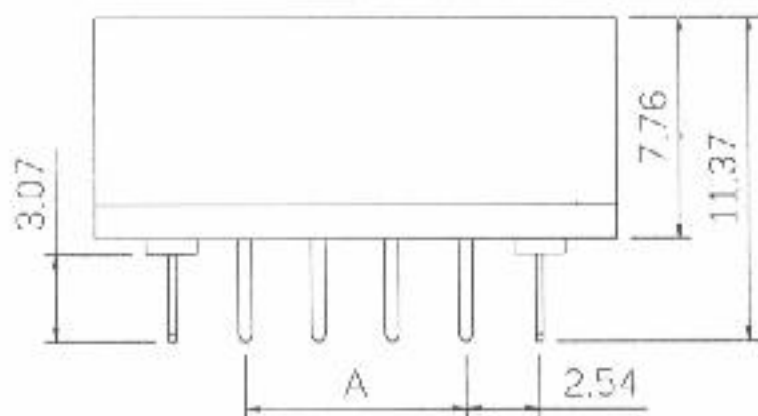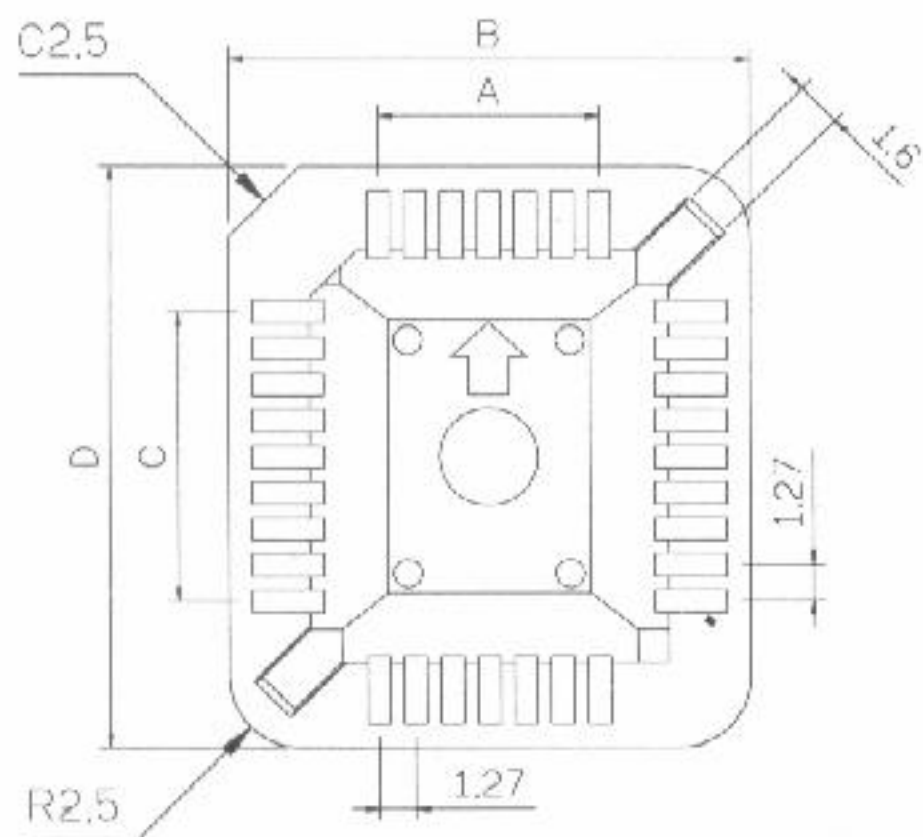

ROHS

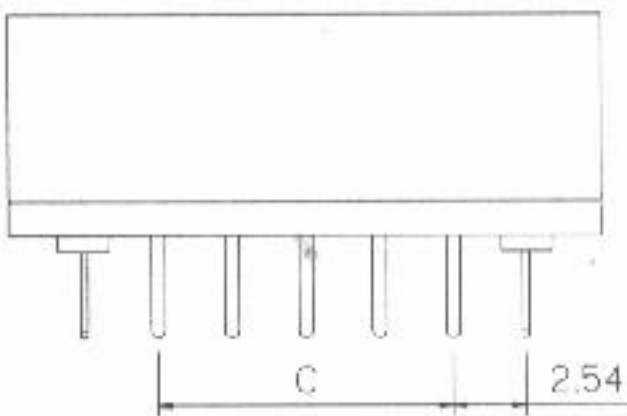

Dimensions

Positions	A	B	C	D
20	5.08	15.50	5.08	15.50
28	7.62	18.04	7.62	18.04
32	7.62	18.04	10.16	20.50
44	12.70	23.48	12.70	23.48
52	15.24	25.88	15.24	25.88
68	20.32	31.04	20.32	31.04
84	25.40	36.04	25.40	36.04

Recommended PCB Layout

Product Specification

Material

Insulator : Glass-Filled Thermoplastic
PBT or PPS UL94V-0 rates

Contact: Phosphor Bronze, plated full
gold or selected gold in mating area,
100u" min. tin-lead on termination area,
with entire contact under-plated 50u"
min. Nickel

Electrical

Contact Resistance : 30 milliohms
Max at 1 AMP DC.

Insulation Resistance : 1000
megohms at 500 VDC

Dielectric Withstanding Voltage :
500 VAC/rms 60Hz for 1 minute

Current Rating : 1 AMP

Voltage Rating : 250 VAC/rms
60Hz