


**KEMET Part Number: PME278RE6100MR30**  
(P278EJ104M440A)



PME278/P278, Film, Metallized Paper, Safety, 0.1 uF, 20%, 440 VAC (X1), 1000 VDC, 110°C, Lead Spacing = 25.4mm

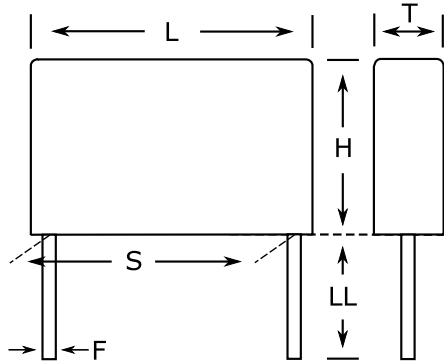

**Dimensions**

<b>L</b>	30.5mm MAX
<b>H</b>	19mm MAX
<b>T</b>	12.1mm MAX
<b>S</b>	25.4mm +/-0.4mm
<b>LL</b>	30mm +5mm
<b>F</b>	1mm +/-0.05mm

**Packaging Specifications**

<b>Packaging:</b>	Bulk, Bag
<b>Packaging Quantity:</b>	100

**General Information**

<b>Series:</b>	PME278/P278
<b>Dielectric:</b>	Metallized Paper
<b>Style:</b>	Radial
<b>Features:</b>	EMI Safety
<b>RoHS:</b>	Yes
<b>Lead:</b>	Wire Leads
<b>Safety Class:</b>	X1
<b>Qualifications:</b>	ENEC
<b>AEC-Q200:</b>	No
<b>Construction:</b>	Molded
<b>Miscellaneous:</b>	SRF= 3.9 MHz.
<b>Notes:</b>	Not For New Design, Please Use The New P278 Series @ 480 VAC.

**Specifications**

<b>Capacitance:</b>	0.1 uF
<b>Capacitance Tolerance:</b>	20%
<b>Voltage AC:</b>	440 VAC (X1)
<b>Voltage DC:</b>	1000 VDC
<b>Temperature Range:</b>	-40/+110°C
<b>Rated Temperature:</b>	110°C
<b>Dissipation Factor:</b>	1.3% 1kHz
<b>Insulation Resistance:</b>	12 GOhms
<b>Max dV/dt:</b>	600 V/us

Statements of suitability for certain applications are based on our knowledge of typical operating conditions for such applications, but are not intended to constitute - and we specifically disclaim - any warranty concerning suitability for a specific customer application or use. This Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by us with reference to the use of our products is given gratis, and we assume no obligation or liability for the advice given or results obtained.

