


LTR	REVISION	DATE	APPD
-	RELEASED	08-16-11	



**NOTES:**

1. WIRE MATERIAL: THERMOPLASTIC INSULATION, TINNED COPPER STRANDED & BONDED
2. MOUNTING DIAMETER: Ø5/16"
3. LENS MATERIAL: LEXAN 101-112
4. SLEEVE MATERIAL: NYLON 66
5. ALL DIMS ARE IN INCHES [MILLIMETERS].

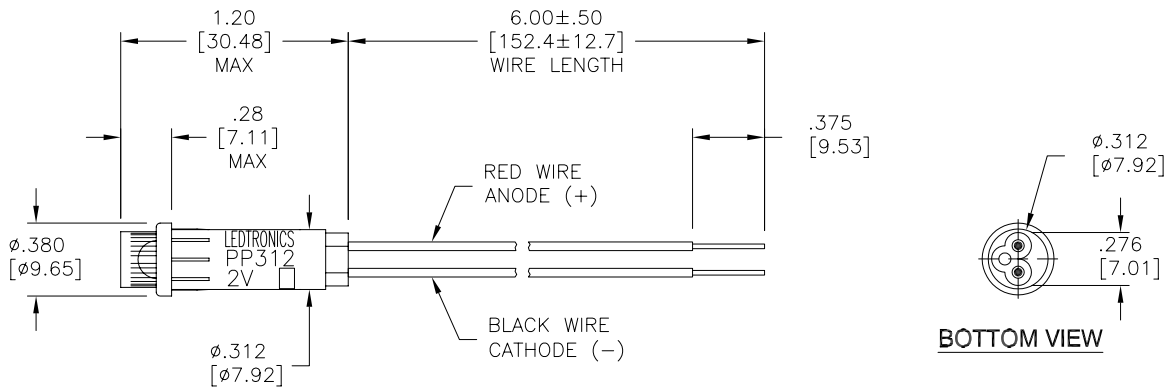

PP312-OUR-002F-W6	-	ULTRA RED	2	20	660	1800	12°-15°	REVISION NOTIFICATION
PP312-OUY-002F-W6	-	SUPER YELLOW	2	20	595	3750	12°-15°	
PP312CG5-0003	PP312CG5-2VF-W6	HI-EFF GREEN	2	20	565	290	20°	
PP312CY5-0003	PP312CY5-2VF-W6	YELLOW	2	20	585	100	20°	
LEDTRONICS PART NO.	PART NO. DESCRIPTION	COLOR EMITTED	VOLTAGE	SET mA	λP nm	lv mcd typ	VIEWING ANGLE	<input type="checkbox"/> PMA <input type="checkbox"/> UL <input type="checkbox"/> MADE IN USA <input type="checkbox"/> CUSTOMER _____ <input type="checkbox"/> OTHER _____

 LEDTRONICS, INC. 23105 KASHIWA COURT TORRANCE, CA 90505	-PROPRIETARY- This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC. .XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0',30' FRACT. ± 1/32	TITLE <b>PP312-XXX-002F-W6</b> <b>PP312CX5-0003</b>			
		DWG NO	SCALE	SHEET	DATE
		PP312-2V-W6	1:1	1 OF 1	08-16-11
CODE IDENT NO.	DWG BY	CHK BY	QA RD	MFG	R&D
8Z410	MM 08-16-11		08-17-11		BJ 08-16-11