



LTR	REVISION	DATE	APPD
-	RELEASED	01-31-20	



ACTUAL SIZE

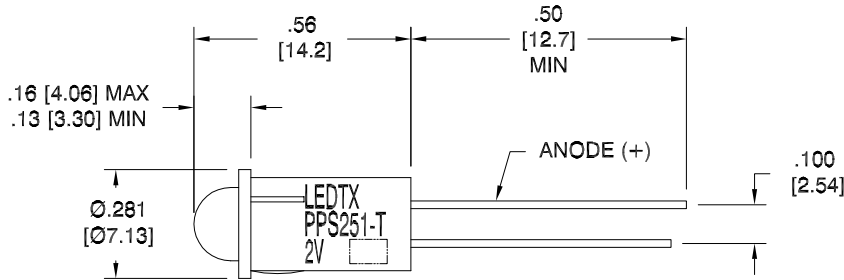

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. MOUNTING DIAMETER: Ø1/4" [6.4mm]
3. SLEEVE MATERIAL / COLOR: NYLON 66 / BLACK

REVISION NOTIFICATION	
<input type="checkbox"/>	DLC
<input type="checkbox"/>	UL/ETL
<input type="checkbox"/>	MADE IN USA
<input type="checkbox"/>	CUSTOMER _____
<input type="checkbox"/>	OTHER
REDLINE CHECKLIST	
<input type="checkbox"/>	REDLINE(YES)
<input type="checkbox"/>	DATE: _____
<input type="checkbox"/>	INITIATED BY: _____
<input type="checkbox"/>	ECR REQUIRED YES <input type="checkbox"/> NO <input type="checkbox"/>
<input type="checkbox"/>	WORK ORDER# _____

ELECTRICAL-OPTICAL CHARACTERISTICS (Ta = 25°C)

PPS251TR3-0011	PPS251TR3-2Vf-T	HI-EFF RED	RED DIFFUSED	20	2.1./2.6	45 mcd	645nm	40°
PPS251TY3-0005	PPS251TY3-2V-T	YELLOW	YELLOW DIFFUSED	20	2.1/2.6	50 mcd	584nm	40°
LEDTRONICS PART NO.	DESCRIPTION PART NO.	COLOR EMITTED	LENS COLOR	If, mA (typ)	Vf, V (typ)/(max)	LUMINOUS INTENSITY	λP nm	VIEWING ANGLE (FULL BEAM WIDTH @ 50% INTENSITY)

<p>LEDTRONICS,™ INC. 23105 KASHIWA COURT TORRANCE, CA 90505</p>	<p>-PROPRIETARY- This document contains Proprietary information of LEDTRONICS,™ INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS,™ INC.</p> <p>.XXX ± .010 TOLERANCE PER ANSI-Y14.5 .XX ± .025 (UNLESS OTHERWISE STATED) ANGLES ± 0°,30' FRACT. ± 1/32</p>	<p>TITLE: PPS251TX3-00XX (PPS251TX3-2Vf-T)</p>					
		DWG NO	SCALE	SHEET	DATE		
		PPS251-2V-T-1	2:1	1 OF 1	01-31-20		
CODE IDENT NO.	DWG BY GP	CHK BY	QA SB	MFG LD	R&D UF		
8Z410	01-31-20		02-03-20	02-03-20	02-03-20		