

Data sheet

PR20BxxVBDN


Page 1/3

P/N
PR20BXXVBDN
 xx=number of poles
 2019/10/31
 Version: N

Illustrations



Dimensional drawing

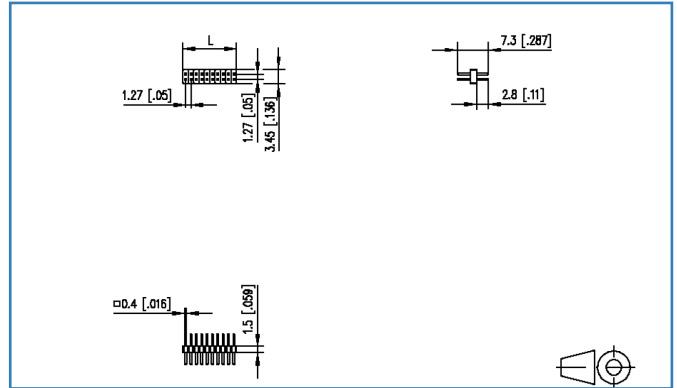

See enlarged drawings at the end of document

Product specification

- pin header, THR solderable
- centerline 1.27 mm, direction of connection vertical 0°
- color black
- dual rows




Technical Data

General Data	
min. number of poles	2
max. number of poles	50
protection category	IP00
Material	
insulating material	PE-HT
contact pin material	CuZn
contact pin surface	Ni + Au Flash
Glow-Wire Flammability GWFI	-
Glow-Wire Flammability GWIT	-
Climatic Data	
upper limit temperature	105 °C
lower limit temperature	-40 °C
General	
Tolerance	ISO 2768 -mH
Solderability	Acc. to IPC/JEDEC J-STD-020D-MSL 1



Illustrations

Dimensional drawing

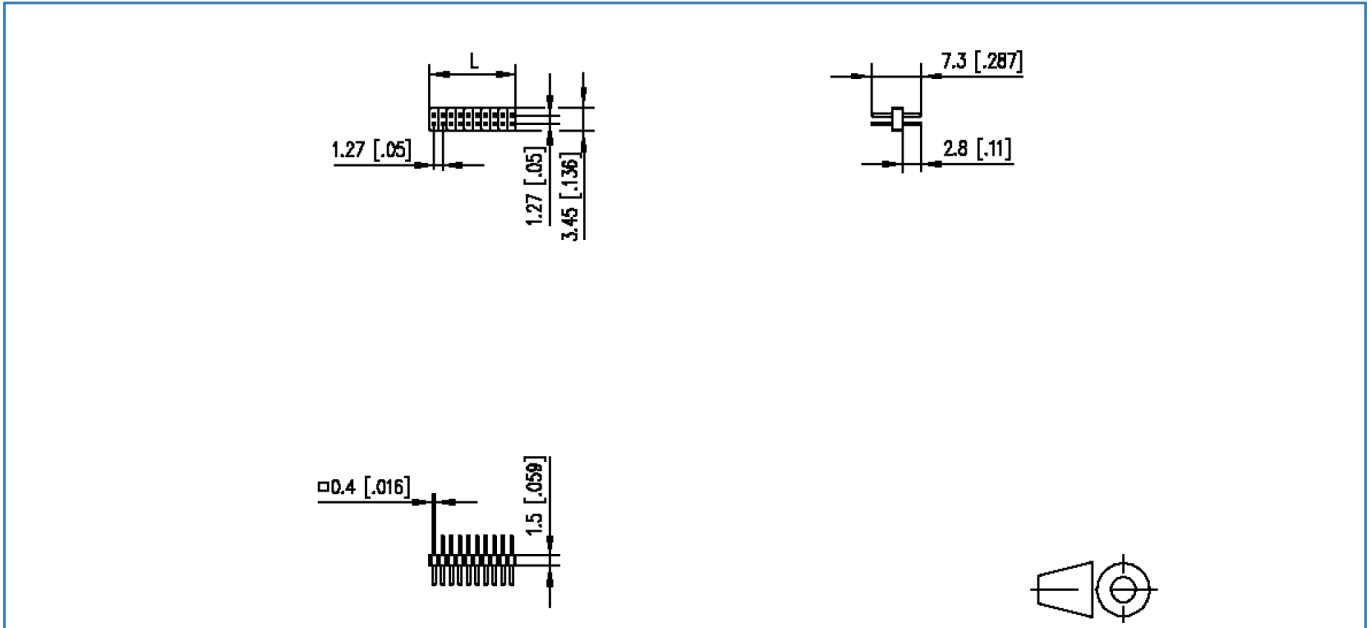

$L = (\text{pole size} - 1) \times \text{centerline} + 1.27 \text{ mm } [0.05]$

© 2019 METZ CONNECT - Technische Änderungen vorbehalten! Subject to modifications! Sous réserve de modifications techniques!