



# .079" [ 2 mm ] Contact Centers, Male Header

## FEATURES

- \* 1 amp current rating
- \* UL Flammability Rating: 94V-O
- \* Insulator: Black Thermoplastic Polyester/Nylon 6-T
- \* Contact Material: Brass

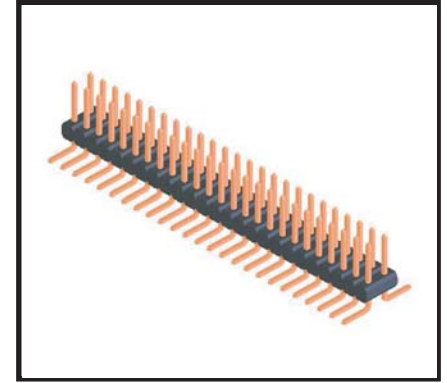

## READOUT



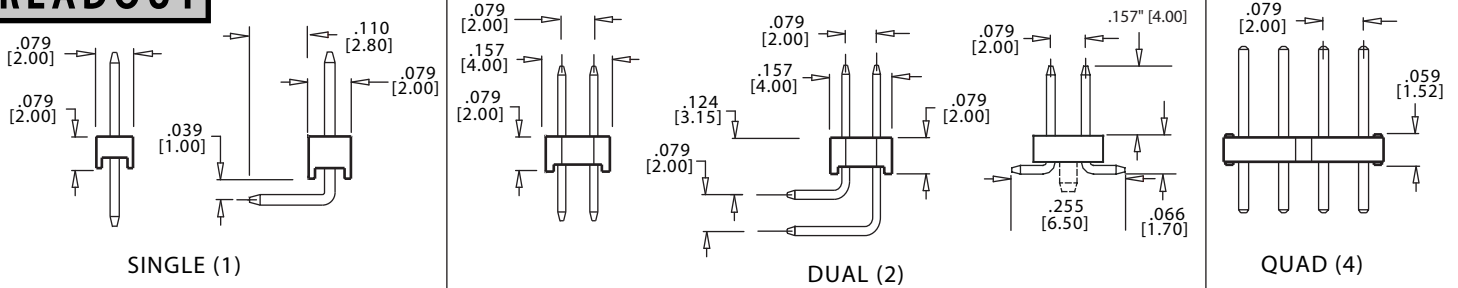


## TERMINATION TYPE



P/N CODE	ROWS	TERM	HEAD	TAIL
PAE	1	STRIAGHT	.157" [4.00]	.110" [2.80]
PAE	2	STRIAGHT	.157" [4.00]	.110" [2.80]
RCC	4	STRIAGHT	.173" [4.40]	.094" [2.40]

P/N CODE	ROWS	TERM	HEAD	TAIL
PAR	1	RIGHT ANGLE	.157" [4.00]	.110" [2.80]
PAR	2	RIGHT ANGLE	.157" [4.00]	.110" [2.80]



P/N CODE	ROWS	TERM	HEAD	TAIL
MAM	2	SMT	.157" [4.00]	.255" [6.50]

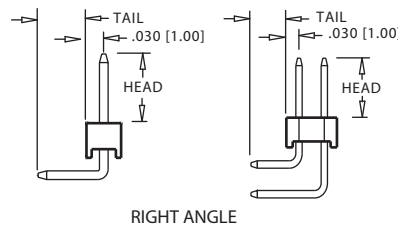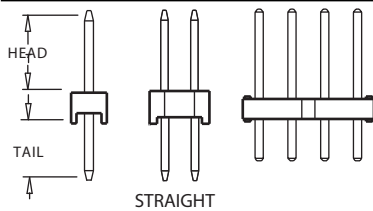



## Mounting Style



No Mounting-  
Default Standard (N)




Two Row SMT,  
Without guide post(S)




Two Row SMT,  
with guide post (P)

## JUMPER




PART NUMBER:  
SPN02SYBN (GOLD FLASH)  
STN02SYBN (TIN PLATE)




# .079" [ 2 mm ] Contact Center Male Header

## PART NUMBER CODING \*

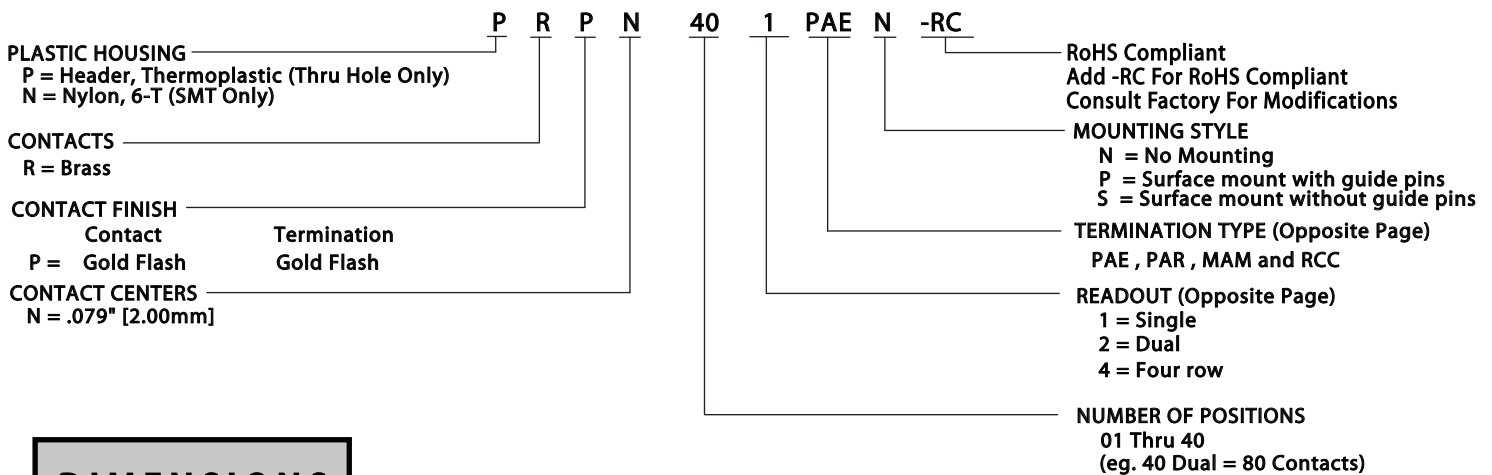

## DIMENSIONS

Dimensions in [ ] are in millimeters, all others in inches.

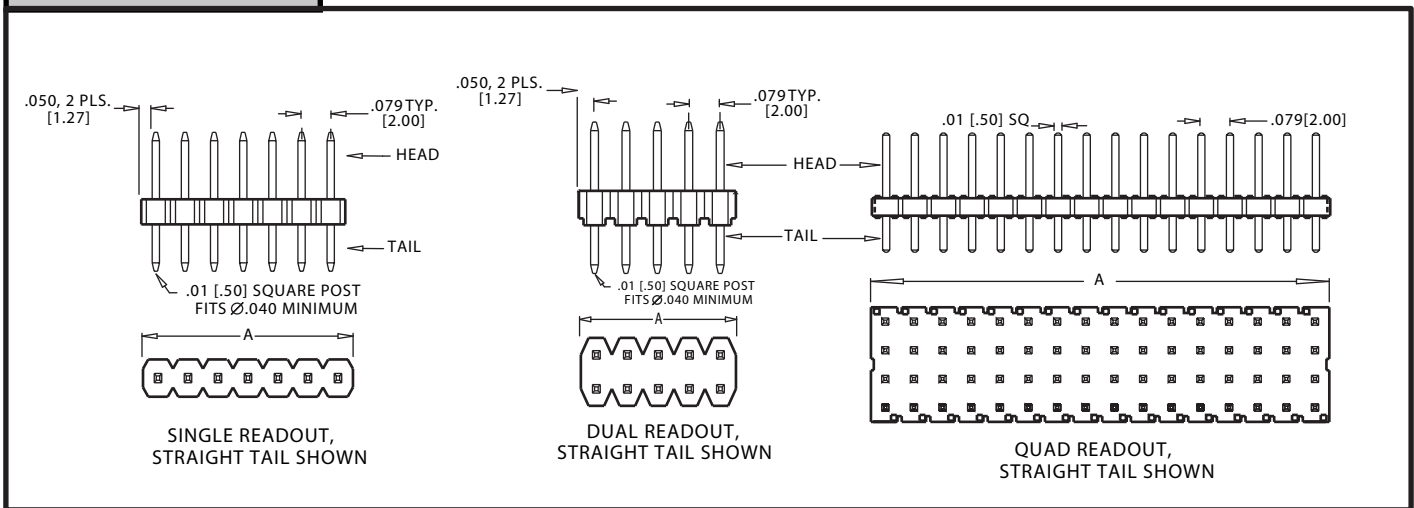

PART NUMBER*	NUMBER OF CONTACTS SINGLE/DUAL/QUAD	OVERALL LENGTH A
PRPN01 __ N	1/2	0.079 [2.00]
PRPN02 __ N	2/4	0.157 [4.00]
PRPN03 __ N	3/6	0.236 [6.00]
PRPN04 __ N	4/8	0.314 [8.00]
PRPN05 __ N	5/10	0.393 [10.00]
PRPN06 __ N	6/12/24	0.472 [12.00]
PRPN07 __ N	7/14	0.551 [14.00]
PRPN08 __ N	8/16	0.629 [16.00]
PRPN09 __ N	9/18	0.708 [18.00]
PRPN10 __ N	10/20/40	0.787 [20.00]
PRPN11 __ N	11/22	0.866 [22.00]
PRPN12 __ N	12/24/44	0.944 [24.00]
PRPN13 __ N	13/26	1.023 [26.00]
PRPN14 __ N	14/28	1.102 [28.00]
PRPN15 __ N	15/30/60	1.181 [30.00]
PRPN16 __ N	16/32	1.259 [32.00]
PRPN17 __ N	17/34	1.338 [34.00]
PRPN18 __ N	18/36/72	1.417 [36.00]
PRPN19 __ N	19/38	1.496 [38.00]
PRPN20 __ N	20/40	1.574 [40.00]

PART NUMBER*	NUMBER OF CONTACTS SINGLE/DUAL/QUAD	OVERALL LENGTH A
PRPN21 __ N	21/42/84	1.653 [42.00]
PRPN22 __ N	22/44	1.732 [44.00]
PRPN23 __ N	23/46	1.811 [46.00]
PRPN24 __ N	24/48/96	1.889 [48.00]
PRPN25 __ N	25/50	1.968 [50.00]
PRPN26 __ N	26/52	2.047 [52.00]
PRPN27 __ N	27/54	2.125 [54.00]
PRPN28 __ N	28/56	2.204 [56.00]
PRPN29 __ N	29/58	2.283 [58.00]
PRPN30 __ N	30/60/120	2.362 [60.00]
PRPN31 __ N	31/62	2.440 [62.00]
PRPN32 __ N	32/64	2.519 [64.00]
PRPN33 __ N	33/66	2.598 [66.00]
PRPN34 __ N	34/68	2.677 [68.00]
PRPN35 __ N	35/70	2.755 [70.00]
PRPN36 __ N	36/72	2.834 [72.00]
PRPN37 __ N	37/74	2.913 [74.00]
PRPN38 __ N	38/76	2.992 [76.00]
PRPN39 __ N	39/78	3.070 [78.00]
PRPN40 __ N	40/80	3.149 [80.00]

\* For complete part number add readout and termination type from Part Number Coding (e.g. PRPN401PAEN).