


THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.

PANDUIT PART NUMBER	STUD SIZE	DIMENSIONS in.				
		A ^{±.020}	W ^{±.010}	C ^{±.015}	M ^{±.020}	H ^{±.010}
PV2-10RX	#10	1.94 (.49.28)	.68 (.17.27)	.58 (.14.73)	1.60 (.40.64)	.20 (.5.08)
PV2-14RX	1/4"	1.94 (.49.28)	.68 (.17.27)	.58 (.14.73)	1.60 (.40.64)	.27 (.6.86)
PV2-56RX	5/16"	1.94 (.49.28)	.68 (.17.27)	.58 (.14.73)	1.60 (.40.64)	.33 (.8.38)
PV2-38RX	3/8"	1.94 (.49.28)	.68 (.17.27)	.58 (.14.73)	1.60 (.40.64)	.39 (.9.91)
PV2-12RX	1/2"	2.03 (.51.56)	.86 (.21.84)	.58 (.14.73)	1.60 (.40.64)	.52 (1.3.21)

NOTES:

1. UL LISTED FOR:
 - A. 600V MAX VOLTAGE RATING
 - B. 221° F (105° C) MAX TEMP RATING
 - C. #2 AWG STRANDED COPPER WIRE
2. PACKAGE QTY: STD. PKG. 10
 BULK PKG. 200
3. MATERIAL:
 - A. STAMPING - .060" (15.2) THK COPPER,
 TIN PLATED
 - B. HOUSING - VINYL, RED
4. DIMENSIONS IN BRACKETS ARE IN MILLIMETERS
5. INSTALLATION TOOL: CT-720

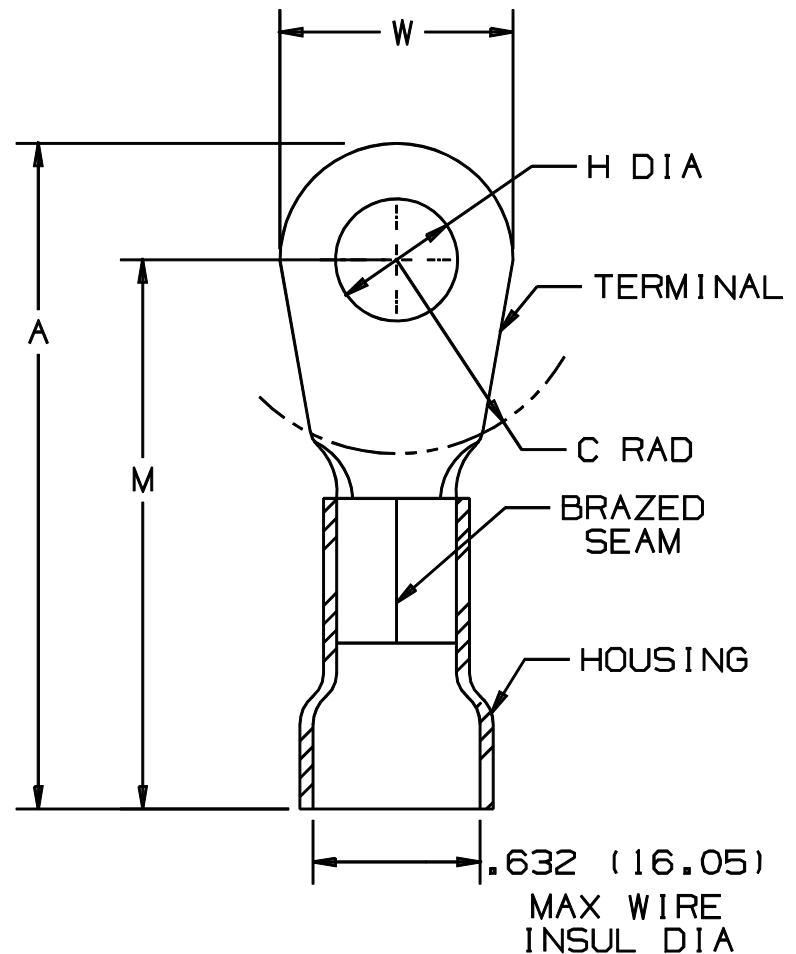

A41220_03

									 PANDUIT CORP. TINLEY PARK, ILLINOIS			
03	1/01	RM		FILESPEC WAS A41220A:1L1					#2 BARREL VINYL INSULATED RING TONGUE .632 (16.05) MAX. WIRE INSUL. DIAMETER			
2	7-88	DW		REDRAWN WITH REVISIONS								
REV	DATE	BY	CHK	DESCRIPTION	ECN#	QA	CUST	PM	DRAWN BY	CHK'D	SCALE	DRAWING NO.
									DAW		NONE	A41220