

Q25 Series

Ø25mm panel mount LED indicators



DISTINCTIVE FEATURES

- 18.2mm colored Fresnel lens
- 200 mm long wire terminations
- Rear epoxy sealed



ENVIRONMENTAL SPECIFICATIONS

- Above panel sealing tested to IP67 & IP69K
- Operating & Storage Temperature Range:
Operating temperature: -40 °C to +85 °C (-40 °F to +185 °F)
Storage temperature: -40 °C to +100 °C (-40 °F to +212 °F)



GENERAL SPECIFICATIONS

- Operating voltage: 12 to 24 Vac/dc
- Current consumption: 30 mA (nominal across operating voltage range)
- Reverse voltage protection: the indicator has no polarity
- Over-voltage protection: activates at 36 V
- Viewing Angle: 60°
- Life Expectancy: 100,000 hours
- Maximum panel thickness: 9 mm
- Insulation resistance : 4,000 MΩ at 500 VDC




MATERIALS

- Stainless steel 316L body, PC lens, Nitrile o-ring



MOUNTING

- Mounting torque: 75 cNm/0.75 Nm

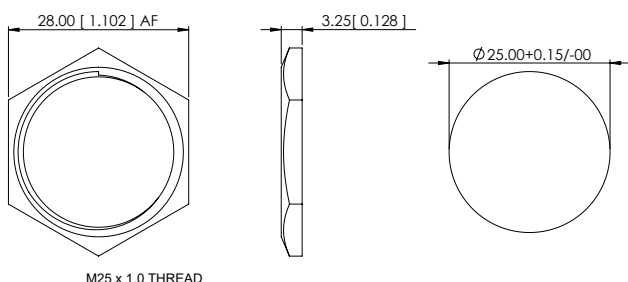

Q25 series

Ø25 mm panel mount LED indicators



ELECTRICAL SPECIFICATIONS

STANDARD LED INTENSITY


LED COMPONENT SPECIFICATIONS		
	Typical intensity (mcd)	Forward Voltage (Vac/dc)
Red	5400 mcd	7.5
Green	6900 mcd	7.5
Yellow	5100 mcd	7.5
Blue	2000 mcd	7.5
White	6900 mcd	7.5

ADDITIONAL INFORMATION ON LED COMPONENTS

- The operating voltage must not be exceeded by more than 20% as this will result in reduced life expectancy.
- Luminous intensity is measured at 30 mA unless otherwise stated.



CONNECTIONS

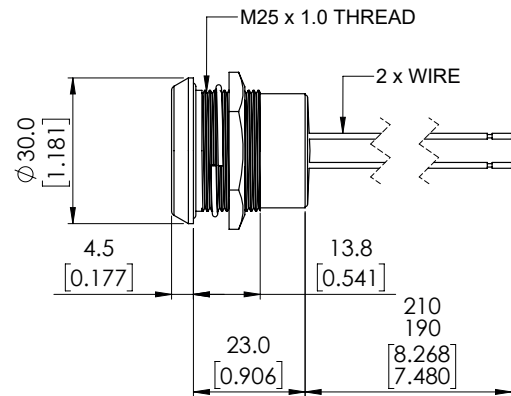

Q25 series

Ø25 mm panel mount LED indicators

LED INDICATORS



BUILD YOUR PART NUMBER

Q	25	Y	5	S
SERIES	MOUNTING HOLE	BEZEL STYLE	TERMINALS	BEZEL FINISH
	25 Ø25mm	Metal Y Chamfer	5 Rear epoxy Wires	Metal S Stainless Steel

XX		1A	E
TYPE OF ILLUMINATION	LED COLOR	VOLTAGE	SEALING
XX Fixed Light	R Red G Green Y Yellow B Blue W White	1A 12 to 24 VAC/DC	E Sealed



ABOUT THIS SERIES

• Standard wire length is 200 mm, 20 AWG UL1007, for other wire lengths consult APEM.