

R3G146-EC50-01

EC centrifugal fan

forward-curved, single-intake

Automotive



ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

Nominal data

| | | |
|--------------------------|-------------------|----------|
| Type | R3G146-EC50-01 | |
| Motor | M3G084-BF | |
| Nominal voltage | VDC | 26 |
| Nominal voltage range | VDC | 16 .. 32 |
| Method of obtaining data | | fa |
| Status | | prelim. |
| Speed (rpm) | min ⁻¹ | 2750 |
| Power consumption | W | 280 |
| Current draw | A | 10.8 |
| Min. back pressure | Pa | 0 |
| Min. back pressure | in. wg | 0 |
| Min. ambient temperature | °C | -40 |
| Max. ambient temperature | °C | 85 |

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to Commission Regulation (EU) 327/2011

| | | Actual | Req. 2015 |
|-----------------------------------|---|--------|-----------|
| 01 Overall efficiency η_{es} | % | 46.1 | 34.1 |
| 02 Measurement category | | A | |
| 03 Efficiency category | | Static | |
| 04 Efficiency grade N | | 56 | 44 |
| 05 Variable speed drive | | Yes | |

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

| | | |
|-------------------------------|-------------------|------|
| 09 Power consumption P_e | kW | 0.27 |
| 09 Air flow q_v | m ³ /h | 420 |
| 09 Pressure increase p_{fs} | Pa | 962 |
| 10 Speed (rpm) n | min ⁻¹ | 3975 |
| 11 Specific ratio* | | 1.01 |

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$

LU-186494



Technical description


| | |
|---|---|
| Weight | 1.5 kg |
| Fan size | 146 mm |
| Cover material | PP plastic |
| Blade material | PA plastic |
| Balancing grade according to DIN ISO 1940-1 | G 10 |
| Direction of rotation | Clockwise, viewed toward rotor |
| Degree of protection | IP24 KM; (motor); electronics IP 6K9K |
| Insulation class | "B" |
| Moisture (F) / Environmental (H) protection class | H4 |
| Ambient temperature note | Over +75°C with power derating |
| Max. permitted ambient temp. for motor (transport/storage) | +90 °C |
| Min. permitted ambient temp. for motor (transport/storage) | -40 °C |
| Installation position | Shaft horizontal or rotor on bottom; rotor on top on request |
| Condensation drainage holes | None, open rotor |
| Cooling hole/opening | On rotor side |
| Mode | S1 |
| Motor bearing | Ball bearing; (sealed) |
| Life expectancy | 40,000 h (typical) |
| Technical features | <ul style="list-style-type: none"> - Tach output - Power limiter - Load dump (58 V) - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Temperature derating - Overvoltage detection - Thermal overload protection for electronics - Reverse polarity protection |
| Electrical hookup | With plug; Standby current less than 500 µA |
| Motor protection | Reverse polarity and locked-rotor protection |
| Comment | E1 approval in preparation |

EC centrifugal fan

forward-curved, single-intake

Automotive

Product drawing

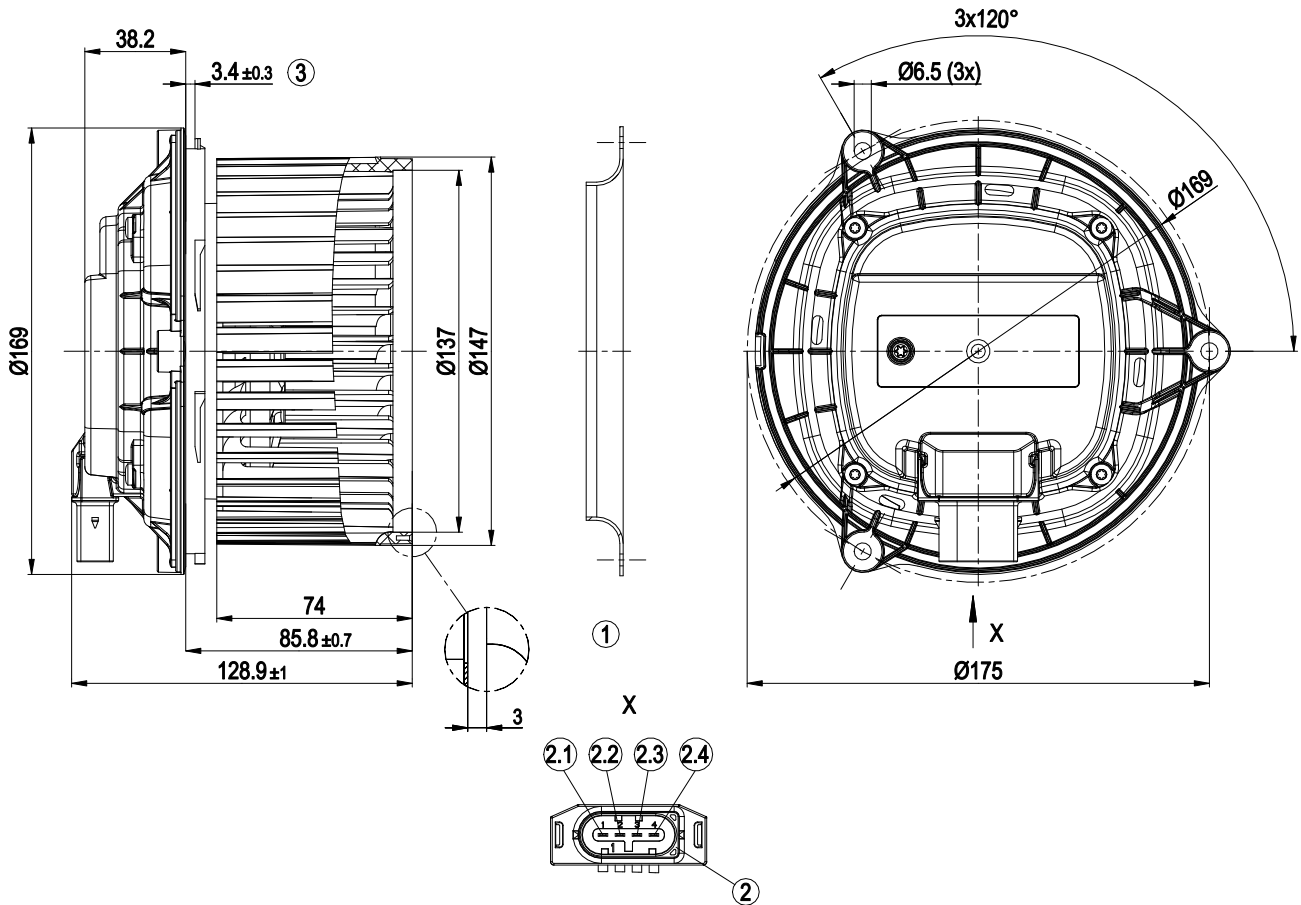

| | |
|-----|---|
| 1 | Accessory part: inlet ring 09576-2-4013 not included in scope of delivery |
| 2 | 4-pole plug, pluggable with cable from accessories |
| 2.1 | Diagnostic output |
| 2.2 | PWM |
| 2.3 | + UB |
| 2.4 | GND |
| | Cable from accessories not included in scope of delivery |
| | Mating connector TE MCP 2.8, 4-pole 1-1718628-1 |
| | Plug contacts: 2.8 mm TE 1-968855-1 and TE 1-968857-1 |
| | Seal: TE 828904-1 and TE 828905-1 |
| 3 | Bayonet attachment for metal or plastic |
| | A detailed drawing of the recess required for bayonet attachment can be obtained from ebmpapst. |




EC centrifugal fan

forward-curved, single-intake

Automotive

Accessory part

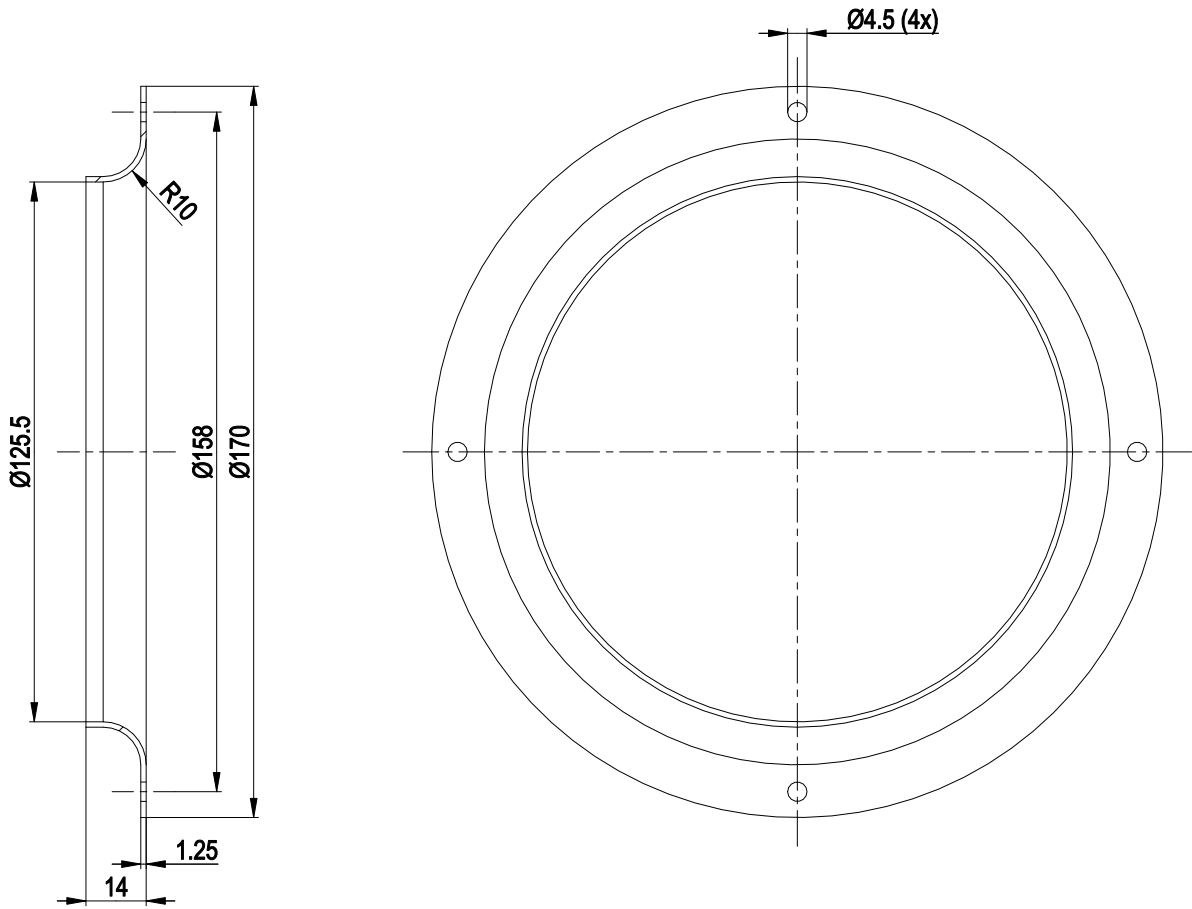

1 Accessory part: inlet ring 09576-2-4013 not included in scope of delivery




EC centrifugal fan

forward-curved, single-intake

Automotive


Connection diagram

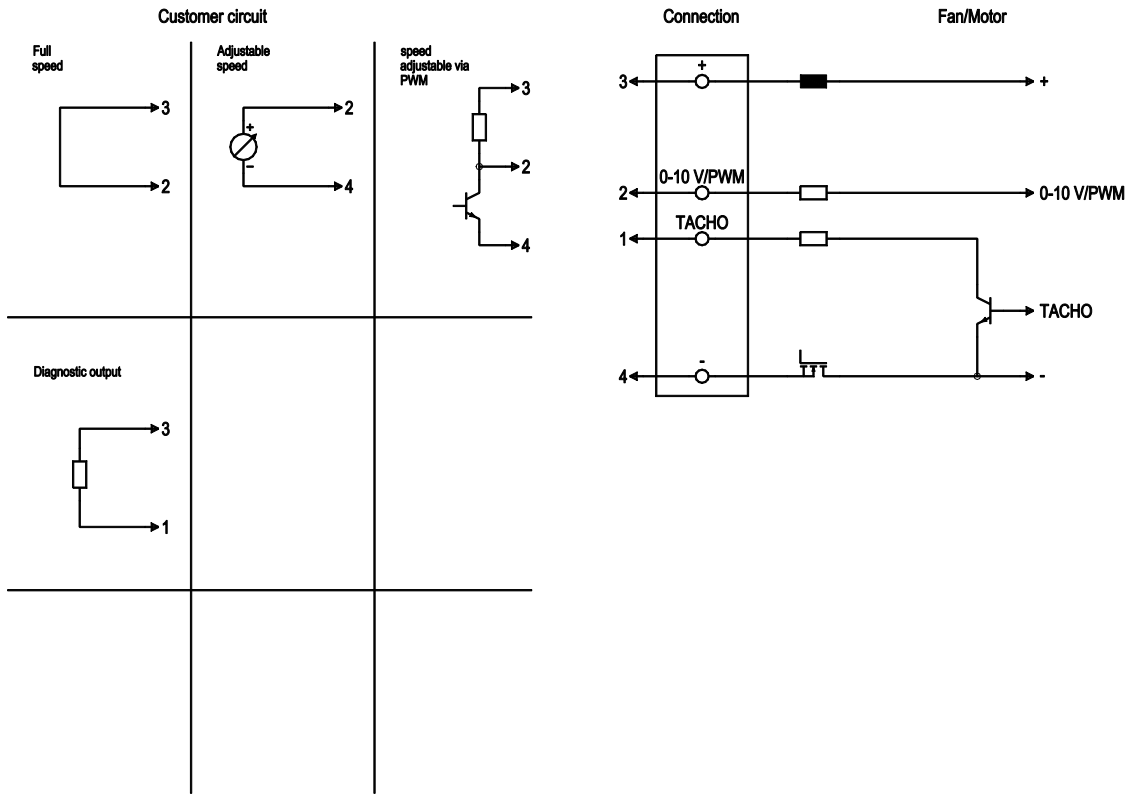

| No. | Conn. | Designation | Function/assignment |
|-----|-------|--------------|--|
| | 3 | + | Power supply + |
| | 2 | 0-10 V / PWM | Control input $R_i > 36 \text{ k}\Omega$ 0-10 V __typ. $< 1 \text{ V} \Rightarrow n=0$ __ $1,5 \text{ V} \Rightarrow n=\text{min}$ __ $> 9,5 \text{ V} \Rightarrow n=\text{max}$ or PWM ($> 10 \text{ V}$; 1-10 kHz) __typ. $< 4 \% \Rightarrow n=0$ __ $10 \% \Rightarrow n=\text{min}$ __ $> 95 \% \Rightarrow n=\text{max}$) |
| | 1 | Tacho | Tach output: open collector, 1 pulse per revolution, $I_{\text{sink max}} = 10 \text{ mA}$, $R_i = 2.1 \text{ k}\Omega$ |
| | 4 | - | Power supply - |



Curves: Air performance

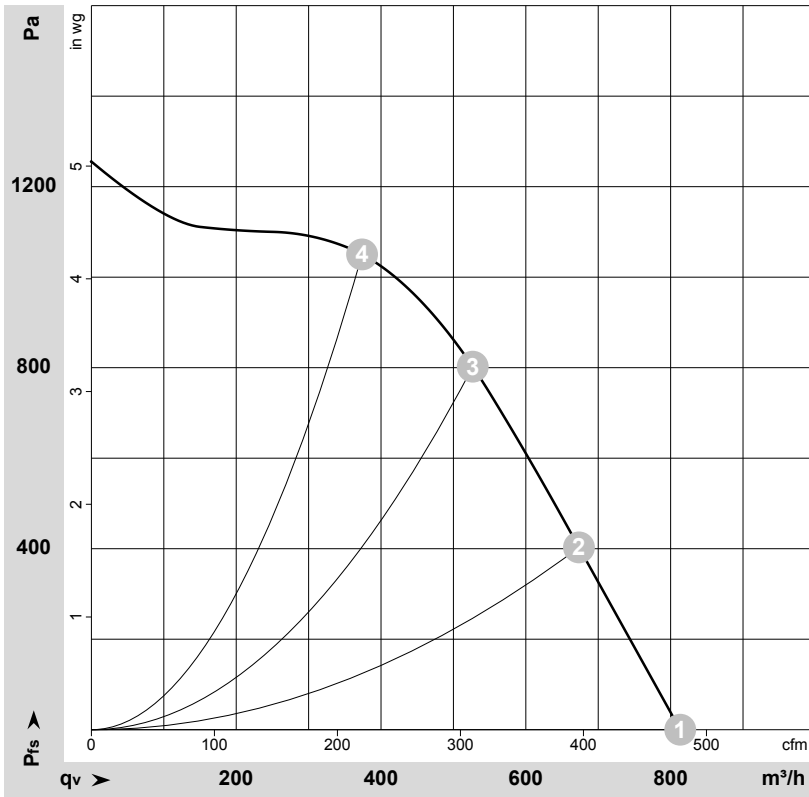

$\rho = 1.15 \text{ kg/m}^3 \pm 2 \%$

Measurement: LU-178834-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

| | U | n | P _{ed} | I | LpA _{in} | LwA _{in} | q _v | p _{fs} | q _v | p _{fs} |
|---|----|-------------------|-----------------|-------|-------------------|-------------------|-------------------|-----------------|----------------|-----------------|
| | V | min ⁻¹ | W | A | dB(A) | dB(A) | m ³ /h | Pa | cfm | in. wg |
| 1 | 26 | 2750 | 280 | 10.80 | 73 | 79 | 815 | 0 | 480 | 0.00 |
| 2 | 26 | 3245 | 280 | 10.80 | 72 | 78 | 675 | 400 | 395 | 1.61 |
| 3 | 26 | 3815 | 280 | 10.80 | 72 | 78 | 525 | 800 | 310 | 3.21 |
| 4 | 26 | 4225 | 245 | 9.55 | 72 | 79 | 375 | 1050 | 220 | 4.22 |

U = Power supply · n = Speed (rpm) · P_{ed} = Power consumption · I = Current draw · LpA_{in} = Sound pressure level intake side · LwA_{in} = Sound power level intake side · q_v = Air flow
 p_{fs} = Pressure increase

