

R3G250-AK41-71

# EC centrifugal fan

backward-curved, single-intake



## ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

## Nominal data

Type	R3G250-AK41-71	
Motor	M3G084-DF	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed (rpm)	min <sup>-1</sup>	3390
Power consumption	W	490
Current draw	A	3.1
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	45

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment  
Subject to change

## Data according to Commission Regulation (EU) 327/2011

		Actual	Req. 2015
01 Overall efficiency $\eta_{es}$	%	48.2	48.2
02 Measurement category		A	
03 Efficiency category		Static	
04 Efficiency grade N		62	62
05 Variable speed drive		Yes	

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

09 Power consumption $P_{ed}$	kW	0.48
09 Air flow $q_v$	m <sup>3</sup> /h	1235
09 Pressure increase $p_{fs}$	Pa	600
10 Speed (rpm) $n$	min <sup>-1</sup>	3390
11 Specific ratio*		1.01

\* Specific ratio =  $1 + p_{fs} / 100\,000\text{ Pa}$


LU-76634



## Technical description

<b>Weight</b>	4.48 kg
<b>Size</b>	250 mm
<b>Motor size</b>	84
<b>Rotor surface</b>	Painted black
<b>Electronics housing material</b>	Die-cast aluminum
<b>Impeller material</b>	Sheet steel, hot-dip galvanized
<b>Number of blades</b>	11
<b>Direction of rotation</b>	Clockwise, viewed toward rotor
<b>Degree of protection</b>	IP54
<b>Insulation class</b>	"B"
<b>Moisture (F) / Environmental (H) protection class</b>	H1
<b>Max. permitted ambient temp. for motor (transport/storage)</b>	+80 °C
<b>Min. permitted ambient temp. for motor (transport/storage)</b>	-40 °C
<b>Installation position</b>	Shaft horizontal or rotor on top; rotor on bottom on request
<b>Condensation drainage holes</b>	None
<b>Mode</b>	S1
<b>Motor bearing</b>	Ball bearing
<b>Technical features</b>	<ul style="list-style-type: none"> <li>- Control input 0-10 VDC / PWM</li> <li>- Output 10 VDC, max. 1.1 mA</li> <li>- Thermal overload protection for electronics/motor</li> <li>- Alarm relay</li> <li>- Line undervoltage detection</li> <li>- Motor current limitation</li> <li>- Soft start</li> </ul>
<b>EMC immunity to interference</b>	According to EN 61000-6-2 (industrial environment)
<b>EMC circuit feedback</b>	According to EN 61000-3-2/3
<b>EMC interference emission</b>	According to EN 61000-6-3 (household environment)
<b>Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)</b>	<= 3.5 mA
<b>Motor protection</b>	Thermal overload protector (TOP) internally connected
<b>With cable</b>	Variable
<b>Protection class</b>	I (with customer connection of protective earth)
<b>Conformity with standards</b>	EN 61800-5-1; CE
<b>Approval</b>	UL 1004-3 + 60730-1; VDE; CSA C22.2 No. 77 + CAN/CSA-E60730-1; CCC; EAC

## Product drawing

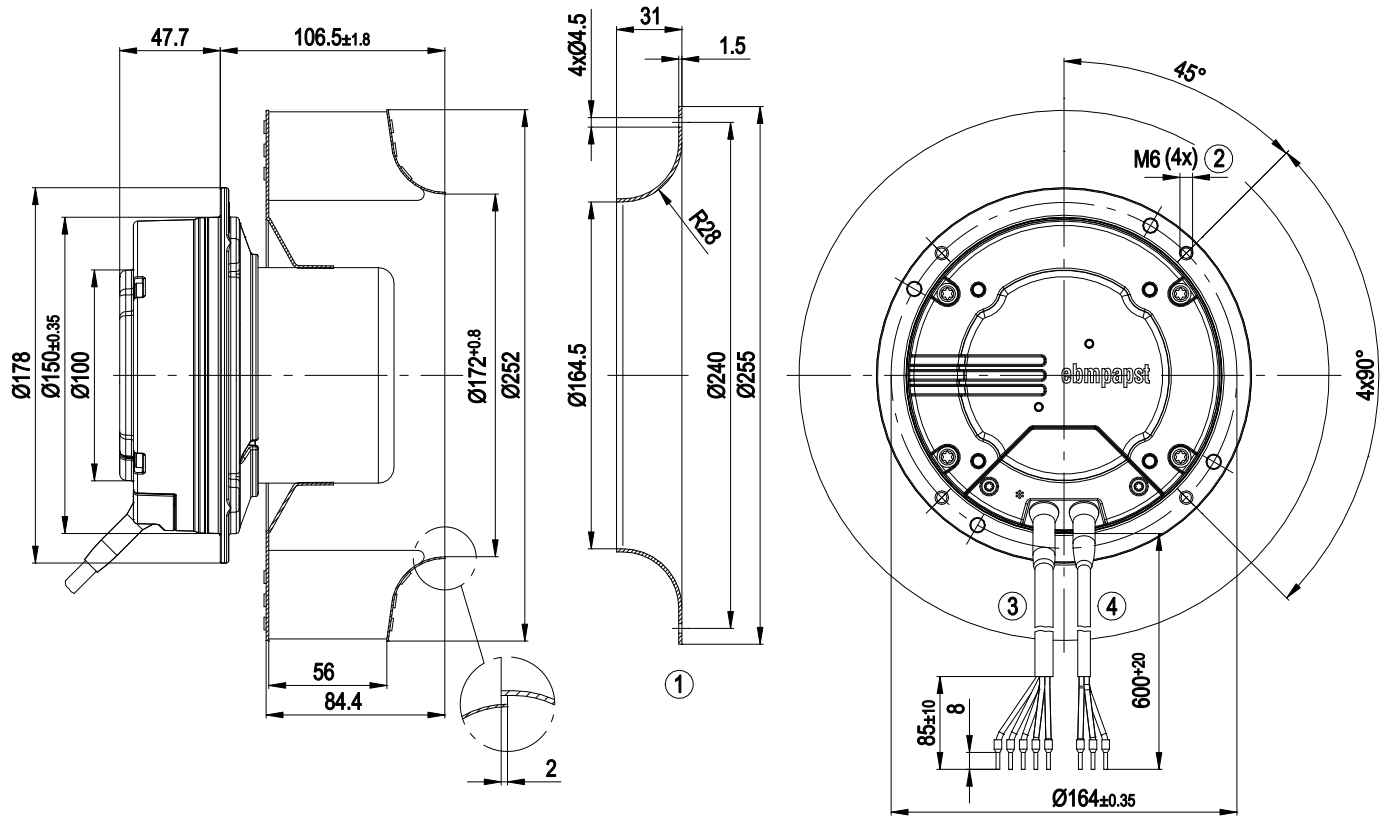


1	Accessory part: Inlet ring 96359-2-4013 not included in scope of delivery, other inlet rings on request
2	Clearance for screw 8-10 mm
3	Cable AWG18, 5x crimped ferrules
4	Cable AWG22, 3x crimped ferrules

## Connection diagram


Customer circuit

Application notes for various control options

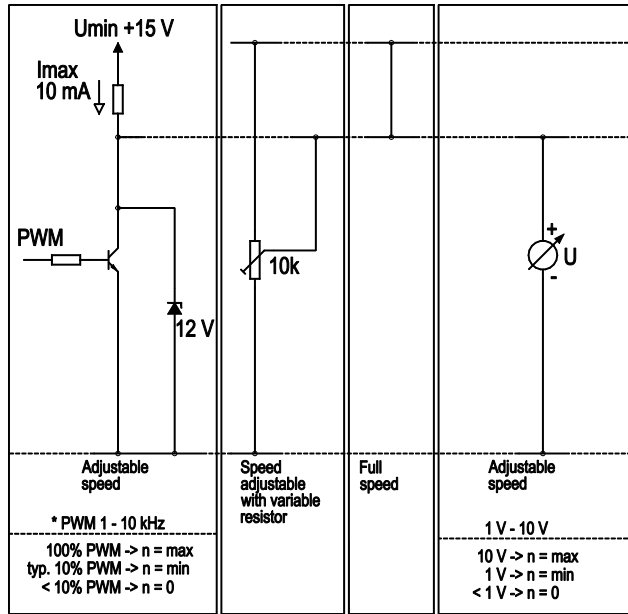


Connection

Fan / Motor

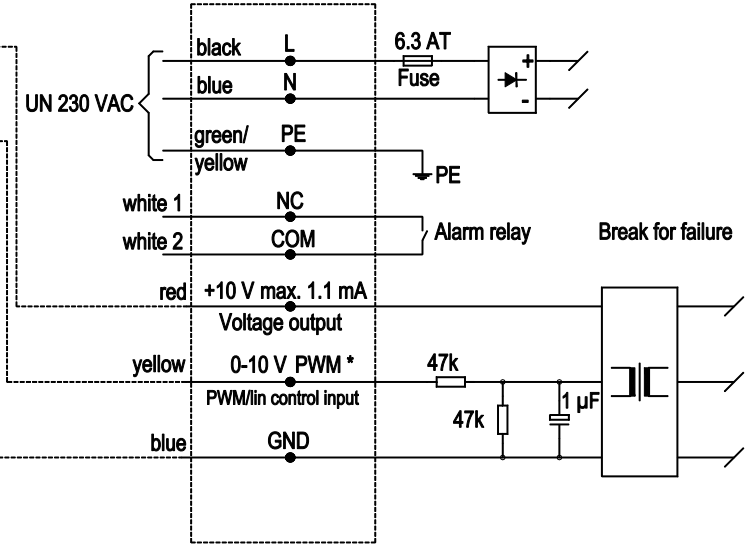

## Curves: Air performance 50 Hz

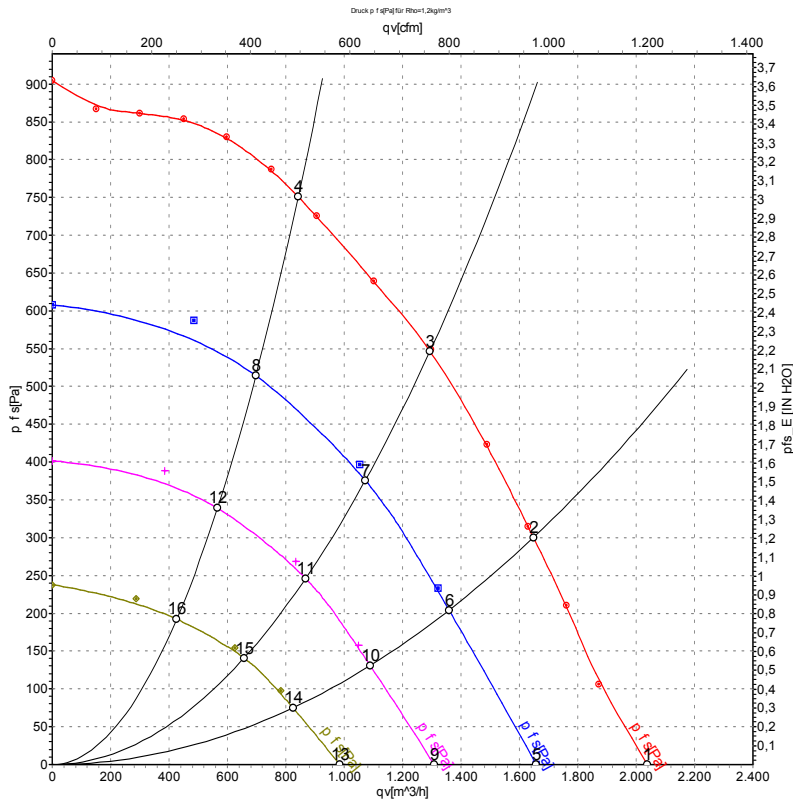

Measurement: LU-111414-1  
Measurement: LU-111481-1  
Measurement: LU-111482-1  
Measurement: LU-111483-1

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebmpapst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

## Measured values

	U	f	n	P <sub>ed</sub>	I	LpA <sub>in</sub>	LwA <sub>in</sub>	q <sub>v</sub>	P <sub>fs</sub>	q <sub>v</sub>	P <sub>fs</sub>
	V	Hz	min <sup>-1</sup>	W	A	dB(A)	dB(A)	m³/h	Pa	cfm	in. wg
1	230	50	3390	324	2.11	77	84	2040	0	1200	0.00
2	230	50	3390	412	2.66	75	82	1650	300	970	1.20
3	230	50	3390	490	3.10	74	81	1295	550	760	2.21
4	230	50	3390	430	2.78	76	83	840	750	495	3.01
5	230	50	2800	180	1.20	74	81	1660	0	975	0.00
6	230	50	2800	230	1.52	70	78	1360	207	800	0.83
7	230	50	2800	264	1.71	68	76	1070	386	630	1.55
8	230	50	2800	225	1.48	70	78	695	516	410	2.07
9	230	50	2250	100	0.71	70	77	1310	0	770	0.00
10	230	50	2250	129	0.89	66	73	1090	134	640	0.54
11	230	50	2250	137	0.94	62	69	870	251	510	1.01
12	230	50	2250	124	0.86	63	71	565	340	335	1.36
13	230	50	1700	48	0.37	65	72	985	0	580	0.00
14	230	50	1700	55	0.42	60	67	825	77	485	0.31
15	230	50	1700	63	0.47	55	63	655	143	385	0.57
16	230	50	1700	56	0.42	56	64	425	193	250	0.77

U = Voltage · f = Frequency · n = Speed (rpm) · P<sub>ed</sub> = Power consumption · I = Current draw · LpA<sub>in</sub> = Sound pressure level intake side · LwA<sub>in</sub> = Sound power level intake side  
q<sub>v</sub> = Air flow · p<sub>fs</sub> = Pressure increase

