

ebm-papst Mulfingen GmbH & Co. KG

Bachmühle 2 · D-74673 Mulfingen

Phone +49 7938 81-0

Fax +49 7938 81-110

info1@de.ebmpapst.com

www.ebmpapst.com

Limited partnership · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRA 590344

General partner Elektrobau Mulfingen GmbH · Headquarters Mulfingen

Amtsgericht (court of registration) Stuttgart · HRB 590142

**Nominal data**

Type	R3G310-AN48-78	
Motor	M3G084-FA	
Phase		1~
Nominal voltage	VAC	230
Nominal voltage range	VAC	200 .. 277
Frequency	Hz	50/60
Method of obtaining data		ml
Speed	min ⁻¹	2400
Power consumption	W	470
Current draw	A	3.0
Min. ambient temperature	°C	-25
Max. ambient temperature	°C	50

ml = Max. load · me = Max. efficiency · fa = Free air · cs = Customer specification · ce = Customer equipment
Subject to change

Data according to ErP Directive

		Actual	Req. 2015			
01 Overall efficiency η_{es}	%	60.1	48	09 Power consumption P_{ed}	kW	0.46
02 Measurement category		A		09 Air flow q_v	m ³ /h	1825
03 Efficiency category		Static		09 Pressure increase p_{fs}	Pa	500
04 Efficiency grade N		74.1	62	10 Speed n	min ⁻¹	2420
05 Variable speed drive		Yes		11 Specific ratio*		1.01

Data obtained at optimum efficiency level.

The ErP data is determined using a motor-impeller combination in a standardized measurement setup.

* Specific ratio = $1 + p_{fs} / 100\,000\text{ Pa}$


LU-111047



Technical description

Weight	5.1 kg
Fan size	310 mm
Rotor surface	Painted black
Electronics housing material	Die-cast aluminum
Impeller material	Sheet aluminum
Number of blades	6
Direction of rotation	Clockwise, viewed toward rotor
Degree of protection	IP54
Insulation class	"B"
Moisture (F) / Environmental (H) protection class	F3-1
Max. permitted ambient temp. for motor (transport/storage)	+80 °C
Min. permitted ambient temp. for motor (transport/storage)	-40 °C
Installation position	Shaft horizontal or rotor on top; rotor on bottom on request
Condensation drainage holes	None
Mode	S1
Motor storage	Ball bearing
Technical features	<ul style="list-style-type: none"> - Output 10 VDC, max. 1.1 mA - Tach output - Motor current limitation - Soft start - Control input 0-10 VDC / PWM - Thermal overload protection for electronics/motor - Line undervoltage detection
EMC immunity to interference	According to EN 61000-6-2 (industrial environment)
EMC circuit feedback	According to EN 61000-3-2/3
EMC interference emission	According to EN 61000-6-3 (household environment)
Touch current according to IEC 60990 (measuring circuit Fig. 4, TN system)	<= 3.5 mA
Motor protection	Thermal overload protector (TOP) internally connected
With cable	Variable
Protection class	I (with customer connection of protective earth)
Conformity with standards	EN 61800-5-1; CE
Approval	CCC; CSA; UL

Product drawing

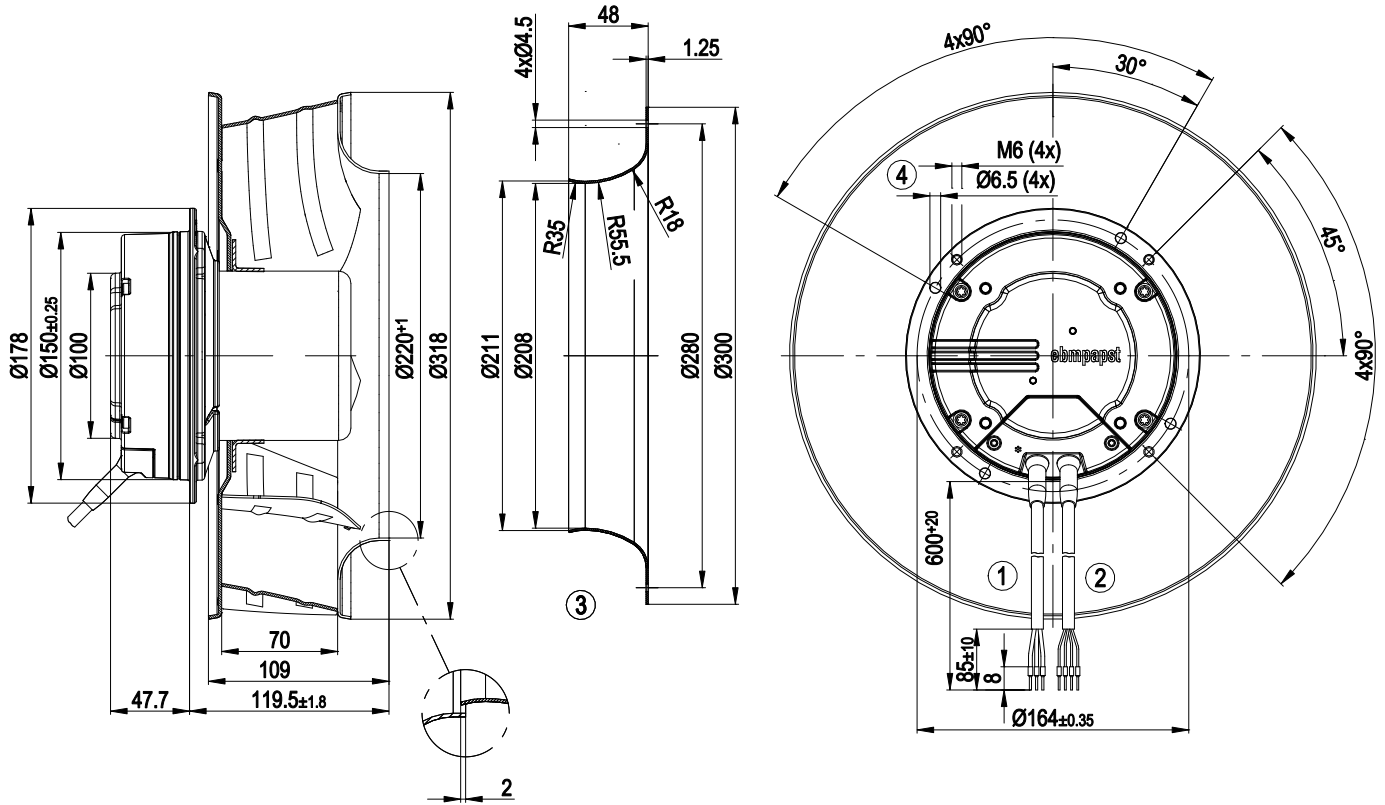

1	Cable PVC AWG18, 3x crimped ferrules
2	Cable PVC AWG22, 4x crimped ferrules
3	Accessory part: inlet ring 31050-2-4013 not included in scope of delivery, other inlet rings on request
4	Clearance for screw 8-10 mm


EC centrifugal fan

backward-curved, single-intake


Connection diagram

Customer circuit

Notes on various control possibilities and their applications

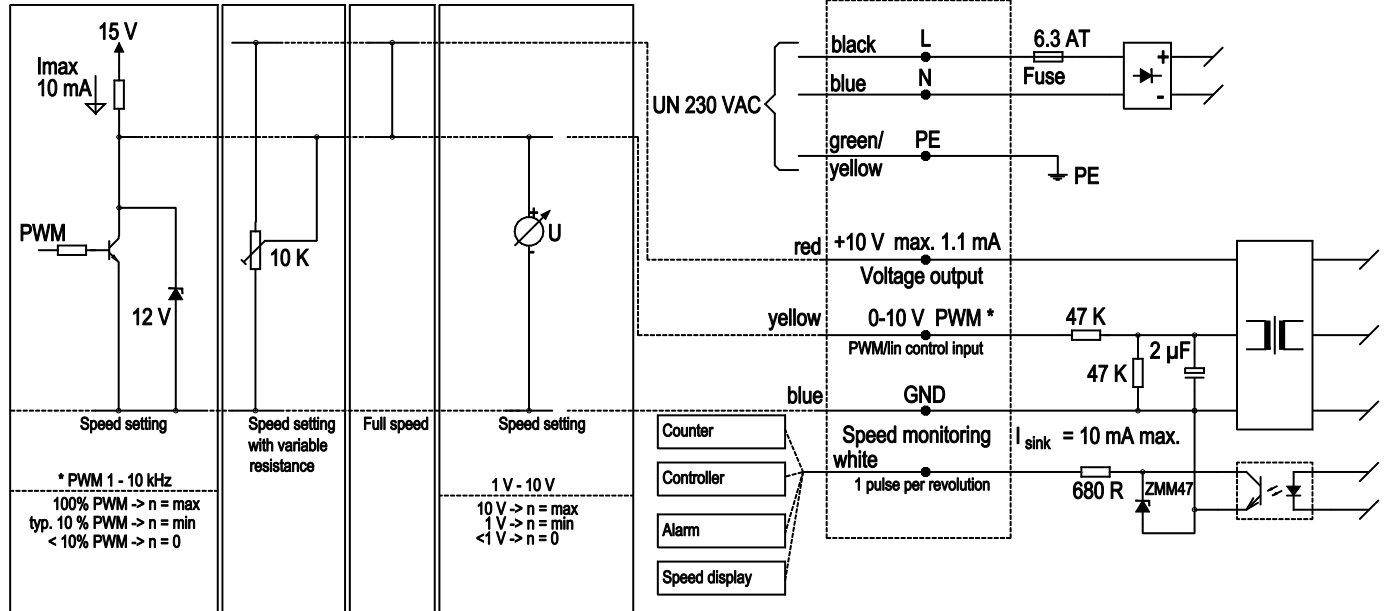

Curves: Air performance 50 Hz

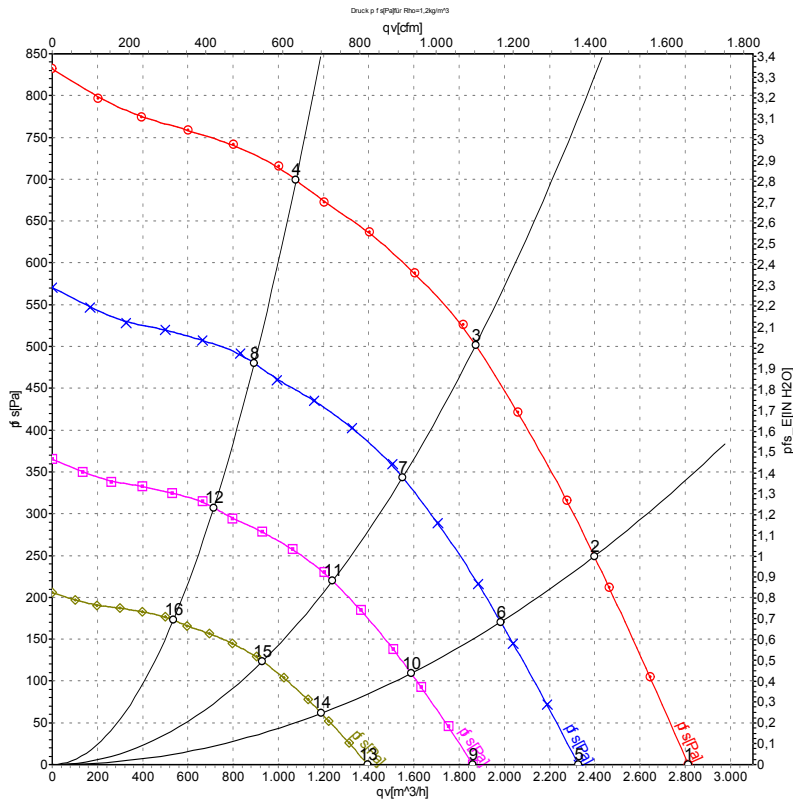

Measurement: LU-111047

Air performance measured according to ISO 5801 installation category A. For detailed information on the measurement setup, contact ebm-papst. Intake sound level: Sound power level according to ISO 13347 / sound pressure level measured at 1 m distance from fan axis. The values given are valid under the specified measuring conditions and may vary due to conditions of installation. For deviations from the standard configuration, the parameters have to be checked on the installed unit.

Measured values

	U	f	n	P _{ed}	I	qv	p _{is}
	V	Hz	min ⁻¹	W	A	m ³ /h	Pa
1	230	50	2400	338	2.18	2815	0
2	230	50	2400	413	2.65	2400	250
3	230	50	2400	470	3.00	1875	500
4	230	50	2400	428	2.75	1080	700
5	230	50	2000	191	1.23	2325	0
6	230	50	2000	234	1.50	1985	170
7	230	50	2000	263	1.68	1550	344
8	230	50	2000	244	1.56	895	480
9	230	50	1600	98	0.63	1860	0
10	230	50	1600	120	0.77	1585	109
11	230	50	1600	134	0.86	1240	220
12	230	50	1600	125	0.80	715	307
13	230	50	1200	41	0.27	1395	0
14	230	50	1200	51	0.33	1190	61
15	230	50	1200	57	0.36	930	124
16	230	50	1200	53	0.34	535	173

U = Power supply · f = Frequency · n = Speed · P_{ed} = Power consumption · I = Current draw · qv = Air flow · p_{is} = Pressure increase

