
T&B Sta-Kon

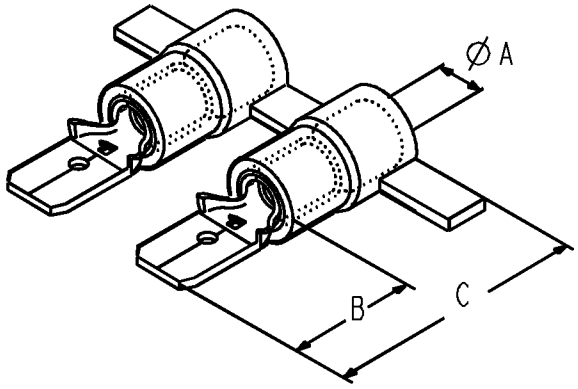

CATALOG No.	DESCRIPTION	Ø A	B	C	REEL QTY
RA250T-PS	22-16 MALE TAB DISCONNECT .250 X .032	.157	.433	.866	2500
RB250T-PS	16-14 MALE TAB DISCONNECT .250 X .032	.177	.433	.866	2500
RC250T-PS	12-10 MALE TAB DISCONNECT .250 X .032	.252	.433	.945	2000

MATERIALS:
TERMINAL - BRASS
INSULATOR - NYLON

FINISH:
TIN PLATED

RATINGS:
TERMPERATURE - 105°C
VOLTAGE - 600V

CRIMP TOOLING:
BENCH PRESS - EBP22-10

APPLICATORS:
RED 22-16 AWG - RAH22-16
BLUE 16-14 AWG - BAH16-14
YELLOW 12-10 AWG - YAH12-10

STRIP LENGTH:
RED 22-16 = .250
BLUE 16-14 = .250
YELLOW 12-10 = .312

GENERAL NOTES

1. ALL DIMENSIONS ARE FOR REFERENCE ONLY.
2. DIMENSIONS IN BRACKETS [ ] ARE IN METRIC UNITS.

REVISIONS


0 SEE ERN (*******) FOR APPROVAL SIGNATURES & RELEASE DATE. PROJECT NO:

Thomas&Betts
www.tnb.com

DESCRIPTION: **NYLON DISCONNECTS, PLASTIC STRIP TERMINALS**

ORIGINAL PROJECT NO / (ERN NO)	SHEET NO:	REV. NO:	DRAWING NO:
TM401332 / (2008318)	1 OF 3	0	WSD-000348

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
©2007 Thomas & Betts - Proprietary, All Rights Reserved

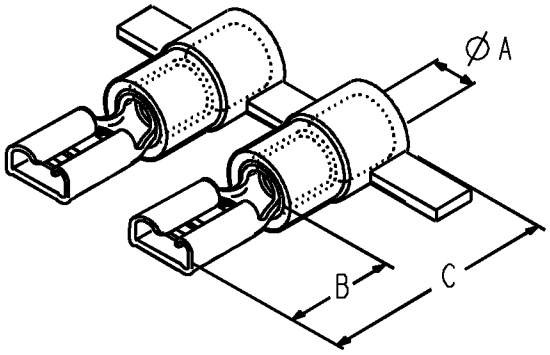

CATALOG No.	DESCRIPTION	ØA	B	C	QTY
RA111D-PS	22-16 FEMALE DISCONNECT .110 X .020	.157	.339	.772	2500
RA110D-PS	22-16 FEMALE DISCONNECT .110 X .032	.157	.339	.772	2500
RB111D-PS	16-14 FEMALE DISCONNECT .110 X .020	.177	.339	.772	2500
RB110D-PS	16-14 FEMALE DISCONNECT .110 X .032	.177	.339	.772	2500
RA188D-PS	22-16 FEMALE DISCONNECT .187 X .020	.157	.354	.787	2500
RA187D-PS	22-16 FEMALE DISCONNECT .187 X .032	.157	.354	.787	2500
RA250D-PS	22-16 FEMALE DISCONNECT .250 X .032	.157	.413	.846	2500
RB188D-PS	16-14 FEMALE DISCONNECT .187 X .020	.177	.354	.787	2500
RB187D-PS	16-14 FEMALE DISCONNECT .187 X .032	.177	.354	.787	2500
RB250D-PS	16-14 FEMALE DISCONNECT .250 X .032	.177	.413	.846	2500
RC250D-PS	12-10 FEMALE DISCONNECT .250 X .032	.252	.413	.925	2000

MATERIALS:
TERMINAL - BRASS
INSULATOR - NYLON

FINISH:
TIN PLATED

RATINGS:
TERMPERATURE - 105°C
VOLTAGE - 600V


* CRIMP TOOLING:
  BENCH PRESS - EBP22-10
* APPLICATORS:
  RED 22-16 AWG - RAH22-16
  BLUE 16-14 AWG - BAH16-14
  YELLOW 12-10 AWG - YAH12-10
* STRIP LENGTH:
  RED 22-16 = .250
  BLUE 16-14 = .250
  YELLOW 12-10 = .312

Thomas&Betts
www.tnb.com

DESCRIPTION: **NYLON DISCONNECTS, PLASTIC STRIP TERMINALS**

SHEET NO:	REV. NO:	DRAWING NO:
2 OF 3	0	WSD-000348

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
©2007 Thomas & Betts - Proprietary, All Rights Reserved

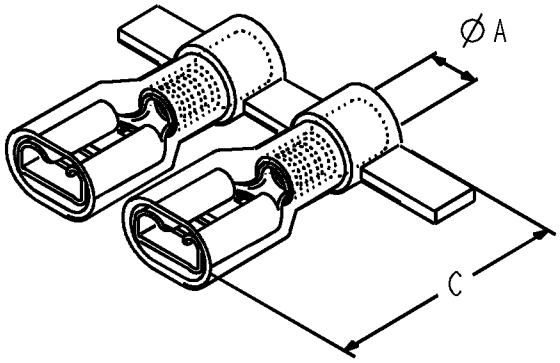

CATALOG No.	DESCRIPTION	ØA	B	C	QTY
RA250DF-PS	22-16 FULLY INSULATED FEMALE DISCONNECT ,250 X .032	.157	----	.846	2500
RB250DF-PS	16-14 FULLY INSULATED FEMALE DISCONNECT ,250 X .032	.197	----	.846	2500
RC250DF-PS	12-10 FULLY INSULATED FEMALE DISCONNECT ,250 X .032	.252	----	.929	2000

MATERIALS:
TERMINAL - BRASS
INSULATOR - NYLON

FINISH:
TIN PLATED

RATINGS:
TERMPERATURE - 105°C
VOLTAGE - 600V

CRIMP TOOLING:
BENCH PRESS - EBP22-10

APPLICATORS:
RED 22-16 AWG - RAH22-16
BLUE 16-14 AWG - BAH16-14
YELLOW 12-10 AWG - YAH12-10

STRIP LENGTH:
RED 22-16 = .250
BLUE 16-14 = .250
YELLOW 12-10 = .312

Thomas&Betts
www.tnb.com

DESCRIPTION: **NYLON DISCONNECTS, PLASTIC STRIP TERMINALS**

SHEET NO:	REV. NO:	DRAWING NO:
3 OF 3	0	WSD-000348

THIS DRAWING IS INTENDED FOR DESCRIPTIVE PURPOSES ONLY. AND THE RIGHT IS RESERVED TO DEVIATE FROM ANY OF THE DETAILS SHOWN HEREON.
©2007 Thomas & Betts - Proprietary, All Rights Reserved