
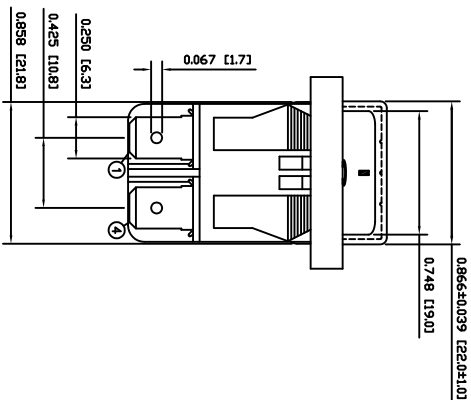
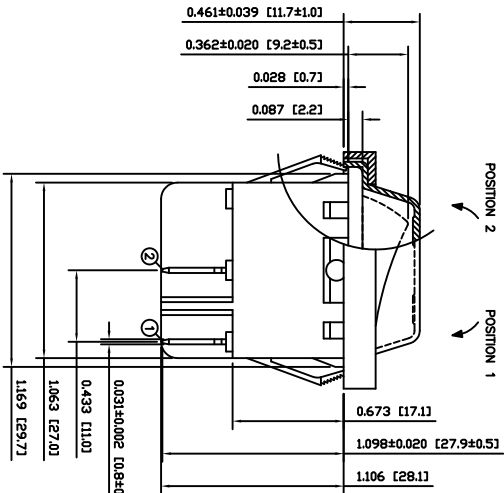


SCHEMATIC

SPECIFICATIONS

FUNCTION:
2P1T OFF-ONRATINGS:
ANSI/UL 1054 and CAN/CSA C22.2 No. 55 (E194579):
20A 125VAC [UR, cULR]
18A 125VAC 1/4HP [cULR]
16A 250VAC 1/4HP [cULR]
6.9A 250VAC 3/4HP [cULR]ANSI/UL 1054 (233821):
16A 125VAC 1/4HP [CSAus]
16A 250VAC 1/4HP [CSAus]EN 61058-1:2002 and DIN/VDE 0650-1:2003-03 (40017928):
16(6) 250V~ 1125/55 1E4 [ENEC10, VDE]
10(2) 250V~ 1125/55 5E4 [ENEC10, VDE]
16(4) 250V~ 1125/55 1E4 [ENEC10, VDE]ILLUMINATION VOLTAGE:
125VCONTACT RESISTANCE:
Initial: 20mΩ Max.INSULATION RESISTANCE:
100MΩ Min. at 500VDCDIELECTRIC STRENGTH:
1,000VAC For 1 MinuteELECTRICAL LIFE:
6,000 Cycles [cULRus, CSAus]
10,000 Cycles [ENEC10, VDE: 16(8)A 250V~]
50,000 Cycles [ENEC10, VDE: 10(2)A 250V~]TEMPERATURE:
-20°C to 65°C [cULRus]
-20°C to 125°C [ENEC10, VDE]

APPROVALS:




COLORS AND MARKINGS

BODY:
Block
ACTUATOR:
Transparent Green
MARKING:
I/O Vertical (1)
MARKING COLOR:
White
FRAME:
Block

MATERIALS

BODY:
Polyamide 6/6 (PA66), UL94 V-2
ACTUATOR:
Polycarbonate (PC), UL94 V-2
LAMP CARRIER:
Polyamide 6/6 (PA66), UL94 V-2
LAMP:
Neon Bulb
SPRING:
Phosphor Wire
CONTACTS:
Silver Alloy
TERMINALS:
Silver Plated Copper
Silver Plated Brass
CAP:
Polyvinyl Chloride (PVC)
FRAME:
Polyamide 6/6 (PA66), UL94 V-2

SUGGESTED PANEL CUTOUT



PANEL THICKNESS	X
0.030~0.049 [0.75~1.25]	1.189 [30.2]
0.048~0.078 [1.25~2.00]	1.200 [30.5]

ACTUATOR	A	09/07/02	CAB
BODY	A	09/07/06	CAB
COLORS	A	09/06/13	CAB
MATERIALS	A	09/07/06	CAB
SPECIFICATIONS	A	09/07/02	CAB
REFERENCE	REV.	DATE	BY

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSMITTED

UPDATE DESCRIPTION	20043	12/22/11	BMA
INITIAL RELEASE	11893	10/02/22	CAB
DESCRIPTION	PCR	DATE	DRAWN BY

INCHES [MILLIMETERS]
±0.008 [±0.2] / ±1'
PROJECTION

RB242D1021-136ACCF021

DATE: FEBRUARY 22, 2010
REVISION: B