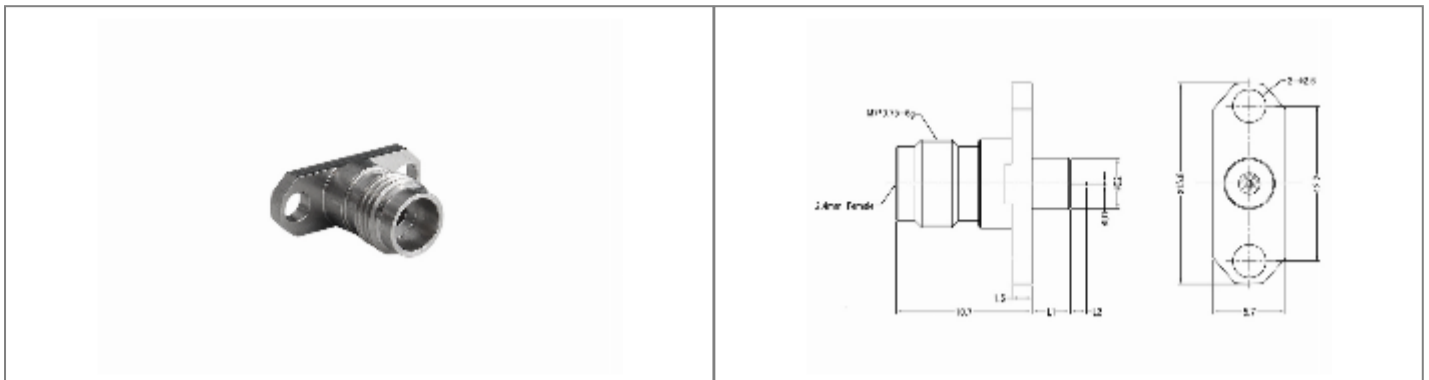


RF240A2JEGADAA Datasheet

Product Name // 2.4mm Jack Straight 2 Hole Flange RF Connector

[View Product Page](#)


// Product Description:

- ⊕ 2.4mm Jack Straight 2 Hole Flange RF Connector
- ⊕ Maximum Voltage: 150V
- ⊕ Temperature range: -40Å°C to +85Å°C
- ⊕ Frequency range: 0GHz - 50GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >500V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	2.40mm Series Pin with Extended PTFE 2 Hole Flange
Product Family:	Radio Frequency Connectors
Product Series:	2.40mm Series
Weight:	1
Body Length:	10.80mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Min Coupling Torque:	0.80Nm
Max Coupling Torque:	1.10Nm
Dielectric Withstanding Voltage:	>500V
Durability:	>500 cycles
Flange Mount Length:	15.80mm
Function:	Female Flange Mount RF Connector
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	UNFILLED ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Mount Hole Distance:	12.20mm
Min Operating Frequency:	0GHz
Max Operating Frequency:	50GHz
Pin Diameter:	0.30mm
Pin Length:	1.50mm
Ptfe Diameter:	1.67mm
Ptfe Length:	1.40mm
Voltage Max:	150V
Vswr:	<1.30

// Product PDF Links

[2.40mm Series Product Datasheet](#)

// Product 3D CAD Model Links

[RF240A2JEGADAA3D CAD Model](#)