


# RFAA240P350P Datasheet

## Product Name // 2.4mm Plug to 3.5mm Plug RF Adapter

[View Product Page](#)

\* Representative product image only

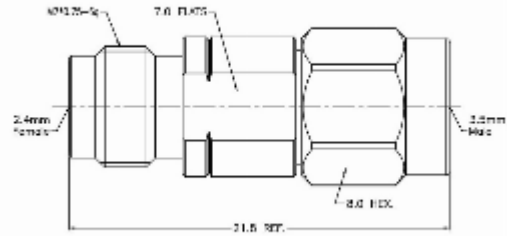

### // Product Description:

- ⊞ 2.4mm Plug to 3.5mm Plug RF Adapter
- ⊞ Maximum Voltage: 250V
- ⊞ Temperature range: -40Å°C to +85Å°C
- ⊞ Frequency range: 0GHz - 33GHz
- ⊞ VSWR:
- ⊞ Dielectric withstanding Voltage: >750V
- ⊞ Impedance: 50Ohm
- ⊞ Body Material: Stainless Steel Passivation
- ⊞ Contact Material: Beryllium Copper

### // General Information:

Product Display Title:	RF Adapter Series 2.40mm Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	20.50mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>20N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male to Male RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	ULTEM 1000/PEI
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	33GHz
Voltage Max:	250V
Vswr:	<1.15

#### // Product PDF Links

[RF Adapter Series Product...](#)

#### // Product 3D CAD Model Links

[RFAA240P350P3D CAD Model](#)