


RFAA292J350P Datasheet

Product Name // 2.92mm Jack to 3.5mm Plug RF Adapter

 View Product Page

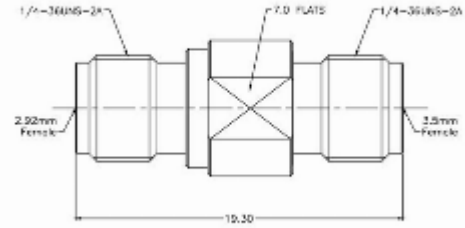

// Product Description:

- ⊕ 2.92mm Jack to 3.5mm Plug RF Adapter
- ⊕ Maximum Voltage: 250V
- ⊕ Temperature range: -40Å°C to +85Å°C
- ⊕ Frequency range: 0GHz - 33GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|-----------------------------------|
| Product Display Title: | RF Adapter Series 2.92mm Straight |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Weight: | 1 |
| Body Length: | 20.50mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >20N |
| Contact Pin Material: | Beryllium Copper |
| Dielectric Withstanding Voltage: | >750V |
| Durability: | >500 cycles |
| Function: | Male to Female RF Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | ULTEM 1000/PEI |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 33GHz |
| Thread Size: | 1/4 36UNS 2A |
| Voltage Max: | 250V |
| Vswr: | <1.15 |

// Product PDF Links

 RF Adapter Series Product...

// Product 3D CAD Model Links

 RFAA292J350P3D CAD Model