








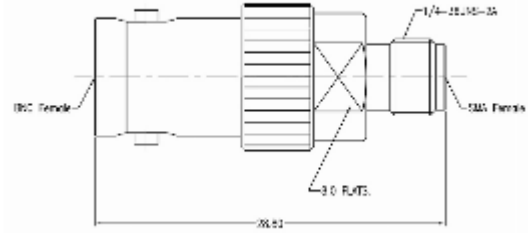


RFAABNCJSM AJ Datasheet

Product Name // BNC Jack to SMA Jack RF Adapter

 View Product Page



// Product Description:

-  BNC Jack to SMA Jack RF Adapter
-  Maximum Voltage: 335V
-  Temperature range: -65Å°C to +165Å°C
-  Frequency range: 0GHz - 8GHz
-  VSWR:
-  Dielectric withstanding Voltage: >750V
-  Impedance: 50Ohm
-  Body Material: Stainless Steel Passivation
-  Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series BNC Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	28.80mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female Bayonet to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	8GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links

 RF Adapter Series Product...

// Product 3D CAD Model Links

 RFAABNCJSM AJ3D CAD Model