


RFAABNCPSMAJ Datasheet

Product Name // BNC Plug to SMA Jack RF Adapter

[View Product Page](#)

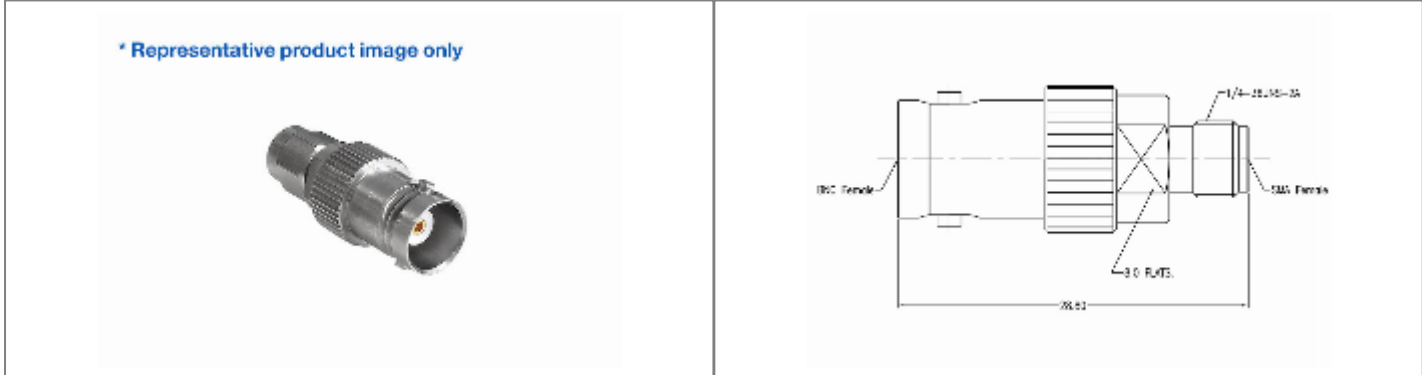

// Product Description:	
⊗ BNC Plug to SMA Jack RF Adapter	⊗ Dielectric withstanding Voltage: >750V
⊗ Maximum Voltage: 335V	⊗ Impedance: 50Ohm
⊗ Temperature range: -65Å°C to +165Å°C	⊗ Body Material: Stainless Steel Passivation
⊗ Frequency range: 0GHz - 8GHz	⊗ Contact Material: Beryllium Copper
⊗ VSWR:	

// General Information:	
Product Display Title:	RF Adapter Series BNC Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	26.90mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Male Bayonet to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	8GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAABNCPSMAJ3D CAD Model](#)