


RFAASMAJNJ Datasheet

Product Name // SMA Jack to N Jack RF Adapter

[View Product Page](#)

* Representative product image only

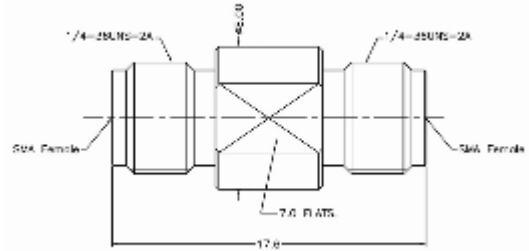

// Product Description:

- ⊗ SMA Jack to N Jack RF Adapter
- ⊗ Maximum Voltage: 335V
- ⊗ Temperature range: -40Â°C to +85Â°C
- ⊗ Frequency range: 0GHz - 18GHz
- ⊗ VSWR:
- ⊗ Dielectric withstanding Voltage: >750V
- ⊗ Impedance: 50Ohm
- ⊗ Body Material: Stainless Steel Passivation
- ⊗ Contact Material: Beryllium Copper

// General Information:

Product Display Title:	RF Adapter Series SMA Straight
Product Family:	Radio Frequency Connectors
Product Series:	RF Adapter Series
Weight:	1
Body Length:	35.70mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female to Female RF Adapter
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+85°C
Min Operating Temperature:	-40°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	1/4 36UNS 2A & 5/8 24UNEF 2A
Voltage Max:	335V
Vswr:	<1.15

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAASMAJNJ3D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)