


RFAASMAJNP Datasheet

Product Name // SMA Jack to N Plug RF Adapter

[View Product Page](#)

* Representative product image only

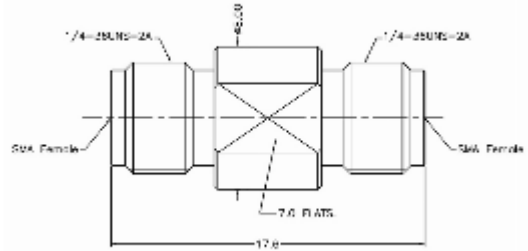

// Product Description:

- ⊕ SMA Jack to N Plug RF Adapter
- ⊕ Maximum Voltage: 335V
- ⊕ Temperature range: -40Â°C to +85Â°C
- ⊕ Frequency range: 0GHz - 18GHz
- ⊕ VSWR:
- ⊕ Dielectric withstanding Voltage: >750V
- ⊕ Impedance: 50Ohm
- ⊕ Body Material: Stainless Steel Passivation
- ⊕ Contact Material: Beryllium Copper

// General Information:

| | |
|----------------------------------|--------------------------------|
| Product Display Title: | RF Adapter Series SMA Straight |
| Product Family: | Radio Frequency Connectors |
| Product Series: | RF Adapter Series |
| Weight: | 1 |
| Body Length: | 37.90mm |
| Body Material: | Stainless Steel Passivation |
| Centre Contact Retention Force: | >26.7N |
| Contact Pin Material: | Beryllium Copper |
| Dielectric Withstanding Voltage: | >750V |
| Durability: | >500 cycles |
| Function: | Male to Female RF Adapter |
| Impedance: | 50Ohm |
| Insulation Resistance: | >5000MOhm |
| Insulator: | Adapter ASTM D 1710 |
| Max Operating Temperature: | +85°C |
| Min Operating Temperature: | -40°C |
| Min Operating Frequency: | 0GHz |
| Max Operating Frequency: | 18GHz |
| Thread Size: | 1/4 36UNS 2A |
| Voltage Max: | 335V |
| Vswr: | <1.15 |

// Product PDF Links

[RF Adapter Series Product...](#)

// Product 3D CAD Model Links

[RFAASMAJNP3D CAD Model](#)


Have a question or project enquiry
you'd like to talk to us about?



[Click Here To Contact Us](#)