


RFTERMSMAJ2W Datasheet

Product Name // SMA Jack Termination (2W)

[View Product Page](#)

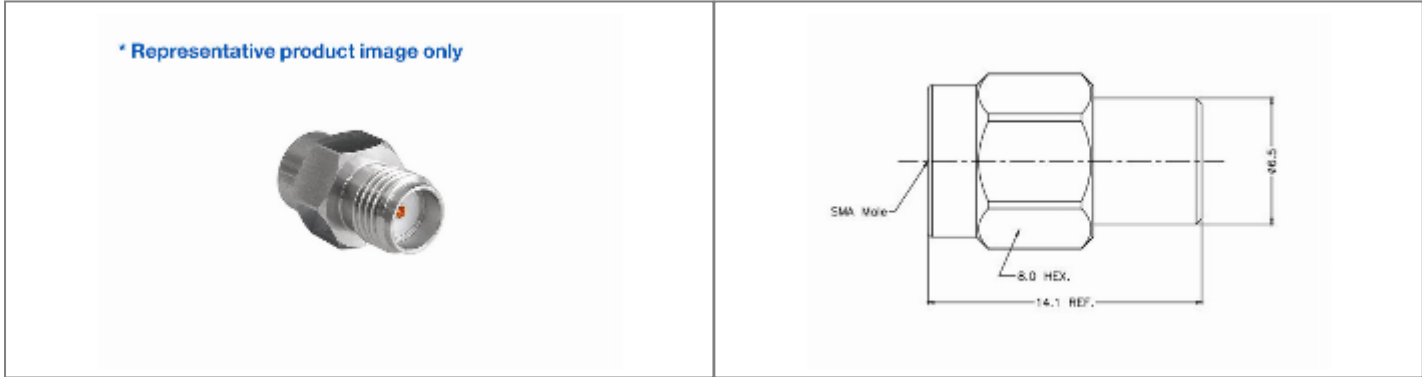

// Product Description:	
<ul style="list-style-type: none"> SMA Jack Termination (2W) Maximum Voltage: 335V Temperature range: -65Å°C to +165Å°C Frecuency range: 0GHz - 18GHz VSWR: 	<ul style="list-style-type: none"> Dielectric withstanding Voltage: >750V Impedance: 50Ohm Body Material: Stainless Steel Passivation Contact Material: Beryllium Copper

// General Information:	
Product Display Title:	RF Termination Series SMA
Product Family:	Radio Frequency Connectors
Product Series:	RF Termination Series
Weight:	1
Average Power:	<2W
Body Length:	12.20mm
Body Material:	Stainless Steel Passivation
Centre Contact Retention Force:	>26.7N
Contact Pin Material:	Beryllium Copper
Dielectric Withstanding Voltage:	>750V
Durability:	>500 cycles
Function:	Female RF Termination
Impedance:	50Ohm
Insulation Resistance:	>5000MOhm
Insulator:	Adapter ASTM D 1710
Max Operating Temperature:	+165°C
Min Operating Temperature:	-65°C
Min Operating Frequency:	0GHz
Max Operating Frequency:	18GHz
Thread Size:	1/4 36UNS 2A
Voltage Max:	335V
Vswr:	<1.20

// Product PDF Links

[RF Termination Series Product...](#)

// Product 3D CAD Model Links

[RFTERMSMAJ2W3D CAD Model](#)