

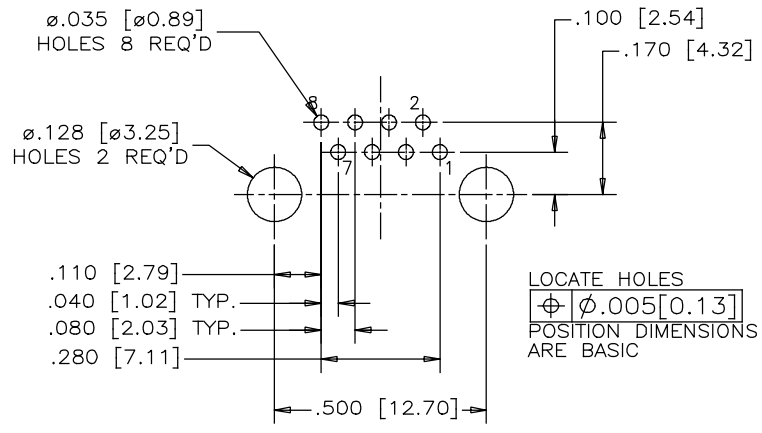
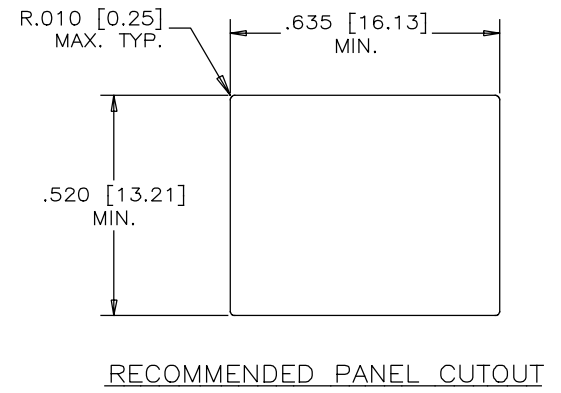


REVISIONS			
REV	DESCRIPTION, ECN, EAR NO.	DATE	APP'D
A	PROPOSAL	JULY26/17	L.CHAN

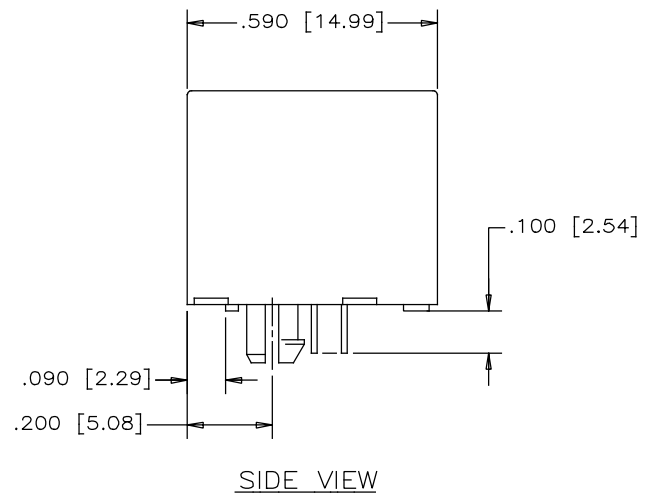

LOCATE HOLES
 $\phi \phi.005 [0.13]$
 POSITION DIMENSIONS
 ARE BASIC

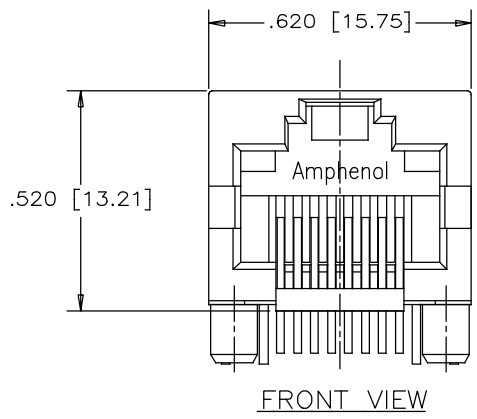

MATERIALS:

HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0
 COLOR: BLACK

CONTACTS:

PHOSPHOR BRONZE
 PLATING: 50 μ " [1.27 MICRONS]
 MIN. GOLD ON MATING SURFACES.
 50 μ " [1.27 MICRONS]
 MIN. NICKEL UNDERPLATE
 100 μ " [2.54 MICRONS]
 MIN. MATTE TIN ON CONTACT TAILS.

PART NUMBER: RJHSE-5080-010-A

UNLESS SPECIFIED OTHERWISE	DRAWN	W.QIU	DATE	JULY26/17
PRIMARY UNITS INCH	CHECKED	L.CHAN	DATE	JULY26/17
SECONDARY MILLIMETER	M.E. APP'D			
REFERENCE IN PARENTHESES	Q.A. APP'D			
GENERAL TOLERANCES	DWG APPR.			
1 DECIMAL PLACE ± 0.025	ENG. REL. NO.			
2 DECIMAL PLACES ± 0.020	REF.			
3 DECIMAL PLACES ± 0.015	THIRD ANGLE PROJECTION			
ANGULAR DEGREES $\pm 1.0^\circ$	DO NOT SCALE DRAWING			

Amphenol Canada Corp.
 www.amphenolcanada.com

TITLE
 SINGLE-PORT HIGH SPEED RJ45
 MODULAR JACK, WITHOUT LEDS, 8P8C, TRAY
 PACKAGING, NO SHIELD-RoHS COMPLIANT

DWG. NO. P-RJHSE-5080-010-A

CODE ID NO. 03554 | DWG SIZE: C | SCALE: N/A | SHEET 1 OF 1