


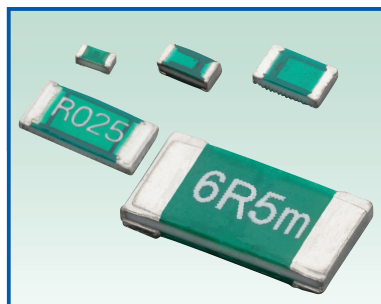

Low resistance chip resistors (short-side terminals type)

■ This series includes (some of) former RP and RPH series

Features

- The distinctive structure that encourages heat dissipation and radiation limits the rise of the surface temperature, allows the realization of smaller sizes, and reduces the influence of heat on surrounding components.

Applications

- PCs, power sources, mobile phones, automotive electronics, adaptor and industrial machining equipment.




* 1 : Except for RL0510, RL1632, RL3264

Specifications

* All made to order.

Dimensions

unit : mm



Dimension (inch)	RL0510 (0402) (OLD:RP1005 included)		RL0816 (0603) (OLD:RP1608,RPH1608 included)		RL1220 (0805) (OLD:RP2012 included)		RL1632 (1206)	RL3264 (2512)
	$R \leq 0.2\Omega$	$R > 0.2\Omega$	$R \leq 0.082\Omega$	$R > 0.091\Omega$	$R \leq 0.068\Omega$	$R > 0.075\Omega$		
L	1.00±0.05		1.60±0.20		2.00±0.20		3.20±0.20	6.40±0.20
W	0.50±0.05		0.80±0.20		1.25±0.20		1.60±0.20	3.20±0.20
A	0.15±0.10		0.20±0.15		0.40±0.20		—	—
B	0.25±0.10	0.15±0.10	0.25±0.20	0.20±0.15	0.40±0.20		1.00±0.15	2.00±0.15
T	0.35±0.15/-0.10	0.35±0.10	0.45±0.15/-0.10	0.45±0.10	0.50±0.20	0.40±0.10	0.50±0.15	0.50±0.15

NOTE Obsolete: RP1005, RP1608, RPH1608, RP2012
Alternative P/N: RL0510, RL0816, RL1220


Electrical characteristics

Series name		RL0510 (OLD : RP1005 included)			RL0816 (OLD:RP1608,RPH1608 included)			RL1220 (OLD:RP2012 included)			
Power		1/8W	1/6W (OLD : RP1005 included)		1/4W (OLD : RPH1608)	1/5W (OLD : RP1608)		1/4W		1/3W (OLD : RP2012)	
E series offered		E-24									
Resistance range (Ω)		R<0.05~0.1	0.1 ~ 4.7	5.1 ~ 47	R<0.02~0.1	0.1 ~ 6.8	7.5 ~ 68	0.01~0.039	0.043~0.091	0.1 ~ 10	11 ~ 100
Resistance tolerance (%)	±1.0 (F)	○	○	○	○	○	○	○	○	○	○
	±2.0 (G)	○	○	○	○	—	○	○	○	○	○
	±5.0 (J)	—	—	○	○	—	○	○	○	○	○
Temperature coefficient of resistance (ppm/℃)	0~+100(R)	—	—	—	—	○	—	—	—	○	—
	0~+200(S)	—	○	○	○	○	○	—	○	○	○
	0~+350(T)	○	—	—	○	—	—	○	○	—	—
Maximum voltage		$\sqrt{(P \cdot R)}$									
Operating temperature		-55 ~ 125℃									
Packaging	5,000pcs	—			○						
	10,000pcs	○			—						


Series name		RL1632					
Power		1/ 2W					
E series offered		E-24					
Resistance range (Ω)		0.01~0.016	0.018~0.024	0.027~0.03	0.033~0.051	0.056~0.47	0.51~4.7
Resistance tolerance (%)	±0.5 (D)	—	—	—	—	—	○
	±1.0 (F)	—	—	○	○	○	○
	±2.0 (G)	○	○	○	○	○	—
Temperature coefficient of resistance (ppm/°C)	0~+100(R)	—	—	—	—	○	○
	0~+200(S)	—	—	—	○	—	—
	0~+350(T)	—	○	○	—	—	—
	0~+500(T)	○	—	—	—	—	—
Maximum voltage		$\sqrt{P \cdot R}$					
Operating temperature		-55~125°C					
Packaging		5,000pcs					

Series name		RL3264				
Power		1W				
E series offered		Standard stock item : E-24series E-12series				
Resistance range (Ω)		0.01 ~ 0.015	0.018 ~ 0.022	0.027	0.033 ~ 0.047	0.056 ~ 0.47
Resistance tolerance (%)	±0.1 (B)	—	—	—	—	—
	±0.5 (D)	—	—	—	—	—
	±1.0 (F)	—	—	○	○	○
	±2.0 (G)	○	○	○	○	○
	±5.0 (J)	—	—	—	—	—
Temperature coefficient of resistance (ppm/°C)	0 ~ +100 (R)	—	—	—	—	○
	0 ~ +200 (S)	—	—	—	○	—
	0 ~ +350 (T)	—	○	○	—	—
	0 ~ +500 (T)	○	—	—	—	—
Maximum voltage		$\sqrt{P \cdot R}$				
Operating temperature		-55 ~ 125°C				
Packaging		5,000pcs				

Power derating characteristics

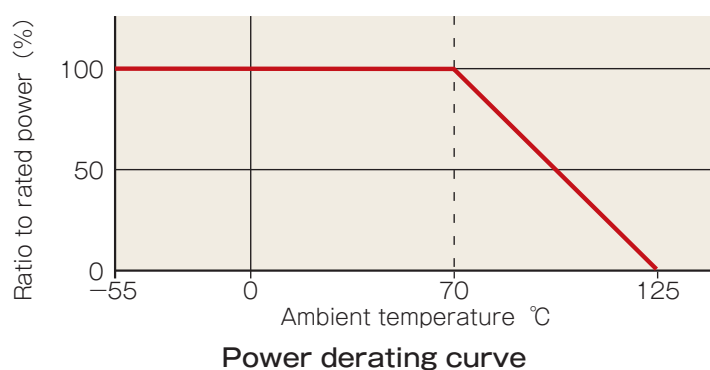

Resistance to power pulse

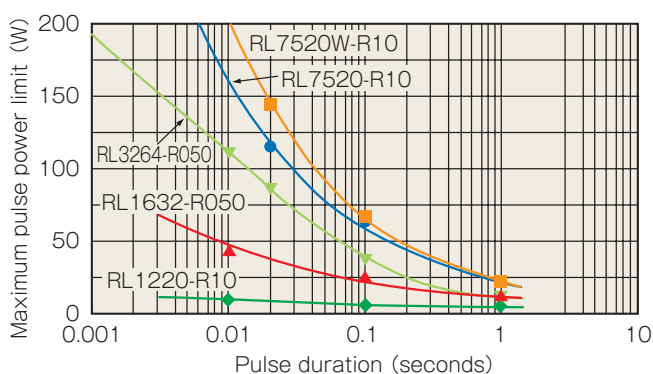

Test procedure

Voltage pulse is applied to the test samples mounted on the test board.

After each pulse, resistance drift is measured. Pulse voltage is increased until the drift exceeds +/-0.5%. The power at that voltage is defined as the maximum pulse power.

Part numbering system

