



Wire Protection & Management > Interconnect Devices > SolderSleeve Shield Terminators



Operating Temperature (Max): **200 °C**

Expanded Inside Diameter (Min): **2.67 mm [.105 in]**

Recovered Inside Diameter (Max): **1.4 mm [.055 in]**

Pre-Installed Lead: **Yes**

Resistance Properties: **Immersion Protection**

Features

Product Type Features

Interconnect Device Splice Type	Shield Terminator
Temperature Indicator	Yes
Temperature Indicator Type	Fusible Ring

Configuration Features

Pre-Installed Lead Type	AS22759/91-22-9
Pre-Installed Lead	Yes

Body Features

Lead Color	White
Lead Plating Material	Nickel
Lead Stranding	Stranded

Dimensions

Pre-Installed Lead Wire Size	.38 mm ²
Dielectric Outside Diameter (Max)	2.65 mm[.105 in]
Shield Outside Diameter (Min)	1.4 mm[.055 in]
Compatible Jacket Diameter Range	2.65 mm[.104 in]
Product Length	16.5 mm[.65 in]
Expanded Inside Diameter (Min)	2.67 mm[.105 in]
Recovered Inside Diameter (Max)	1.4 mm[.055 in]

Usage Conditions



Operating Temperature (Max)	200 °C
Resistance Properties	Immersion Protection
Wire Temperature (Max)	150 °C

Industry Standards

Government Qualified	No
----------------------	----

Product Compliance

[For compliance documentation, visit the product page on TE.com>](#)

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Low Bromine/Chlorine - Br and Cl < 900 ppm per homogenous material. Also BFR /CFR/PVC Free
Solder Process Capability	Not applicable for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: <https://echa.europa.eu/guidance-documents/guidance-on-reach>

Compatible Parts




TE Part # EG8162-000
HL1920E-230V-EURO

Customers Also Bought



TE Part #D369-P66-NS0
369 6 WAY PLUG, NO CONTACTS,
SKT

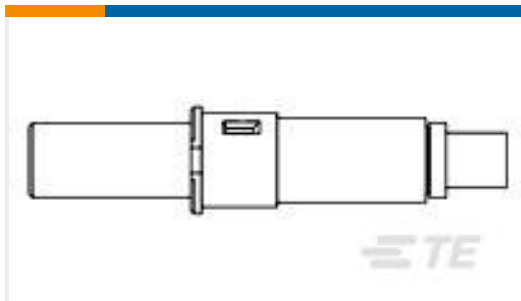

TE Part #1445692-4
ASY,PIN,QUADRAX



TE Part #5-1393104-6
KRPA-11DY-12=KRPA



TE Part #53417-1
TERMINAL,PIDG PVF2 R 16-14 8



TE Part #ZPF000000001137993
787-8055-13M



TE Part #YDTS24F19-32PAV001
RECP ASSY



TE Part #ZPF00000000102762
787-8055-10M



TE Part #ZPF00000000103332
104-0236-00



TE Part #2226455-1
SOCKET INSERT, 16-02 CABLE
APPLIED



TE Part #Y5660-212-25143000
CONT PIN

Documents

Product Drawings

[S200-2-W1-22-9](#)

English

Datasheets & Catalog Pages

[Raychem S200 Shield Terminators](#)

English

Product Specifications

[S200 SolderSleeve Shield Terminators](#)



English