




High Power UV-C LED

Product Specifications
6060 SMD Packaged LED

V1.6.2GHSP April 2020

6060 SMD Packaged LED Identification Convention

SMD6060 type package

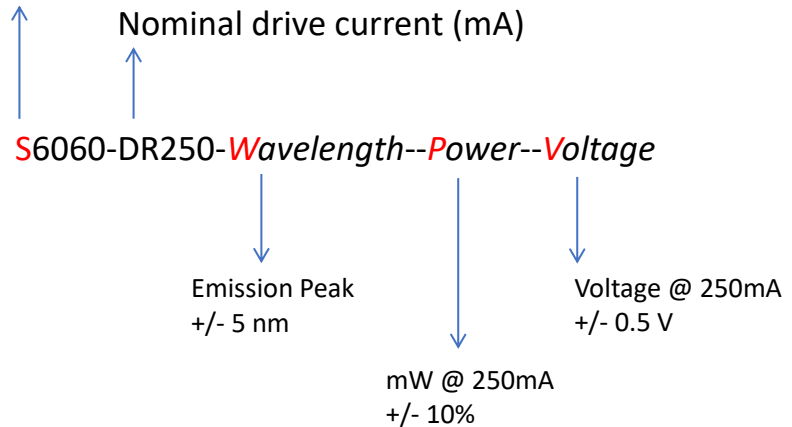

Example:

S6060-DR250-W275-P100-V6.5

Interpretation:

Surface Mount type 6.0 x 6.0 mm packaged LED
 Nominal Drive current = 250 mA
 Peak wavelength = 275 +/- 5nm
 Power output @ 250mA = 100 mW (+/-10%)
 Forward voltage @ 250mA = 6.5V (+/- 0.5V)

Product specifications subject to change without notice


6060 SMD Packaged LED Diagram

6060 SMD - KL



All unit in mm

① Anode (+)


② Cathode (-)

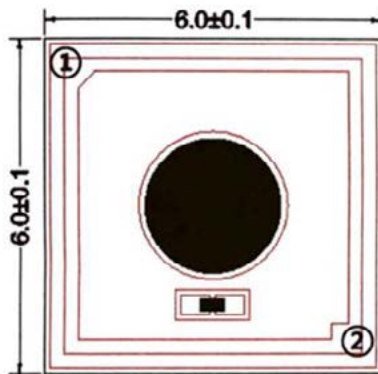


Bottom view

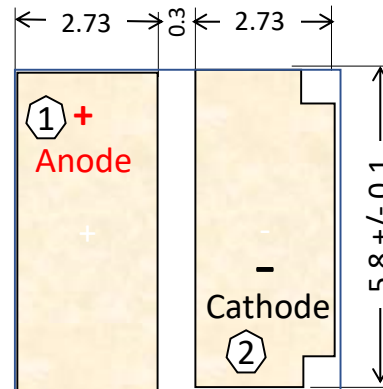

Recommended Solder Pattern on PCB

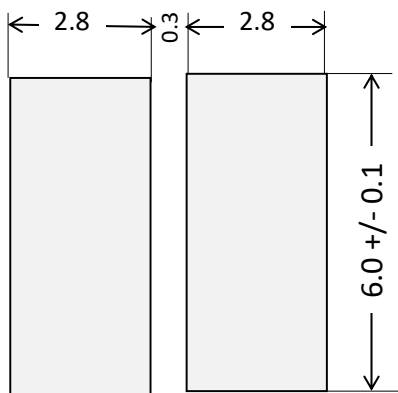

Electrical scheme of SMD

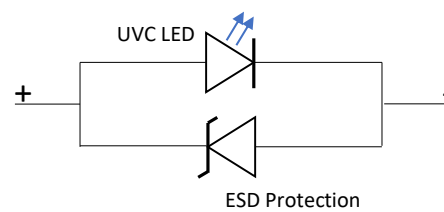

Specifications Subject to Change

UVC LED: Electro-optical parameters

TABLE 1. Performance @ 250 mA forward current (25°C ambient, packaged)

Parameter	Symbol	Unit	Min.	Typ.	Max
Peak Wavelength	λ_p	nm	265	272	278
Radiant Flux	ϕ_e	mW	90	100	110
Forward Voltage	VF	V	6.0	6.5	7.0
Spectrum Half Width	$\Delta\lambda$	nm		10	
View Angle	$2\theta_{1/2}$	°		150	
Thermal Resistance	RJ-b	°C/W		<10 (TBD)	

FIG 1. Forward Current vs. Forward Voltage
Please also check typical value and BIN structure on page 8


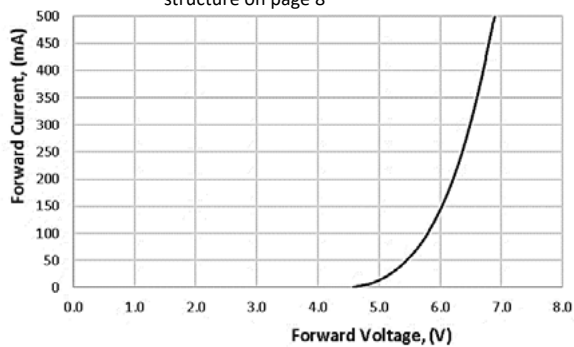


FIG 2. Relative Radiant Flux vs. Forward Current

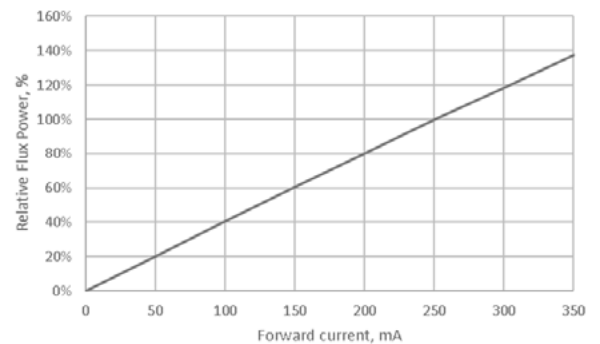

Specifications may subject to change without notice

UVC LED: Electro-optical parameters (continued)

FIG 3. Peak Wavelength vs. Forward Current

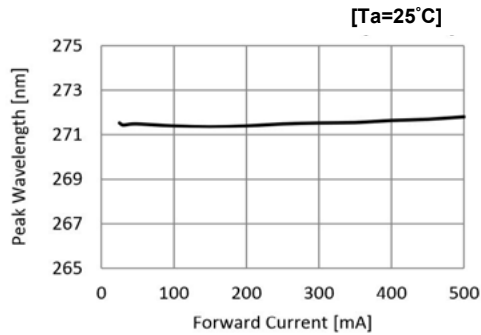


FIG 4. Spectrum

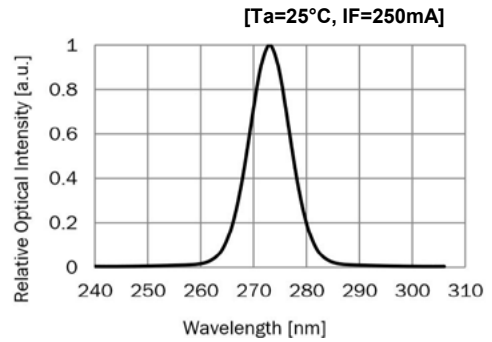


Fig 5. Forward Voltage vs Ambient Temperature

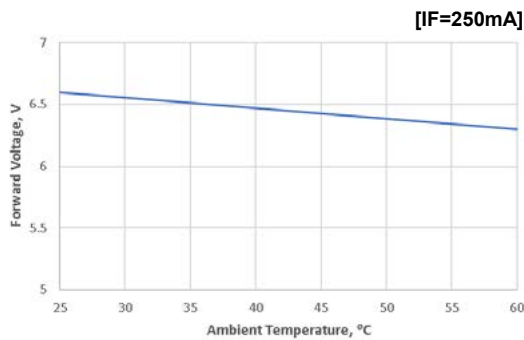


Fig 6. P-IF data vs SMD Temperature


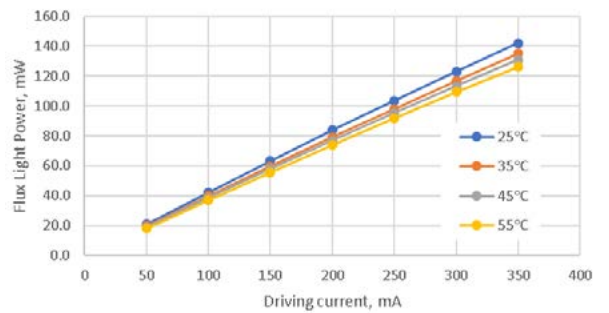


Fig 7. Far-field Emission Pattern (Relative Intensity vs. Emission Angle)

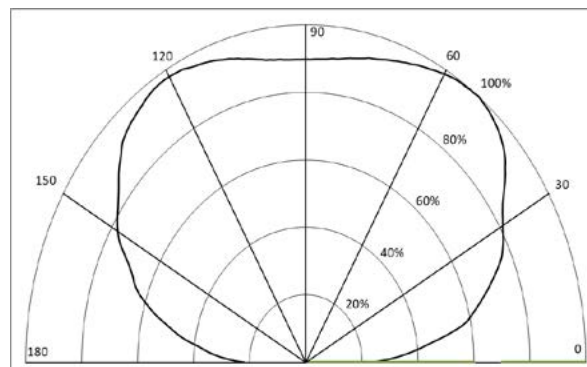

UVC LED: Electro-optical parameters (continued)

TABLE 2. Device lifetime (forward current =250mA, Tj < 55°C)

Parameter	Symbol	Unit	Min.	Typ.	Max
70% Power Lifetime	L70	hours	1500*	3000*	3000*

*Values based on standard Bolb test conditions 38C +/- 2°C solder-point temperature


*subject to change: please inquire about latest update

4-hour 65°C water immersion test passed without failure



Soldering conditions of UVC LED

FIG 8. Solder reflow temperature profile

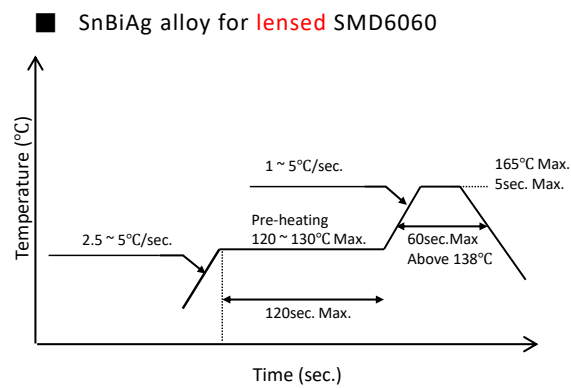

Reflow Soldering Instructions	
	SnBiAg alloy (Melting Temperature=138°C)
Pre-Heating	120 ~ 130°C
Pre-Heat Time	120sec. Max.
Peak Temperature	165°C Max.
Soldering Time	5sec. Max.

- Recommended solder composition: SnBiAg alloy or T3 soldering paste)
- Recommended stencil thickness is 60~80um
- Recommended stencil solder paste area is 60~80%
- Forming gas (5%-7% H_2 in N_2) ambient recommended for best results
- After reflow soldering, Rapid cooling should be avoided
- When soldering, do not use a none calibrated hot plate. A convection type reflow oven is preferred.

Handling Precautions

ESD Protection

Workplace setup should follow the recommendations given in JEDEC standard document JESD625B "Requirements for Handling Electrostatic-Discharge-Sensitive (ESDS) Devices" or IEC 61340-5-1,2 and 3. The operators should be properly trained to handle UVC flipchips according to the guidelines listed below:

- Always wear conductive wrist straps that is continuously monitored when working or handling assembled boards containing unprotected chips.
- Use an ion blower to neutralize the static discharge that may build up on the surface of the UVC flipchips during storage and handling.
- Always keep unused UVC flipchips in the protective ESD storage bag. Depending on the final application, it may be necessary to include additional ESD protection, such as a TVS protection diode on the substrate on which UVC flip chip is reflowed. Bolb Inc. includes a TVS chip inside each LED package.
- Use tweezers to pick up UVC LEDs, teflon coated tweezers would be recommended to avoid scratching UVC LEDs.
- Recommend holding the sidewalls of the LEDs (See Fig 10.)




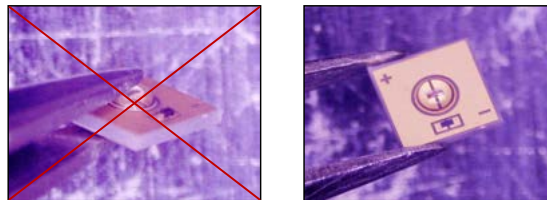




FIG 10. incorrect handling (left) and correct handling (right) of UVC LED Package

Packing

Carrier Tape & Reel Dimensions (unit = mm)

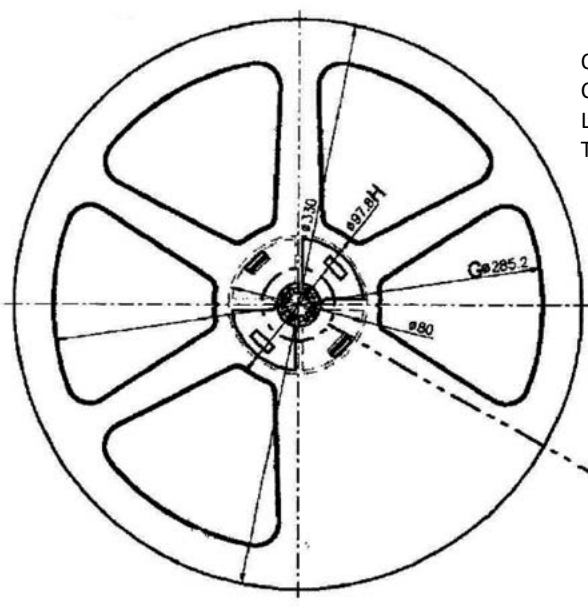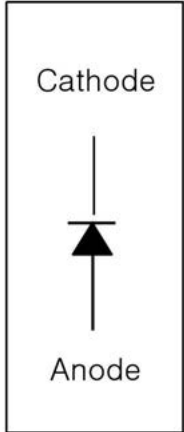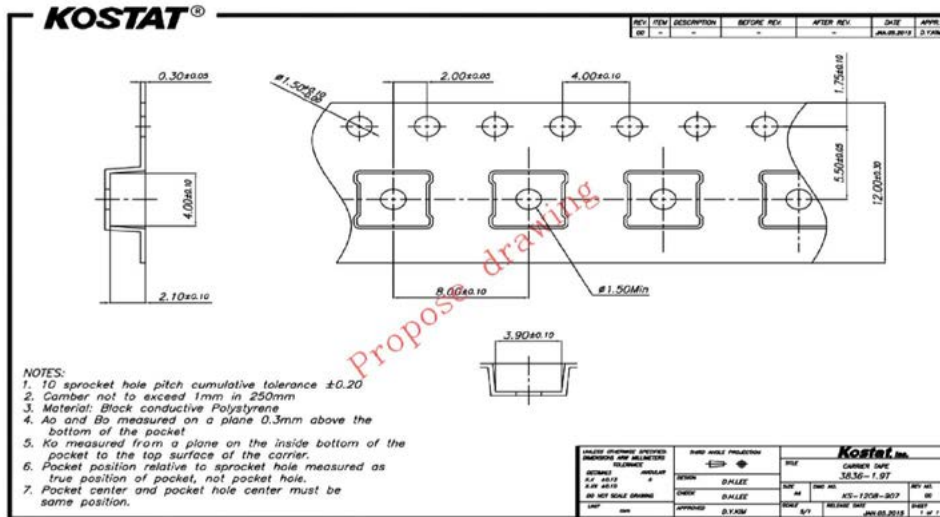

Quantity < 3,000 units/reel
 Cover tape adhesion < 0.7 Newtons
 Leader tape < 200 empty pockets
 Trailer < 60 empty pockets

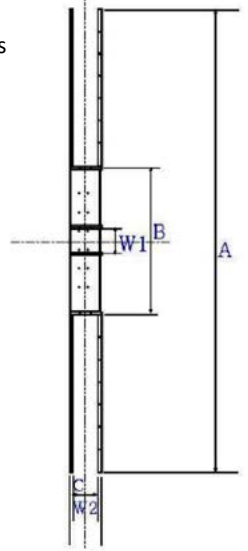

General Precautions and UVC Safety



UVC LEDs emit deep ultraviolet radiation, with extremely high intensity near its surface. This allows rapid disinfection but safety precautions must be observed during assembly and testing.

By purchasing the UVC chips (bare dice) or packaged LEDs from the manufacturer, the customer hereby agrees to absolve the manufacturer's responsibility of any bodily harm as a result of failure to observe the precautions, warnings and guidelines contained within this Specifications document.

All assembly workers, operators and bystanders must wear eye and skin protection when the UVC LEDs are energized. Bare-eye observation (including through microscopes) and bare-hand handling of a UVC LED in operation is **PROHIBITED**.

UVC light can be easily absorbed, so any oil or other absorbent liquid or solid substance must **NOT** be allowed to touch the sapphire side of the UVC chip, or the dome lens on a packaged LED.

Do not apply pressure to the dome lens on packaged LED.