

SMA M/M FLEXIBLE CABLES 6 GHZ RG142

SCA45142-XX

SPECIFICATIONS


CABLE ASSEMBLY:
VSWR: 1.2 dB MAX @ 6 GHZ

RAW CABLE: RG142
LOSS (EXCLUDING CONNECTORS)
@ 1GHZ: 0.13 DB/FT
@ 2GHZ: 0.19 DB/FT
@ 3GHZ: 0.24 DB/FT
@ 6GHZ: 0.35 DB/FT


OUTER DIAMETER: 0.195"

CONNECTORS:
SMA: NICKEL PLATED BRASS
CONTACTS: Au PLATING PER
INTERFACE: MIL-STD-348A

TORQUE WRENCH: 5 IN-IBS

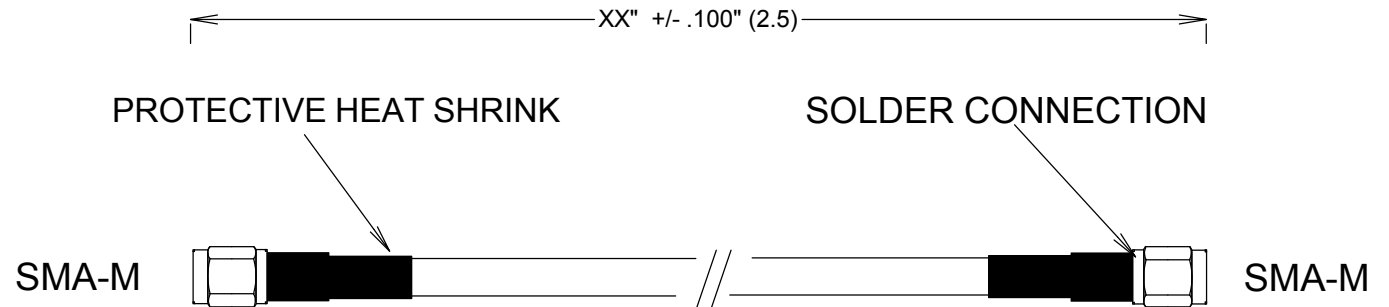

MEASUREMENTS BELOW ARE TYPICAL

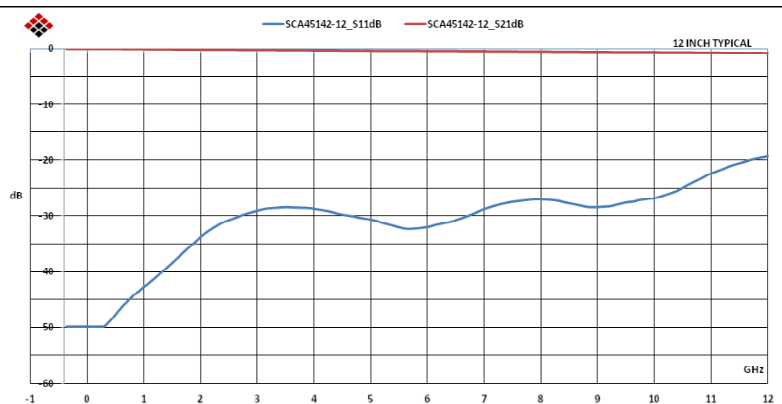

ALL DIMENSIONS IN inches(mm) Typical

FAIRVIEW MICROWAVE INC.

ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM

TITLE

SMA M/M FLEXIBLE CABLES 6 GHZ RG142

SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	SCA45142-XX	--
SCALE		SHEET	